

Opticom® Rack Mount Fiber Cassette Enclosures

specifications

The fiber cassette enclosure shall house, organize, manage and protect fiber optic cable, terminations, splices, connectors and patch cords. Enclosure shall accommodate all Panduit pre-terminated MPO cassettes, fiber adapter panels (FAP), and associated trunk cables, connectors and patch cords, and shall include integral cable management and bend radius control for transition to vertical cable managers. Fiber optic enclosure shall be constructed of steel material. Molded front and rear doors shall be removable for cabling and connector access and installation. A flat front door shall enable access to fiber without moving the drawer. Enclosure shall provide full front access with a drawer that slides out and tilts down regardless of how many enclosures are stacked together. 1 RU enclosure shall be available in an open-access version which allows patch cord access from both top and bottom of the enclosure housing. Enclosure shall have multiple knockouts for a variety of trunk cable entry points.



technical information

Dimensions:	FCE1U, FCE1UA:	1.72"H x 17.6"W x 17.9"D (43.8mm x 447mm x 455mm), 1 RU
	FCE2U:	3.47"H x 17.6"W x 17.9"D (88.2mm x 447mm x 455mm), 2 RU
	FCE4U:	6.8"H x 17.6"W x 16.8"D (172.7mm x 447mm x 426.4mm), 4 RU
Mounting:	Integral mounting flange for installation in 19" wide EIA-310 racks	
Accessories:	Mounting hardware and accessory kit with labels included	

key features and benefits

Modular design mounts up to 4 Opticom® QuickNet™ Cassettes or FAPs per RU:	Provides higher patch field density in fewer rack units saving valuable space
Works with all Panduit Opticom Fiber Optic Cassettes and Fiber Adapter Panels:	Provides versatility and flexibility with a fully modular solution for a variety of pre-terminated installations, FAP and field termination, and splicing installations. Works with all Panduit LC, SC, ST, MPO fiber adapter panels and cassettes
Hinged, swing down front door:	Enables access to fiber optic patch cords without needing to move drawer for easier moves, adds, and changes; enables stacking for reduced real estate
Slide-out, tilt-down drawer:	Offers total front access to all patch cords and rear cables for in-cabinet and top-of-rack mounting locations
Integral cable management:	Ensures proper cable routing, bend radius control, and rear slack storage for all patch cords, interconnect cables, and trunk cables
New fiber optic splice module:	Can fusion splice up to 96 fibers per RU in a single enclosure with one-to-one splice-to-patching ratio
TIA-606-A compatible labeling:	Standards-based, mechanically printed labeling of fiber connectivity, patchfields, and enclosures enables clear and accurate labeling for easy moves, adds and changes

applications

Opticom Rack Mount Fiber Cassette Enclosures provide a system for managing fiber terminations, connections, and patching in all types of applications. The enclosures are a component of the Opticom Fiber Cabling System. They are ideal for fast, reliable patch field creation in cross-connect or interconnect main distribution areas (MDA) or horizontal distribution areas (HDA) for storage area network (SAN) patching. The enclosure can also serve as a transition point for pre-terminated MPO interconnect or trunk cables patched to active equipment in data center server cabinets or LAN switch racks. The enclosures provide high patch field densities with the FCE1U housing up to 96 fibers in 1 RU, the FCE2U housing up to 192 fibers in 2 RU, and the FCE4U housing up to 288 fibers in 4 RU. Integral cable management, bend radius control, and slack management features protect fiber optic cables, patch cords, and connectors to ensure end-to-end signal integrity.

Splice Modules and Holders

Splice module (fusion):	FOSMF
Splice module (mechanical):	FOSMM
Splice module holder for FCE1U:	FOSMH1U
Splice module holder for FCE2U:	FOSMH2U
Splice module holder for FCE4U:	FOSMH4U

Tools and Accessories

Panduit connector removal tool:	PCRT1
Fiber slack spool 1 RU:	FMS1
Fiber slack spool 2 RU:	FMS2
Bend radius clip:	FEBRC


Opticom Rack Mount Fiber Cassette Enclosures

fiber capacities

Opticom Cassette Type	Enclosure Fiber Count		
	FCE1U/FCE1UA (holds up to 4 FAPs or cassettes)	FCE2U (holds up to 8 FAPs or cassettes)	FCE4U (holds up to 12 FAPs or cassettes)
12 duplex LC adapters to 2 MPO	96	192	288
6 duplex LC adapters to 1 MPO	48	96	144
6 duplex SC adapters to 1 MPO	48	96	144
3 duplex SC adapters to 1 MPO	24	48	72
6 simplex ST adapters to 1 MPO	24	48	72

Fiber Adapter Panel Type	Enclosure Fiber Count		
	FCE1U/FCE1UA	FCE2U	FCE4U
12 duplex LC adapters	96	192	288
8 duplex LC adapters	64	128	192
6 duplex LC adapters	48	96	144
6 duplex SC adapters	48	96	144
4 duplex SC adapters	32	64	96
3 duplex SC adapters	24	48	72
6 simplex ST adapters	24	48	72

Opticom Rack Mount Fiber Cassette Enclosures

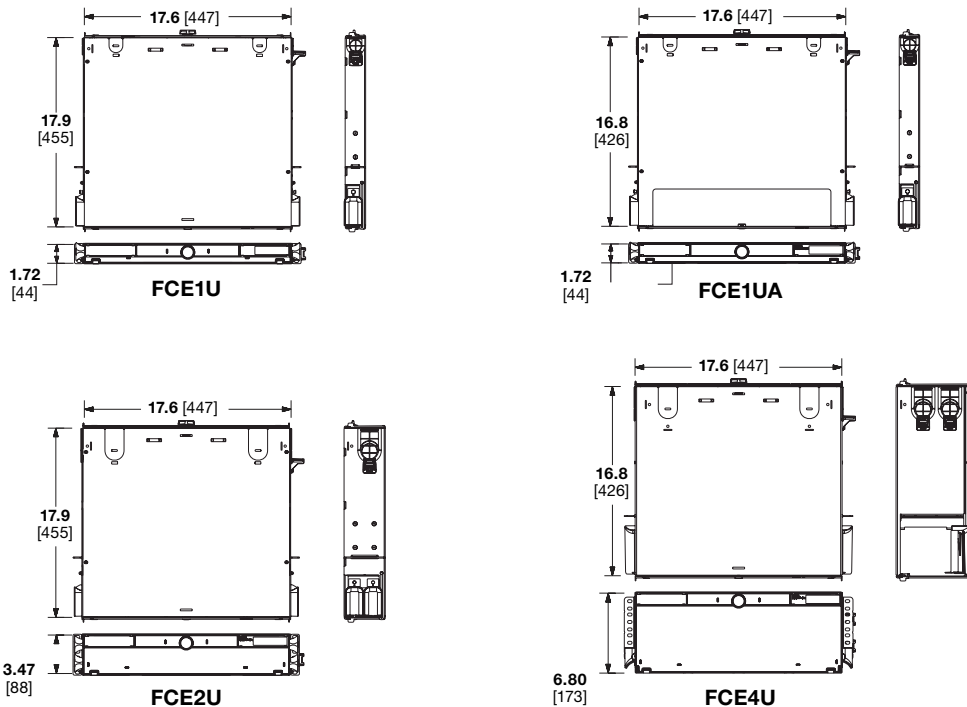

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT[®]

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2022 Panduit Corp.
ALL RIGHTS RESERVED.
RKSP201-WW-ENG
Replaces RKSP40--WW-ENG
12/2022