

## Cooper Bussmann

[Homepage](#)  
[About Cooper Bussmann](#)  
[Contact Us](#)  
[Privacy](#)  
[Legal](#)  
[Cooper Bussmann® Brand](#)  
[Site Map](#)



## FNQ-2

Time-Delay Supplementary Fuse, 500V, 2A, 13/32 - 1-1/2 Inches

### Product Information

|                 |                  |
|-----------------|------------------|
| Product Type:   | Fuse             |
| Product Family: | Electrical Power |
| Brand:          | Cooper Bussmann  |

### Recommended Products

|                               |                               |
|-------------------------------|-------------------------------|
| Rec. Fuse Block:              | <a href="#">BM603 Series</a>  |
| Rec. Inline Fuse Holder:      | <a href="#">HEB Series</a>    |
| Rec. Panel-mount Fuse Holder: | <a href="#">HPS Series</a>    |
| Rec. Modular Fuse Holder:     | <a href="#">CHM Series</a>    |
| Rec. Fuse Clips:              | <a href="#">5960 Series</a>   |
| Rec. Cover:                   | <a href="#">SAMI-7 Series</a> |

### Physical Properties

|             |                                  |
|-------------|----------------------------------|
| Dimensions: | 1.5in.(L) × 0.41in.(W) × 0in.(H) |
|-------------|----------------------------------|

### Certifications

[UL Listed](#)

[CSA Certified](#)

### Electrical Properties


|                          |   |
|--------------------------|---|
| Maximum AC Voltage:      | 500   |
| Amperage Rating:         | 2   |
| AC Interrupting Ratings: | <ul style="list-style-type: none"> <li>• 10000 at 500V</li> </ul> |
| Time Delay:              | Yes   |

# Tron® Time-Delay Fuses

FNQ

## 13/32" x 1-1/2" Midget

500 Volt, 1/10-30 Amps



- Fibre tube.
- Nickel plated brass endcaps.
- For motor control transformers and other circuits with in-rush currents.

**Catalog Symbol:** FNQ (5AG)

TIME-DELAY

1/10 TO 30A

500Vac (OR LESS)

**Interrupting Rating:** 10,000A

UL LISTED, STD 248-14, (GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED (CLASS 1422-01; FILE 53787)

### Catalog Symbol and Ampere Ratings


|            |            |            |        |
|------------|------------|------------|--------|
| FNQ-1/10   | FNQ-8/10   | FNQ-3-2/10 | FNQ-9  |
| FNQ-1/8    | FNQ-1      | FNQ-3-1/2  | FNQ-10 |
| FNQ-15/100 | FNQ-1-1/8  | FNQ-4      | FNQ-12 |
| FNQ-3/16   | FNQ-1-1/4  | FNQ-4-1/2  | FNQ-14 |
| FNQ-2/10   | FNQ-1-1/2  | FNQ-5      | FNQ-15 |
| FNQ-1/4    | FNQ-1-6/10 | FNQ-5-6/10 | FNQ-20 |
| FNQ-3/10   | FNQ-2      | FNQ-6      | FNQ-25 |
| FNQ-4/10   | FNQ-2-1/4  | FNQ-6-1/4  | FNQ-30 |
| FNQ-1/2    | FNQ-2-1/2  | FNQ-7      | —      |
| FNQ-6/10   | FNQ-3      | FNQ-8      | —      |

### Carton Quantity and Weight


| Ampere Ratings | Carton Qty | Weight* |      |
|----------------|------------|---------|------|
|                |            | Lbs.    | Kg.  |
| 1-30           | 10         | .180    | .082 |

\* Weight per carton.

### Time-Current Characteristic Curve—Average Melt

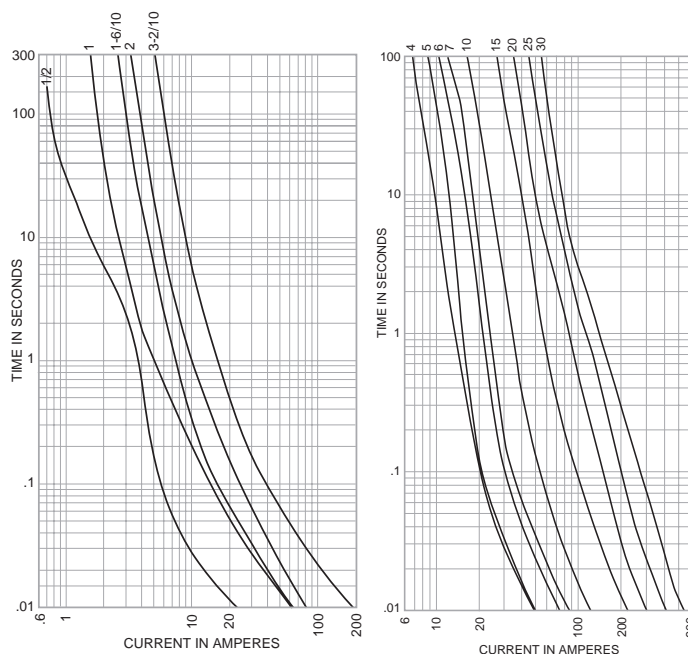

RMS SYMMETRICAL IN AMPERES



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

CE