LED PAR30 S/L

9.4PAR30L/COR/930/F25/DIM/120V T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General information

Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000

Light technical

Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	850 lm
Luminous Intensity (Nom)	2910 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and electrical

Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	9.4 W
Lamp Current (Nom)	90 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature

T-Case Maximum (Nom)	176 °F

Controls and dimming

Dimmable	Yes

Mechanical and housing

Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	PAR30L [PAR 3.75 inch/95mm Long]

Approval and application

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	– kWh
Energy Certifications	Energy Star

Product data

Order product name	9.4PAR30L/COR/930/F25/DIM/120V T20 6/1FB
EAN/UPC – Product	046677546960

LED PAR30 S/L

Order code	546969		**Net Weight (Piece)**	0.628 lb
Numerator – Quantity Per Pack	1			
Numerator – Packs per outer box	6			
Material Nr. (12NC)	929002045404			

Dimensional drawing

Product	D	C
9.4PAR30L/COR/930/F25/DIM/120V T20 6/1FB	3–13/16 in	4–11/16 in

9.4PAR30L/COR/930/F25/DIM/120V T20 6/1FB

Photometric data

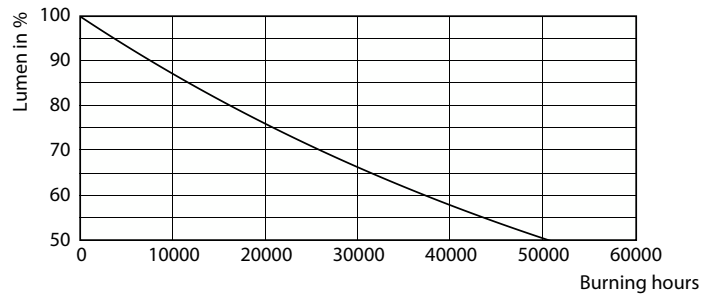**LEDspots 9,4W PAR30L E26 930 25D**
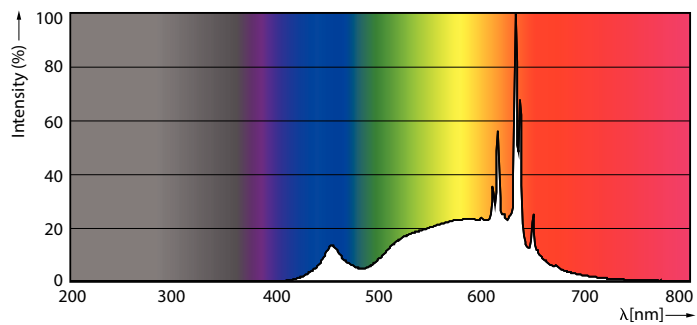
LEDspots 9,4W PAR30L E26 930 25D

LEDspots 9,4W PAR30L E26 930 25D

Lifetime

Life Expectancy Diagram

Lumen Maintenance Diagram

www.lighting.philips.com

2022, December 8 – data subject to change