



RoHS COMPLIANT

VJ5301M433MXBSR chip antenna product

Vishay™ VJ5301M868MXBSR chip antennas are covered by one or more of the following patents:

WO2008250262 (A1), US2008303720 (A1), US2008305750 (A1), WO2008154173 (A1).

Other patents are pending.

ELECTRICAL SPECIFICATIONS<sup>2</sup>

Operating Temperature: -40 °C to + 85 °C
Frequency Range (Transmission/Reception): 820 to 920 MHz

DESCRIPTION

The VJ5301M868MXBSR ceramic chip antenna is a small form-factor, high-performance, chip-antenna designed for operation at 868 MHz. It allows manufacturers to design high quality products that do not bear the penalty of a large external antenna, and is designed to be assembled onto a PC board using a standard reflow process.

The VJ5301M868 is the latest in a family of products developed by Vishay™, a world leader in manufacturing of discrete and passive components.

The VJ5301M868 series are small form-factor, high-performance chip-antennas optimized for medical, remote sensing, industrial, security, and RFID applications.

Utilizing unique Vishay™ materials and manufacturing technologies, these products when properly tuned also comply with the MBRAI standard for portable communication.

Features

- Small outline (35 mm x 5 mm x 1.2 mm)
50Ω unbalanced tuning interface (max. -1.96 dBi gain<sup>1</sup>)
Assembled onto a PCB in the standard reflow process
100 MHz half-power tuned bandwidth (820 to 920 MHz)
High-reliability ceramic-oxide body construction
Low-RF-loss, high-Q ceramic
Lead (Pb)-free / wet build process
Reliable Noble Metal Electrode (NME) system
Compliant to RoHS Directive 2002/95/EC
Halogen-free per IEC 61249-2-21
Wide operating temperature range (-40 °C to + 85 °C)

Applications

- Medical telemetry (internal / external)
Remote sensing and control
Industrial automation and telemetry
Security systems, home automation
Long range RFID

Table with 6 columns: SERIES, FREQUENCY (MHz), MAX. GAIN (dBi), AVERAGE GAIN (dBi), BANDWIDTH (- 10 dB) (MHz), BANDWIDTH (- 3 dB) (MHz). Row 1: VJ5301M868MXBSR, 868, -1.96, -4.96, 32, 100.

Table with 10 columns: NOMINAL FREQUENCY (MHz), NOMINAL IMPEDANCE (Ω), 868 MHZ AVERAGE GAIN (dBi), 868 MHZ PEAK GAIN (dBi), REFLECTED POWER COEFFICIENT S11, 868 MHZ REFLECTED POWER LOSS, - 3 dB BANDWIDTH 820 MHz to 920 MHz, - 3 dB REFLECTED POWER LOSS, - 10 dB BANDWIDTH 854 MHz to 886 MHz, - 10 dB REFLECTED POWER LOSS. Row 1: 868, 50, -4.96, -1.96, <-27 dB, 0.2 %, 100, 50 %, 32, 10 %.

Table 1 of quick reference data and chip antenna performance

1 See Figures 1 through 6 for more details on the radiation pattern (antenna gain) at 868 MHz; the PCB board ground is shorted to earth ground for tuning.

2 Electrical characteristics at +25 °C unless otherwise specified. Antenna performance is measured at 868 MHz and 50 Ohm impedance unless otherwise specified. The best results are obtained by mounting the chip following the layout guidelines application note for the evaluation kit.

# Preliminary Data Sheet

## VJ5301M868MXBSR Tuning

Final tuning configuration and component values for  $L_1$ ,  $L_2$ , and  $C_1$  depend on customer PCB layout. Optimal tuning is possible with just a few standard components. **The nominal values shown are for a tuned VJ5301M868MXBEK kit.**

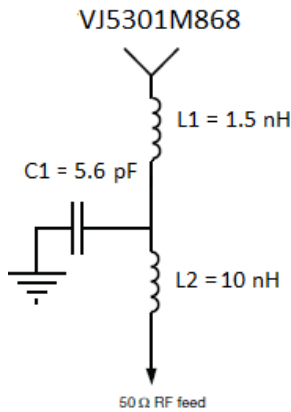


Figure 1 Tuning example with inductors  $L_1$ ,  $L_2$  and capacitor  $C_1$

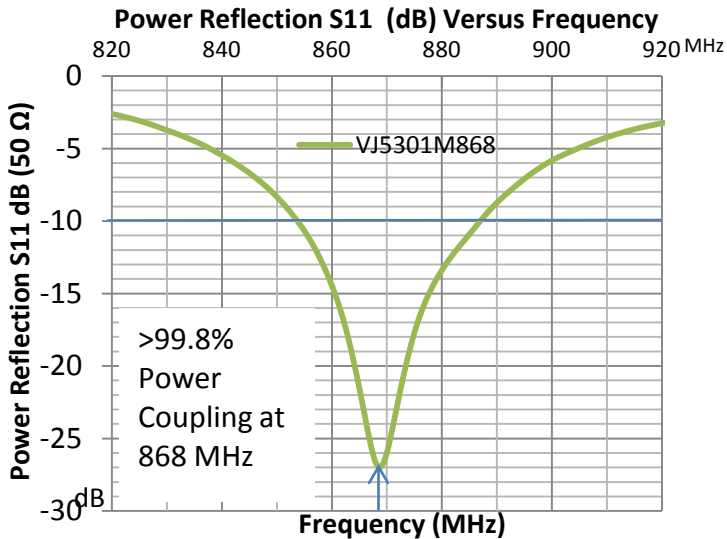


Figure 2 VJ5301M868 tuned to 868 MHz with > 99.8% power coupled

Rotation Plane	$\phi = 0^\circ$ Receiver Direction
XY	Y-axis
YZ	Z-axis

Figure 4 VJ5301M868MXBSR XY Radiation Pattern



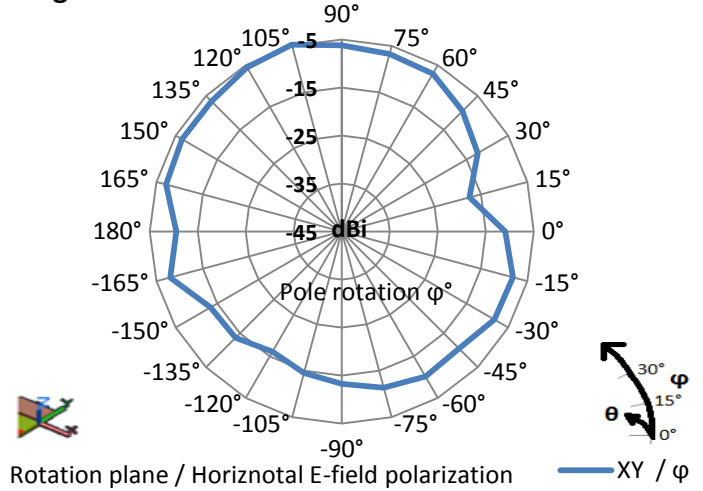


Figure 5 VJ5301M868MXBSR YZ Radiation Pattern

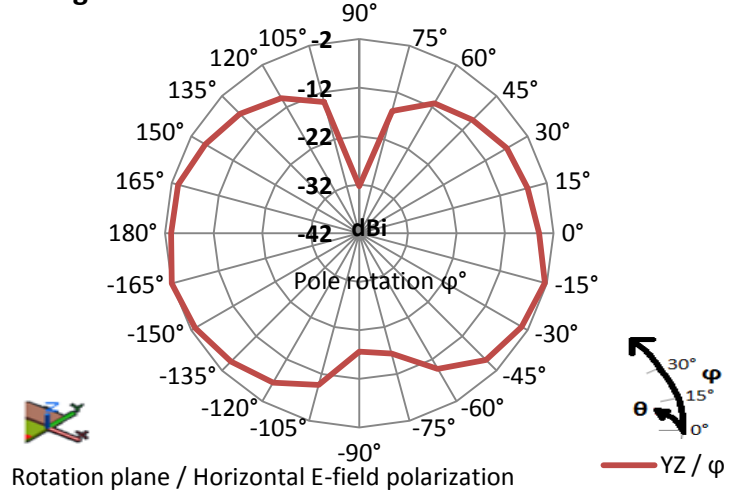




XZ	Z-axis
The radiation patterns reference the elevation $\theta$ that is perpendicular to the azimuth pole rotation in $\phi$ .	

Figure 3 VJ5301M868 PCB mounting and coordinate directions

Figure 6 VJ5301M868MXBSR XZ Radiation Pattern

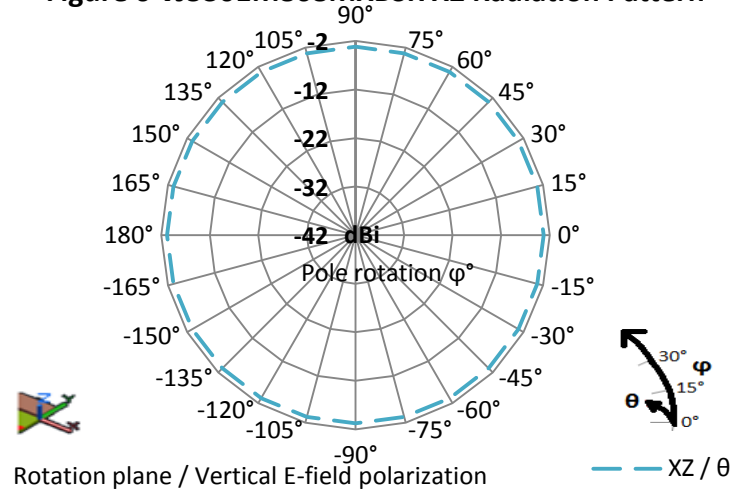

### FOOTPRINT, MECHANICAL AND PCB DIMENSIONS

The antenna footprint and mechanical dimensions are presented in Figure 7. Optimal tuning is adjusted according to PCB layout.

For additional mechanical support, it is recommended to add one drop of heat curing epoxy glue.

- The glue dot should not overlap with any of the soldering pads.
- Apply the glue dot at the center of the antenna.
- The glue dot area secures the chip firmly to the PCB.

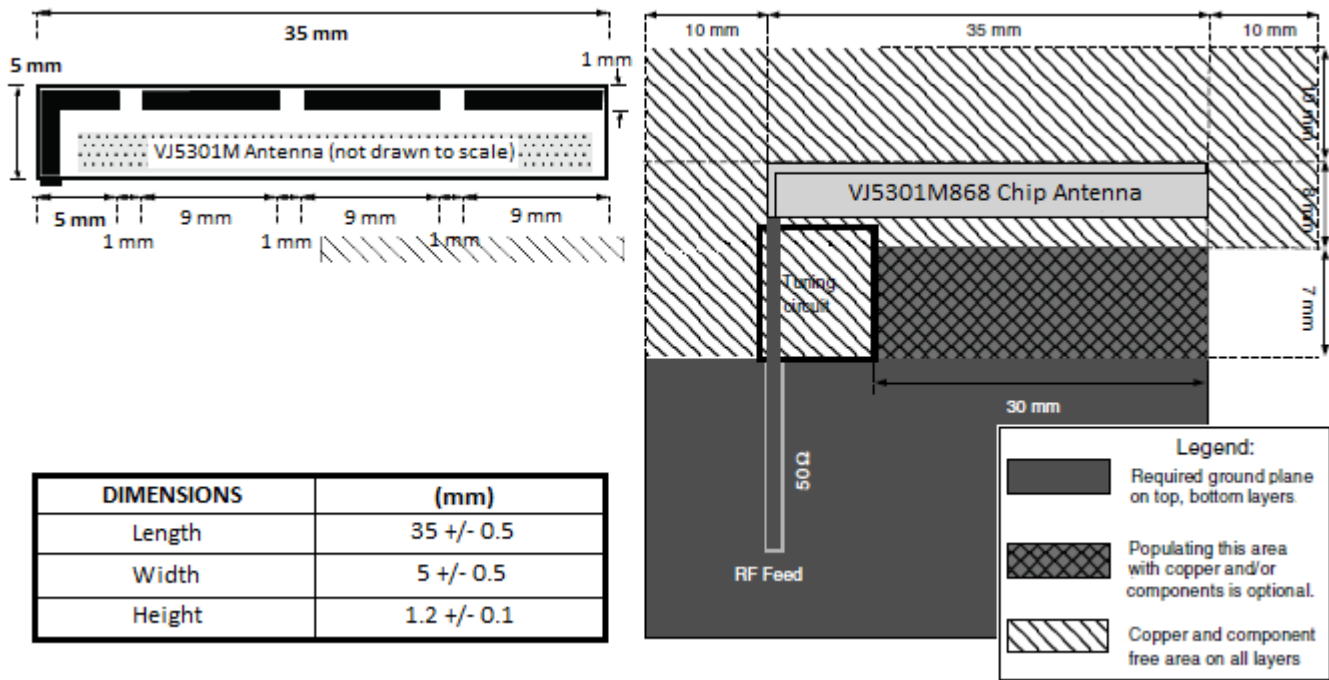


Figure 7 of VJ5301M868 footprint, chip antenna mechanical dimensions, and PCB layout dimensions

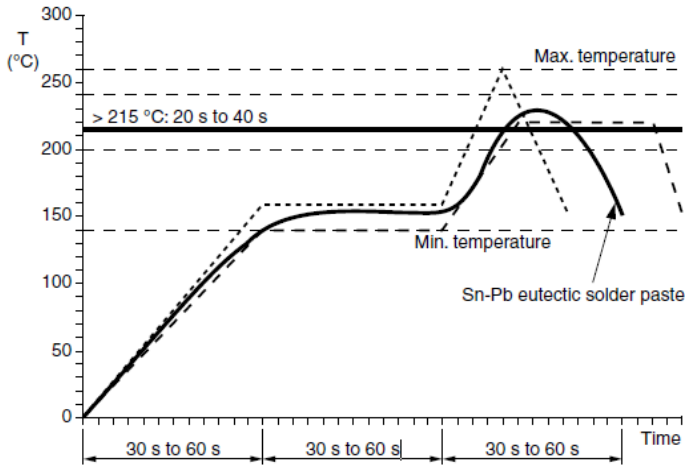


Figure 8 Soldering IR Reflow with SnPb Solder

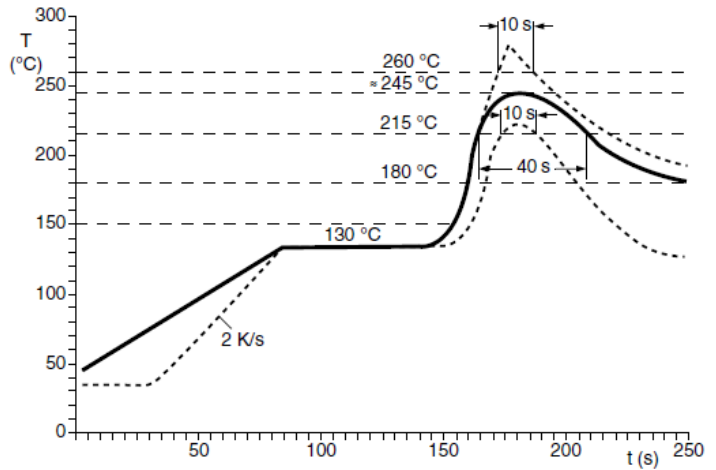


Figure 9 Soldering Reflow with Sn Solder

**VJ5301M868 ASSEMBLY GUIDELINES**

1. Mounting of antennas on a printed circuit board should be done by reflow soldering using the profiles shown (Figures 8, 9, and 10).
2. In order to provide the adequate strength between the antenna and the PCB apply of a dot of heat cured epoxy glue in the center of the footprint of the antenna prior to soldering the antenna to the board. An example for such glue is Heraeus PD 860002 SA. The weight of the dot should be 5 mg to 10 mg.

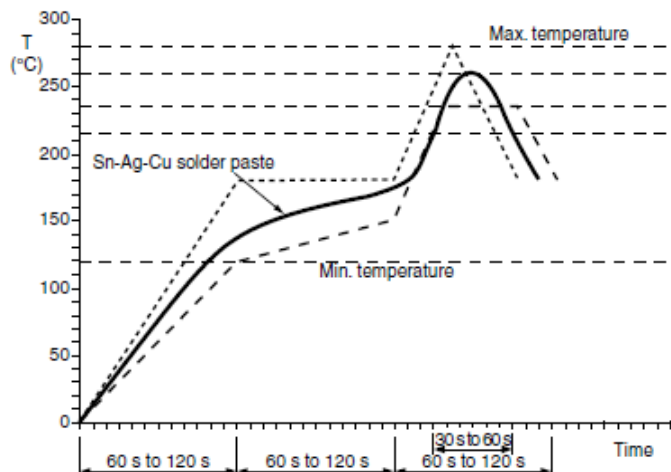


Figure 10 Soldering IR Reflow with SnAgCu Solder

ORDERING INFORMATION	VISHAY MATERIAL	PACKAGING QUANTITY
VJ5301M868 Chip Antenna	VJ5301M868MXBSR	1000 pieces
VJ5301M868 Evaluation Kit <sup>3</sup>	VJ5301M868MXBEK	1 kit

<sup>3</sup> The VJ5301M868 Kit is available for evaluation. For samples, please contact [mlcc-samples@vishay.com](mailto:mlcc-samples@vishay.com).



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death.

Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.