

# Type FSX

## Fast Acting Glass Tube Fuse

### Automotive Glass



www.optifuse.com (619) 593-5050

**Fuse Size:** 1/4" x 1" (6.3 x 25.4mm)

**Ampere Rating:** 250mA ~ 30A

**Voltage Rating:** 125V / 250V

**Electrical Characteristics:**


100%	135%	200%
Min.	Max.	Max.
4h	1h	120s

**Agency Standards and Listings:**



According to UL248-14

**Mechanical Dimensions: Inches[mm]**

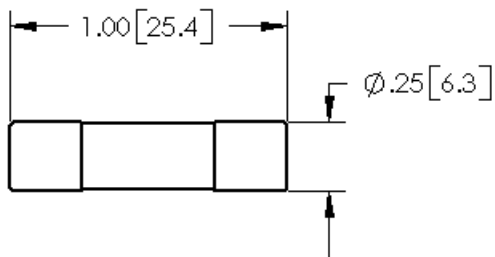

Part Number	Ampere Rating	Interrupt Rating	Voltage Rating	UL US	CSA US	PSE JET
FSX-250mA	250mA	10KA @125VAC 35A @250VAC	125V/250V	•		
FSX-500mA	500mA			•		
FSX-750mA	750mA			•		
FSX-1A	1A	•			•	
FSX-1.25A	1.25A	10KA @125VAC 100A @250VAC		•		•
FSX-1.5A	1.5A			•		•
FSX-2A	2A			•		•
FSX-2.5A	2.5A			•		•
FSX-3A	3A			•		•
FSX-4A	4A	10KA @125VAC 200A @250VAC		•		•
FSX-5A	5A		•		•	
FSX-6A	6A		•		•	
FSX-7A	7A		•		•	
FSX-8A	8A		•		•	
FSX-10A	10A	200A @125VAC 200A @250VAC			•	
FSX-12A	12A				•	
FSX-15A	15A				•	
FSX-20A	20A	100A @125VAC			•	
FSX-25A	25A				•	
FSX-30A	30A			125V		•

	<b>Warning:</b> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
	-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.