

Copper Mechanical Connectors

Join two cables end-to-end.

LOCKTITE® Two-Way Connectors


- Cables held by saddle and tightened by screws
- Built-in lockwashers
- For use with code copper conductor (600V)



CAT. NO.	CABLE SIZE	DIMENSIONS (IN.)		
		A	E	J
32503*	14 Sol. to 8 Sol.	1 $\frac{1}{8}$	$\frac{3}{8}$	1 $\frac{5}{32}$
32505*	8 Sol. to 4 Str.	1 $\frac{1}{8}$	$\frac{1}{2}$	1 $\frac{17}{32}$
32507	4 Sol. to 1 Str.	1 $\frac{1}{8}$	$\frac{5}{8}$	2 $\frac{27}{32}$
32509	1 Sol. to 2/0	1 $\frac{1}{8}$	$\frac{3}{4}$	1 $\frac{1}{32}$
32511	2/0 to 4/0	2 $\frac{1}{16}$	1 $\frac{5}{16}$	1 $\frac{1}{4}$
32513	4/0 to 300	2 $\frac{3}{16}$	1 $\frac{1}{8}$	1 $\frac{1}{2}$
32515	300 to 500	2 $\frac{3}{4}$	1 $\frac{1}{4}$	1 $\frac{29}{32}$
32517	500 to 750	3 $\frac{1}{8}$	1 $\frac{1}{2}$	2 $\frac{1}{16}$
32519	750 to 1,000	3 $\frac{3}{8}$	1 $\frac{11}{16}$	2 $\frac{9}{32}$

*With Filister Head Screw.


For torque requirements, see [page F-188](#).



Designed for easy, one-person installation.

LOCKTITE® Tee-Parallel Taps

- Tap hangs on main while branch is inserted
- Simply tighten screw to lock in place
- For use with code copper conductor (600V)

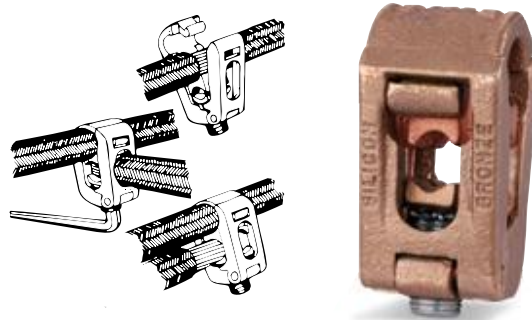

CAT. NO.	CABLE SIZE		DIMENSIONS (IN.)		
	MAIN	BRANCH	A	B	C
35011	300 to 500	2 to 3/0	2 $\frac{1}{2}$	1 $\frac{3}{4}$	1 $\frac{1}{4}$
35013	300 to 500	4/0 to 500	3 $\frac{1}{16}$	1 $\frac{7}{8}$	1 $\frac{5}{8}$
35015	500 to 750	2 to 3/0	2 $\frac{13}{16}$	1 $\frac{19}{16}$	1 $\frac{1}{4}$
35017	500 to 750	4/0 to 500	3 $\frac{3}{8}$	2 $\frac{1}{16}$	1 $\frac{5}{8}$
35019	500 to 750	500 to 750	4	2 $\frac{1}{16}$	2 $\frac{1}{16}$

For torque requirements, see [page F-188](#).

