

MW173KB

Universal 20-32 Watt Series



Medical / Switch Mode Power Supply

3 Year Warranty

- 100-240 VAC Universal Input
- Desktop and Wall Plug Style
- Single Output to 32W
- Seven Models Available; 5V to 24V
- Regulated Output with Low Ripple
- Impact Resistant Polycarbonate Enclosure
- Modified and Custom Designs
- No Load Power Consumption < 0.50W
- Designed to Meet EISA Requirements — see reverse side for details



International Safety Standard Approvals



Specifications

Output Specifications

Line and Load Regulation (Excluding cord)	Line Voltage +/-1% Load Voltage +/-5%
Ripple	1% Vp-p max.
Transient Response	0.5ms for 50% Load change Typical
Protection	Over-current Protection (Hiccup) Short Circuit Protection

Input Specifications

Input Voltage Range	Universal input	100-240VAC -10%, +10%
Line Frequency		47-63Hz
Input Current	90VAC Input	1.0A max.
Protection		Dual Internal Primary Current Fuse, Inrush Limiting

Environmental Specifications

Thermal Performance	Operating temperature full load, no derating convectional cooling Non vented case	0° C to 40° C
Relative Humidity	Non-condensing	5% to 95%
Altitude		0-10,000 feet

General Specifications

Topology	Switching-Fixed Frequency Flyback
Efficiency	Designed to Meet EISA Requirements — see reverse side
Hold-up Time	@115VAC 18ms min.
Dielectric Withstand	4,000VAC, 5,656VDC Primary-Secondary
Storage Temp	-30° C to 85° C
Approvals and Safety Standards	UL60601-1, IEC/EN60601-1 EMC : EN60601-1-2/EN55024
MTBF	100,000 Calculated Hours
Case and Dimension	Desktop Style 3.74L x 2.13W x 1.26H (in) 95.0L x 54.0W x 32.0H (mm)
Case Material	Black 94V0 Polycarbonate
Cord and Connectors	18 AWG 1,800mm 2 Conductor. (5V Model: 1,500mm). Ault #3 Connector. Other connectors are also available.

MW173KB







Universal 20-32 Watt Series

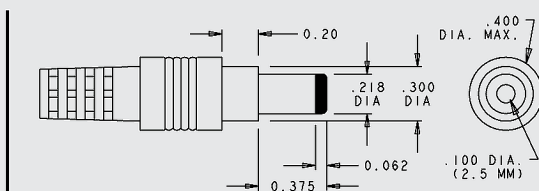
Medical / Switch Mode Power Supply

For the most current data and application support visit www.slpower.com

Ault Part Number	Output Voltage	Output Current Max	Max Watts	Ripple Vp-p max.
MW173KB05XX	5 V	4.00 A	20.0 W	50 mV
MW173KB07XX	7.5 V	3.00 A	22.5 W	75 mV
MW173KB09XX	9 V	3.00 A	27.0 W	90 mV
MW173KB12XX	12 V	2.50 A	30.0 W	120 mV
MW173KB15XX	15 V	2.00 A	30.0 W	150 mV
MW173KB18XX	18 V	1.67 A	30.1 W	180 mV
MW173KB24XX	24 V	1.33 A	31.9 W	240 mV

Ault Part Number Key				
MW173	K	B	03	XX
Product Family Name	Manufacturing Location	Design Revision Changes	Voltage DC	Connector Number

Input Configuration					
					
IEC320 w/ground C14 (F)	IEC320 w/o ground C18 (Q)	Shaver C8 (N)	N. America/ Japan (B)	Europe (M)	United Kingdom (G)
Specify the Input Configuration Code in your order.					

Pin Connections	
3	
	Pinout Code: Center contact: positive
	Description: Switchcraft 760 plug or equivalent
	Suggested Mating: Switchcraft 712A jack or equivalent
Other Connectors are available by special order	

2007 Energy Independence and Security Act – EISA									
<p>The Energy Independence and Security Act of 2007 was passed in December of 2007 and addresses minimum efficiency standards and standby levels for Class A external power supplies that are 250 watts and under. This law stipulates that external power supplies manufactured on July 1, 2008 and beyond meet certain minimum efficiency and standby criteria as defined below.</p>									
<p>Minimum Efficiency Criteria Active mode is defined as when a power supply's input is connected to line voltage AC and its output is connected to a DC or AC load drawing a portion of the product's power output. Depending on the power rating for the power supply, it must meet the minimum efficiency criteria outlined below.</p>									
<p>Energy-Efficiency Criteria for Active Mode:</p> <table border="0"> <tr> <td>output power on adapter label</td> <td>minimum average efficiency percentage</td> </tr> <tr> <td>0 to ≤ less than 1 watt</td> <td>≥ 0.50 * output power on adapter label</td> </tr> <tr> <td>> 1 to ≤ 51 watts</td> <td>≥ [0.09 * Ln (output power on adapter label)] + 0.50</td> </tr> <tr> <td>> 51 watts</td> <td>≥ 0.85</td> </tr> </table>		output power on adapter label	minimum average efficiency percentage	0 to ≤ less than 1 watt	≥ 0.50 * output power on adapter label	> 1 to ≤ 51 watts	≥ [0.09 * Ln (output power on adapter label)] + 0.50	> 51 watts	≥ 0.85
output power on adapter label	minimum average efficiency percentage								
0 to ≤ less than 1 watt	≥ 0.50 * output power on adapter label								
> 1 to ≤ 51 watts	≥ [0.09 * Ln (output power on adapter label)] + 0.50								
> 51 watts	≥ 0.85								
<p>The power supply must also meet a requirement for when its input is connected to a line voltage AC but its output is not connected to a load. Depending on the power output of the supply, it must keep its energy consumption below the following values.</p>									
<p>Energy Consumption Criteria for No Load Mode:</p> <table border="0"> <tr> <td>output power on adapter label</td> <td>maximum power consumption in no-load mode</td> </tr> <tr> <td>0 to < 250 watts</td> <td>≤ 0.5 watts</td> </tr> </table>		output power on adapter label	maximum power consumption in no-load mode	0 to < 250 watts	≤ 0.5 watts				
output power on adapter label	maximum power consumption in no-load mode								
0 to < 250 watts	≤ 0.5 watts								