


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	125 V
OUTER JACKET MATERIAL/COLOR	TPE/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x24 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



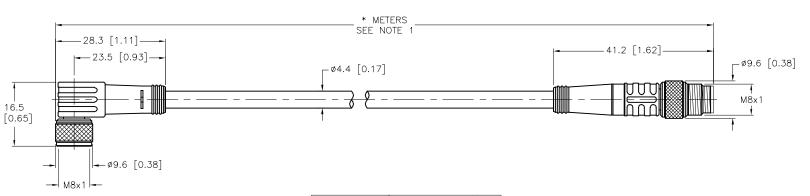

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE

3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE MINNEAPOLIS, MN 55441 PROPERTY OF TURCK INC. USE OF THIS 1-800-544-7769 2. (763) 553-7300 DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 3. NOTES: (763) 553-0708 fax www.turck.us 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER MATERIAL DATE 03/16/07 RWC SPECIFIC LENGTHS. PKW 3M-*-PSG 3M/S1587 SCALE 1=1.0 ALL DIMENSIONS APVD SEE SPECIFICATIONS DISPLAYED ON THIS DRAWING ARE FOR 2. "/S1587" DESIGNATES WELDLIFE CABLE. UNIT OF MEASUREMENT REFERENCE ONLY IDENTIFICATION NO. REV FINISH CONTACT TURCK FOR MORE INFORMATION MILLIMETER [INCH] UPDATE MALE COUPLING NUT PER ECO 05/09/13 40191 SEE SPECIFICATIONS DESCRIPTION FILE: 777016270 SHEET 1 OF 1 DATE ECO NO. DO NOT SCALE THIS DRAWING

RELATED DOCUMENTS