


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	2.0 A			
RATED VOLTAGE [V]	125 VAC/VDC			
OUTER JACKET MATERIAL/COLOR	TPU/BLACK			
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER			
NUMBER OF CONDUCTORS [AWG]	4x26 AWG			
TEMPERATURE RATING	-40°C TO +90°C (-40°F TO +194°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

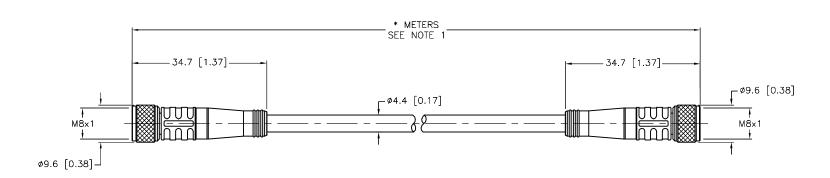

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNILESS OTHERWISE SPECIFIED				

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S90" INDICATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
- 3. "/S101" INDICATES FLEXLIFE-20 AND C-TRACK CABLE.

G	UPDATE SOURCE DRAWING-ADD CTRACK TO /S101 NOTE	СВМ	02/18/14	44634
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
1. 2. 3. 4.	⊕ □		
MATERIAL		DRFT RDS	
	ALL DIMENSIONS DISPLAYED ON THIS	APVD	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	
FINISH	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

DATE 01/05/09 DESCRIPTION RDS PKG 4M-*-PKG 4M/S90/S101 SCALE 1=1.0 APVD

UNIT OF MEASUREMENT IDENTIFICATION NO. REV MILLIMETER [INCH] DO NOT SCALE THIS DRAWING FILE: 777023633 SHEET 1 OF 1