


SPE	SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	125 VAC/VDC	
OUTER JACKET MATERIAL/COLOR	PVC/GRAY	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	4x22 AWG	
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	

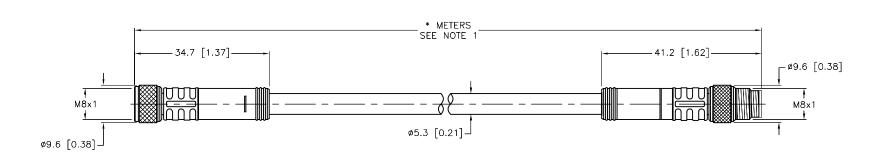

CABLE LENGTH	TOLERANCE *		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE *		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		
* UNILESS OTHERWISE SPECIFIED			

SOURCE DRAWING - FOR REFERENCE ONLY

Turck iac

High Technology Sensors and Automation Controls

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

REV

Α

SHEET 1 OF 1

PKGC 4M-*-PSGC 4M

3000 CAMPUS DRIVE

MATERIAL		DRF
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APV[

REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

3RD ANGLE

PROJECTION

MILLIMETER [INCH]

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

RDS

UNIT OF MEASUREMENT IDENTIFICATION NO.

DATE 02/09/15

SCALE 1=1.0

DRAWING RELEASE RDS 02/09/15

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER

NOTES:

SPECIFIC LENGTHS.

FILE: 777034693 DO NOT SCALE THIS DRAWING

REV DESCRIPTION DATE ECO NO.

FINISH SEE SPECIFICATIONS

2.

3.

RELATED DOCUMENTS