
FEMALE END VIEW
1 3
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK
O pico rast.

SPECI	FICATIONS		
CONTACT CARRIER MATERIAL	NYLON OR TPU		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	2.0 A		
RATED VOLTAGE [V]	125 VAC/VDC		
OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	4x26 AWG		
DRAIN/SHIELD	26 AWG/ALUMINUM-POLYESTER FOIL		
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68		

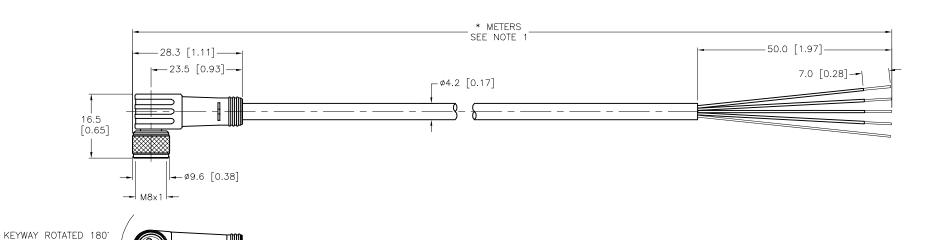

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

FROM STANDARD (SEE NOTE 4)

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S90 DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
- 3. "/S618" DESIGNATES CABLE WITH POLYESTER SHIELD AND DRAIN WIRE. DRAÍN IS NOT CONNECTED AT THE MOLDED END.
- 4. "/S1526 DESIGNATES KEYWAY ROTATED 180"

В	UPDATE CABLE DIAMETER	KMY	10/19/11	36135
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE	
1. 2. 3. 4.	\rightarrow	PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
MATERIAL		DRFT CK	DATE 07
	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREME
FINISH	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INC

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

SHEET 1 OF 1

7/21/1 PKW 4M-*/S90/S618/S1526 1 = 1.0

FILE: 777027913

IENT

ICH] DO NOT SCALE THIS DRAWING

IDENTIFICATION NO. REV