

Cooper Bussmann

[Homepage](#)
[About Cooper Bussmann](#)
[Contact Us](#)
[Privacy](#)
[Legal](#)
[Cooper Bussmann® Brand](#)
[Site Map](#)



FNM-6

Time-Delay Supplementary Fuses, 13/32 x 1-1/2 Inches

Product Information	
Product Type:	Fuse
Product Family:	Electrical Power
Upgrade Product:	LP-CC-6
Brand:	Cooper Bussmann
Sub-brand:	Fusetron

Recommended Products	
Rec. Fuse Block:	BM603 Series
Rec. Inline Fuse Holder:	HPS
Rec. Panel-mount Fuse Holder:	HEB Series
Rec. Modular Fuse Holder:	OPM-NG-SM3
Rec. Fuse Clips:	5960 Series
Rec. Cover:	SAMI-7 Series

Physical Properties	
Dimensions:	1.5in.(L) × 0.41in.(W) × 0in.(H)


Certifications	
UL Listed	
CSA Certified	

Electrical Properties	
Maximum AC Voltage:	250
Amperage Rating:	6
AC Interrupting Ratings:	<ul style="list-style-type: none"> • 10000 at 125V • 200 at 250V
Time Delay:	Yes


Time-Delay Ferrule Fuse

FNM

13/32" x 1-1/2"

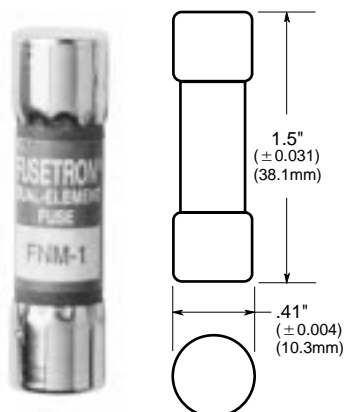

- Fibre tube.
- For circuits with high inrush currents.
- Formerly designated 5AB.
- Fusetron® Dual-Element fuse.



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

Catalog Symbol: FNM

TIME-DELAY

1/10 TO 30A

Interrupting Rating - SEE CHART BELOW

UL Listed: STD. 248-14, 0-10/250Vac; 12-15/125Vac

FILE #E19180, GUIDE #JDYX

CSA Certified: 1-10/250Vac; CLASS 1422-01,

12-15/125Vac; FILE 53787

Electrical Ratings (Catalog Symbol and Amperes)

250Vac IR	250Vac IR	250Vac IR	125Vac
FNM-1/10	FNM-1-1/8	FNM-4	FNM-12 10,000
FNM-1/8	FNM-1-1/4	FNM-4-1/2	FNM-15 @ 125Vac
FNM-15/100	FNM-1-4/10	FNM-5	-
FNM-2/10	FNM-1-1/2	FNM-5-6/10	-
FNM-1/4 35A @	FNM-1-6/10 100A @	FNM-6	32Vac
FNM-3/10 250Vac	FNM-1-8/10 250Vac	FNM-6-1/4 200A @	FNM-20 250Vac
FNM-4/10 10,000	FNM-2 10,000	FNM-7 10,000 @	FNM-25 125Vac
FNM-1/2 @	FNM-2-1/4 @	FNM-8 @	FNM-30
FNM-6/10 125Vac	FNM-2-1/2 125Vac	FNM-9	-
FNM-3/4	FNM-2-8/10	FNM-10	-
FNM-8/10	FNM-3	-	-
FNM-1	FNM-3-2/10	-	-
-	FNM-3-1/2	-	-

If 250Vac is needed for 12-30A, use FNW series.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight	
		Lbs.	Kg.
0-30	10	.125	.057

CE