



SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	2.0 A			
RATED VOLTAGE [V]	125 VAC/VDC			
OUTER JACKET MATERIAL/COLOR	PVC/BLACK			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS (AWG)	4X26 AWG			
TEMPERATURE RANGE	-40° C to $+105^{\circ}$ C (-40° F to $+221^{\circ}$ F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

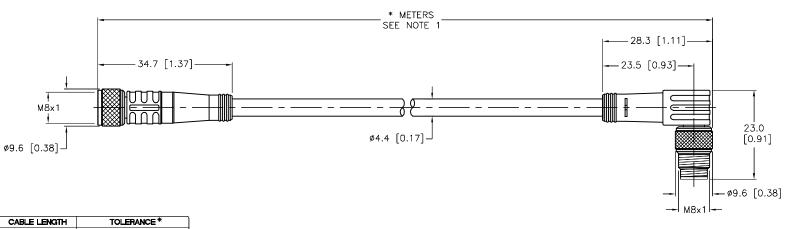

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					



SOURCE DRAWING - FOR REFERENCE ONLY

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S760" DESIGNATES BLACK CABLE JACKET.

NOTES:

3. "/S771" DESIGNATES BLACK MOLDED PLUG BODIES.

Α	DRAWING RELEASE	TR	03/11/14	
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE		
1. 2. 3. 4.		PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		Sensors and Automation Controls
MATERIAL		DRFT RDS	DATE 03/04/14	DESCRIPTION PKG 4M-*-PSW
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD L.H.	SCALE 1=1.0	PNG 4M-1-P3W
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.
FINISH	CONTACT TURCK		IDENTIFICATION NO.	
SEE SPECIFICATIONS	FOR MORE INFORMATION			

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

SHEET 1 OF 1

G 4M-*-PSW 4M/S760/S771

ATION NO. REV

FILE: 777033024