


	SPECIFICATIONS				
	CONTACT CARRIER MATERIAL	NYLON OR TPU			
	CONTACT MATERIAL/PLATING	BRASS/GOLD			
	RATED CURRENT [A]	4.0 A			
	RATED VOLTAGE [V]	250 V			
	HOUSING MATERIAL/PLATING	BRASS/NICKEL			
	NUMBER OF CONDUCTORS [AWG]	PCB PINS			
	TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)			
	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			
	MAX BOARD THICKNESS	2mm			

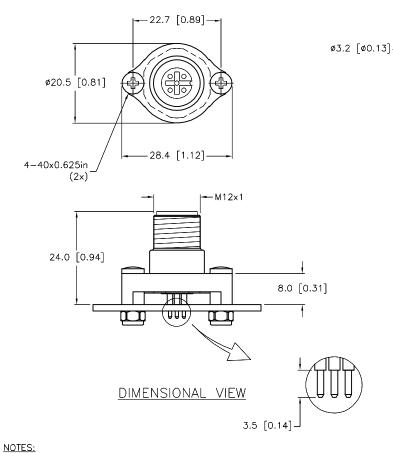


1. "C1101" DESIGNATES KEYWAY FOR CUSTOMER SPECIFIC.


D ADD SPECS & UPDATE SCREW LENGTH

REV DESCRIPTION

2. FOR OTHER RIGHT ANGLE CONNECTORS, ROTATE BOARD LAYOUT TO DESIRED ORIENTATION OR ROTATE 5-HOLE PINOUT IN INCREMENTS OF 60°.

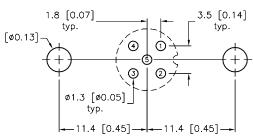

BOARD LAYOUT SCALE 2=1



RIGHT ANGLE CONNECTOR ORIENTATION

SOURCE DRAWING - FOR REFERENCE ONLY

_	A 9 6		RELATED DOCUMENTS 1. INSERT SHEET 10240199 2. 3.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	MINNEAPO 1-800 (763) (763)	AMPUS DRIVE DLIS, MN 55441 0-544-7769 553-7300 553-0708 fax
_AYOUT TO MENTS OF 60°.			MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	DRFT DF	DATE 08/01/00 SCALE 1=1.0	DESCRIPTION FS 57	-PCB KIT/100/	w.turck.us C1101
		0°.	FINISH SEE SPECIFICATIONS	REFERENCE ONLY CONTACT TURCK FOR MORE	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	U7340-11	REV
	08/01/19 DATE	500000000281 ECO NO.		INFORMATION	DO NOT SCALE	THIS DRAWING	FILE: U7340-11		SHEET 1 OF 1