


# 3M™ ROUND CONDUCTOR FLAT CABLE, 3801 SERIES

.050" 26 AWG STRANDED, PVC

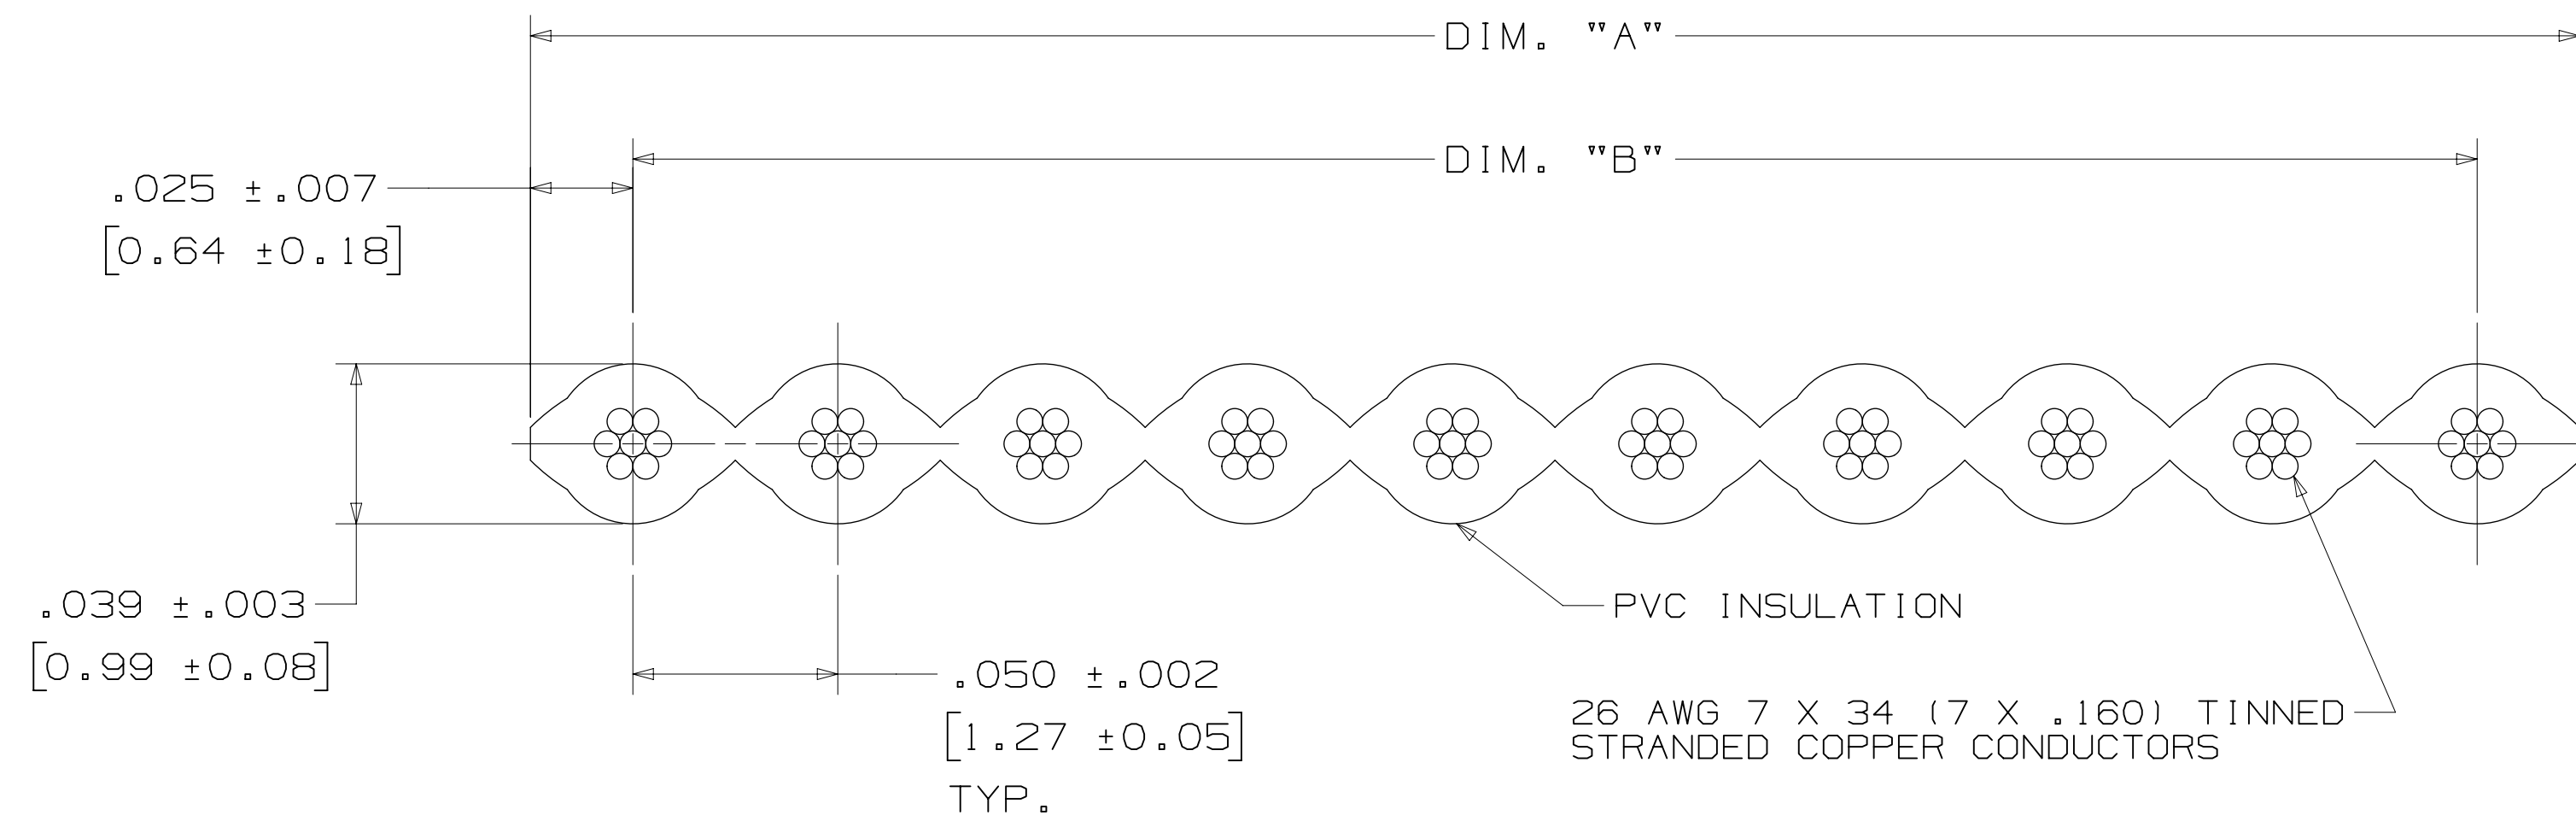

NUMBER OF CONDUCTORS	3M PART NUMBER	DIMENSION "A"	DIMENSION "B"
04	3801/04	.200±.010 [ 5.08 ]	.150±.007 [ 3.18 ]
05	3801/05	.250±.010 [ 6.35 ]	.200±.007 [ 5.08 ]
06	3801/06	.300±.010 [ 7.62 ]	.250±.007 [ 6.35 ]
07	3801/07	.350±.010 [ 8.89 ]	.300±.007 [ 7.62 ]
08	3801/08	.400±.010 [ 10.16 ]	.350±.007 [ 8.89 ]
09	3801/09	.450±.010 [ 11.43 ]	.400±.007 [ 10.16 ]
10	3801/10	.500±.010 [ 12.70 ]	.450±.007 [ 11.43 ]
12	3801/12	.600±.010 [ 15.24 ]	.550±.007 [ 13.97 ]
14	3801/14	.700±.010 [ 17.78 ]	.650±.007 [ 16.51 ]
15	3801/15	.750±.010 [ 19.05 ]	.700±.007 [ 17.78 ]
16	3801/16	.800±.015 [ 20.32 ]	.750±.011 [ 19.05 ]
18	3801/18	.900±.015 [ 22.86 ]	.850±.011 [ 21.59 ]
20	3801/20	1.000±.015 [ 25.40 ]	.950±.011 [ 24.13 ]
24	3801/24	1.200±.015 [ 30.48 ]	1.150±.011 [ 29.21 ]
25	3801/25	1.250±.015 [ 31.75 ]	1.200±.011 [ 30.48 ]
26	3801/26	1.300±.015 [ 33.02 ]	1.250±.011 [ 31.75 ]
30	3801/30	1.500±.020 [ 38.10 ]	1.450±.015 [ 36.83 ]
34	3801/34	1.700±.020 [ 43.18 ]	1.650±.015 [ 41.91 ]
36	3801/36	1.800±.020 [ 45.72 ]	1.750±.015 [ 44.45 ]
37	3801/37	1.850±.020 [ 46.99 ]	1.800±.015 [ 45.72 ]
40	3801/40	2.000±.020 [ 50.80 ]	1.950±.015 [ 49.53 ]
44	3801/44	2.200±.020 [ 55.88 ]	2.150±.015 [ 54.61 ]
50	3801/50	2.500±.020 [ 63.50 ]	2.450±.015 [ 62.23 ]
60	3801/60	3.000±.020 [ 76.20 ]	2.950±.015 [ 74.93 ]
64	3801/64	3.200±.020 [ 81.28 ]	3.150±.015 [ 80.07 ]

NOTES

1. REGULATORY INFORMATION: VISIT 3M.com/regs OR CONTACT YOUR 3M REPRESENTATIVE TO FIND THE RoHS COMPLIANCE STATUS OF THE 3M PART YOU ARE INTERESTED IN.  
UL FILE: E42769  
STYLE: 2651

2. IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENT.

2 PHYSICAL :

INSULATION: POLYVINYL CHLORIDE (PVC)  
MATERIAL: POLYVINYL CHLORIDE (PVC)  
COLOR: SEE ORDERING INFORMATION  
MARKING: NONE  
STANDARD: NONE  
CANADIAN: SEE "PRINTING ILLUSTRATION" VIEW

CONDUCTORS: 26 AWG 7 X 34 [ 7 X .160 ] TINNED STRANDED COPPER

2 ELECTRICAL :

VOLTAGE RATING: USA 300V CANADIAN 300V EU: <50V  
INSULATION RESISTANCE: >1 X 10<sup>9</sup>Ω/10ft. [ 3m ]

UNBALANCED  
CHARACTERISTIC IMPEDANCE: 89Ω  
CAPACITANCE: 16.2 pF/ft [ 53.1 pF/m ]  
INDUCTANCE: .13μH/ft [ .43μH/m ]  
PROPAGATION DELAY: 1.44 ns/ft [ 4.72 ns/m ]  
VELOCITY OF PROPAGATION: 71%

NOTE: UNBALANCED IS MEASURED BETWEEN GROUND-SIGNAL-GROUND CONDUCTORS.

2 ENVIRONMENTAL :

TEMPERATURE RATING: -20°C TO 105°C  
FLAMMABILITY RATING: USA: VW-1 CANADA: FT1

## ORDERING INFORMATION

X3801X / XX XX

BLANK = STANDARD  
C = CANADIAN CERTIFIED VERSION

BLANK = STANDARD  
SF = SPLICE FREE

No. OF CONDUCTORS: (SEE TABLE 1)

COLOR OPTIONS:  
BLANK = GRAY (STANDARD PRODUCT)  
A = BLACK (SPECIAL PRODUCT)

NOTE:  
AVAILABLE IN STANDARD 100FT OR 300FT ROLLS.  
PLEASE SPECIFY WHEN ORDERING.  
CONTACT 3M FOR AVAILABILITY OF ADDITIONAL CONDUCTOR COUNTS AND/OR CUSTOM ROLL LENGTHS.

CANADIAN OPTION  
"PRINTING ILLUSTRATION"

**RU** AWM 2651 105C 300V VW1 3M NU  
**cRU** AWM 1A 105C 300V FT1 EU <50V

3M ELECTRONICS MATERIALS SOLUTIONS DIVISION  
INTERCONNECT SOLUTIONS  
http://www.3Mconnectors.com

3M IS A TRADEMARK OF 3M COMPANY.  
FOR TECHNICAL, SALES OR ORDERING INFORMATION CALL 800-225-5373

INCH [ MM ]		
TOLERANCE - UNLESS NOTED		
.X	.XX	.XXX
[ INCH ] ±.1	±.01	±.005
[ ] = DIM. FOR REFERENCE ONLY		

REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
D	0104000	MAY 04, 2022 ADDED 12 CONDUCTOR TO TABLE 1	LDS	FJR
C	73862	MAY 10, 2017 REVISED AND REDRAWN	JNC	RDE

DESIGN REFERENCE	NEXT ASSEMBLY	DIVISION CODE	EMSD
DO NOT SCALE DRAWING	SCALE 25/1	TOLERANCES EXCEPT AS NOTED	
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2018	MILLIMETERS	
MAX SURFACE ROUGHNESS	DT SURFACES	INCHES	
MARKED ONLY			

3M  
© 3M COPYR [GHT] 2022  
This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.

TITLE: ROUND CONDUCTOR FLAT CABLE, .050", 26 AWG STRANDED, PVC

CAGE NUMBER: D78-5100-0063-7  
DRAWING NO.: 3801  
REV. 1 OF 2

Imaged: Central Standard Time 5/4/2022 11:54:00 AM UTC Offset (hrs): 6  
DRAWING NUMBER: 78-5100-0063-7  
REVISION: 1

# 3M™ ROUND CONDUCTOR FLAT CABLE, 3801 SERIES

.050" 26 AWG STRANDED, PVC

**Regulatory:** For regulatory information about this product, visit [3M.com/regs](http://3M.com/regs) or contact your 3M representative.


**Technical Information:** The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

**Product Use:** Many factors beyond 3M's control and uniquely within user's control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

**Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OR TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M Electronics Materials Solutions Division  
 13011 McCallen Pass, Bldg. C  
 Austin, TX 78753-5380  
 1-800-225-5373  
[www.3M.com/interconnect](http://www.3M.com/interconnect)

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DO NOT SCALE DRAWING	SCALE 1/1	TOLERANCES EXCEPT AS NOTED		 © 3M COPYRIGHT 2022 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2018	MILLIMETERS		TITLE <b>ROUND CONDUCTOR FLAT CABLE, .050", 26 AWG STRANDED, PVC</b>		
MAX SURFACE ROUGHNESS	MARKED ONLY	INCHES		CAGE NUMBER <b>D78-5100-0063-7</b>		
		MILLIMETERS		DRAWING NO. <b>D78-5100-0063-7</b>		
		INCHES		MODEL <b>3801</b>		
				REV. 1 DATE: MAY 04, 2022 ADD'D 12 CONDUCTOR TO TABLE 1 DRFT: LDS CHKD: FJR		
				REV. 2 DATE: MAY 10, 2017 REVISED AND REDRAWN DRFT: JNC CHKD: RDE		
				REV. 3 DATE: MAY 10, 2017 REVISED AND REDRAWN DRFT: R. EDWARDS CHKD: MAY 10, 2017		

78-5100-0063-7  
 DRAWING NUMBER  
 Time 5/4/2022 5:44:00 UTC Offset (hrs) 6