# SIEMENS

# **Product data sheet**

## 3RT1025-1AK60



CONTACTOR, AC-3 7,5 KW/400 V, AC 110V 50HZ/120V 60HZ, 3-POLE, SIZE S0, SCREW CONNECTION

| General details:  |    |                 |
|---|----|-----------------|
| product brand name  |    | SIRIUS          |
| product designation   | _  | power contactor |
| Size of the contactor   |    | S0              |
| Protection class IP / on the front  |    | IP20            |
| Degree of pollution   |    | 3               |
| Installation altitude / at a height over sea level / maximum  | m  | 2,000           |
| Ambient temperature / during operating  | °C | -25 +60         |
| Active power loss / per conductor / typical   | W  | 0.9             |
| Item designation  |    |                 |
| according to DIN EN 61346-2   |    | Q               |
| <ul> <li>according to DIN 40719 extendable after IEC 204-2 / according<br/>to IEC 750</li> </ul>            |    | К               |
| Mechanical operating cycles as operating time   | _  |                 |
| • of the contactor / typical  |    | 10,000,000      |
| <ul> <li>of the contactor with added auxiliary switch block / typical</li> </ul>                            |    | 10,000,000      |
| <ul> <li>of the contactor with added electronics-compatible auxiliary<br/>switch block / typical</li> </ul> |    | 5,000,000       |
| Main circuit:   |    |                 |
| Number of poles / for main current circuit  |    | 3               |

| Number of NC contacts / for main contacts  |    | 0   |  |
|--|----|-----|--|
| Number of NO contacts / for main contacts  |    | 3   |  |
| Operating current / at AC-1 / at 400 V / at 40 °C ambient<br>temperature / rated value | А  | 40  |  |
| Operating current / at AC-1 / at 400 V / at 60 °C ambient<br>temperature / rated value | A  | 35  |  |
| Operating current  |    |     |  |
| • at AC-3 / at 400 V / rated value   | А  | 17  |  |
| with 1 current path  |    |     |  |
| • at DC-1  |    |     |  |
| • at 24 V / rated value  | А  | 35  |  |
| • at 110 V / rated value   | А  | 4.5 |  |
| • at DC-3 / at DC-5  |    |     |  |
| • at 24 V / rated value  | А  | 20  |  |
| • at 110 V / rated value   | А  | 2.5 |  |
| with 2 current paths in series   |    |     |  |
| • at DC-1  |    |     |  |
| • at 24 V / rated value  | А  | 35  |  |
| • at 110 V / rated value   | А  | 35  |  |
| • at DC-3 / at DC-5  |    |     |  |
| • at 24 V / rated value  | А  | 35  |  |
| • at 110 V / rated value   | А  | 15  |  |
| with 3 current paths in series   |    |     |  |
| • at DC-1  |    |     |  |
| • at 24 V / rated value  | А  | 35  |  |
| • at 110 V / rated value   | А  | 35  |  |
| • at DC-3 / at DC-5  |    |     |  |
| • at 24 V / rated value  | А  | 35  |  |
| • at 110 V / rated value   | А  | 35  |  |
| Service power  |    |     |  |
| • at AC-1 / at 400 V / rated value   | kW | 23  |  |
| • at AC-2 / at 400 V / rated value   | kW | 7.5 |  |
| • at AC-3  |    |     |  |
| • at 400 V / rated value   | kW | 7.5 |  |
| • at 500 V / rated value   | kW | 10  |  |
| • at 690 V / rated value   | kW | 11  |  |

| Control circuit:                                   |  |              |  |
|--|--|--------------|--|
| Design of activation                               |  | conventional |  |
| Type of voltage / of the controlled supply voltage |  | AC           |  |
| Control supply voltage frequency                   |  |              |  |

| • 1 / rated value          | Hz | 50  |
|----------------------------|----|-----|
| • 2 / rated value          | Hz | 60  |
| Control supply voltage / 1 |    |     |
| • at 50 Hz / for AC        |    |     |
| rated value                | V  | 110 |
| • at 60 Hz / for AC        |    |     |
| rated value                | V  | 120 |

## Auxiliary circuit:

|   | 1 faulty switching per 100 million (17 V, 1 mA) |
|---|---|
|   |   |
|   | 0   |
|   | 0   |
|   |   |
|   | 0   |
|   | 0   |
|   |   |
| А | 10  |
|   |   |
| А | 6   |
| А | 3   |
|   |   |
| А | 6   |
| А | 3   |
| А | 1   |
|   |   |
| А | 10  |
| А | 2   |
| А | 1   |
| А | 0.3   |
|   | A<br>A<br>A<br>A<br>A<br>A<br>A                 |

# Short-circuit: Design of the fuse link fuse gL/gG: 10 A • for short-circuit protection of the auxiliary switch / required fuse gL/gG: 10 A • for short-circuit protection of the main circuit fuse gL/gG: 63 A • with type of assignment 1 / required fuse gL/gG: 63 A • at type of coordination 2 / required fuse gL/gG: 25 A Installation/mounting/dimensions: Type of mounting screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

| series installation                       |                            |                  |         | Yes                  |   |
|---|----------------------------|------------------|---------|----------------------|---|
| Width                                     |                            |                  | mm      | 45                   |   |
| Height                                    |                            |                  | mm      | 85                   |   |
| Depth                                     |                            |                  | mm      | 91                   |   |
| Distance, to be mainta                    | ined, to earthed p         | art / sidewards  | mm      | 6                    |   |
| Connection type:                          |                            |                  |         |                      |   |
| Design of the electrica                   | al connection              |                  |         |                      |   |
| <ul> <li>for main current circ</li> </ul> | cuit                       |                  |         | screw-type terminals |   |
| <ul> <li>for auxiliary and cor</li> </ul> | ntrol current circuit      |                  |         | screw-type terminals |   |
| Certificates/approva                      | als:                       |                  |         |                      |   |
| General Product App                       | proval                     |                  |         |                      | Functional Safety /<br>Safety of<br>Machinery |
| coc                                       | (SA)                       | <u>KETI</u>      | ROSTEST |                      | SUVA  |
| Test Certificates                         |                            |                  |         |                      |   |
| Manufacturer                              |                            |                  |         |                      |   |
| Shipping Approval                         |                            |                  |         |                      |   |
| ABS                                       | B U R E A U<br>V E R I TAS | ĴÅ<br>DNV<br>DNV | GL      | Lloyd's<br>Register  | RINA  |
| Shipping Approval                         | other                      |                  |         |                      |   |
| RMRS                                      | Manufacturer               | <u>other</u>     |         |                      |   |
| Further information                       | :                          |                  |         |                      |   |

### Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

## Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


## **CAx-Online-Generator**

http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RT1025-1AK60/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RT1025-1AK60

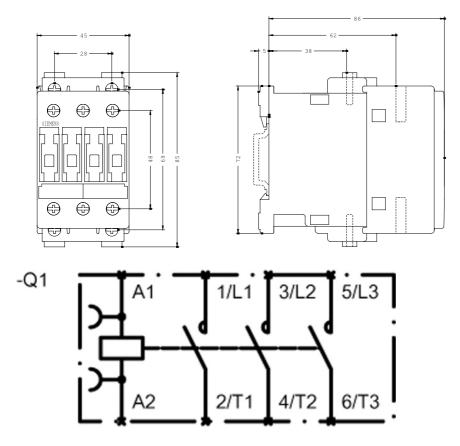



last change:

Feb 10, 2012