


Miniature Flange Mount With Wire Leads


1032 Series

Applications

- · Flanges for rapid mounting
- · Convenient surface mounting
- · Includes adhesive mounting strips
- · Mounting screws

General Specifications

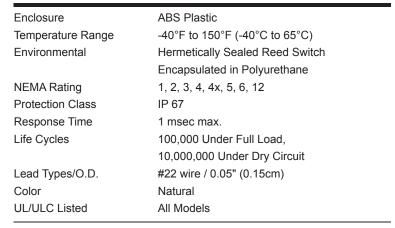

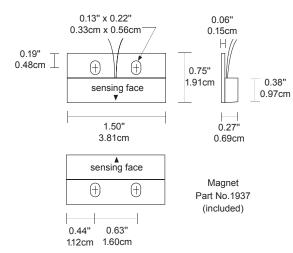



Order Information		Electrical Specifications					
Part Number	Contact ¹ Configuration	Load Rating (AC/DC)	Switching Voltage (AC/DC)	Switching Current (AC/DC)	Contact Resistance	Sense Range ² Nominal	Lead Length
1032-N	N.O.	7.5W/VA	100V	0.5A	0.2 Ohms	0.6"(1.6cm)	1'
1032W-N	N.O.	7.5W/VA	100V	0.5A	0.2 Ohms	1.0"(2.5cm)	1'
1937-N	Actuator Only						

Warning— Each electrical rating is an individual maximum and cannot be exceeded!

- ¹ Configuration with actuator away from the switch
- Proximity of ferrous materials usually reduces sense range typically by 50%. The shape and type of material cause a wide diversity of effects.
 Testing is required to determine actual sense range for specific applications. As measured on a nonferrous surface.
 Gap distances are nominal make distance ± 20%. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

66 1-800-336-4206 www.edwardssignaling.com