MTL4531 – MTL5531 VIBRATION TRANSDUCER INTERFACE

The MTLx531 repeats a signal from a vibration sensor in a hazardous area, providing an output for a monitoring system in the safe area. The interface is compatible with 3-wire eddy-current probes and accelerometers or 2-wire current sensors; the selection is made by a switch on the side of the module.

SPECIFICATION

See also common specification

Number of channels

One

Sensor type

2- or 3-wire vibration transducer


Location of signal source

Zone 0, IIC, T4–6 hazardous area if suitably certified Div. 1, Group A hazardous location

Hazardous-area input

Input impedance (terminals 2 & 3): $10k\Omega$

Transducer supply voltage, 3-wire (terminals 3 & 1)



Transducer supply current, 2-wire

3.3mA (nom.) for 2-wire sensors, user selectable by switch

Signal range

Minimum -20V, maximum -0.5V

DC transfer accuracy at 20°C

<±50mV

AC transfer accuracy at 20°C

0Hz to 1kHz: ±1%

1kHz to 10kHz: -5% to +1%

10kHz to 20kHz: -10% to +1%

Temperature coefficient

±50ppm/°C (10 to 65°C)

±100ppm/°C (-20 to 10°C)

Voltage bandwidth

-3dB at 47kHz (typical)


Phase response

- <14µs, equivalent to:
- -1° at 200Hz -3° at 600Hz
- -5° at 1kHz
- -50° at 10kHz
- -100° at 20kHz


Safe-area output impedance

<20Ω

MTL4531

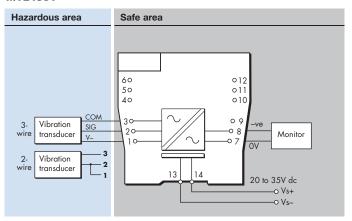

MTL5531

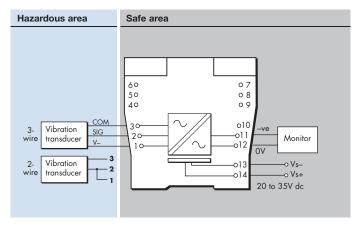

LED indicator

Green: power indication

Supply voltage

20 to 35V dc

Maximum current consumption (10mA transducer load)

96mA at 24V

Maximum power dissipation within unit

2W

Safety description

Terminals 3 to 1

 U_o =26.6V I_o =94mA P_o =0.66W U_m = 253V rms or dc

Terminals 3 to 2

Non-energy-storing apparatus ≤1.5V, ≤0.1A and ≤25mW

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

