

Radio interference suppression filter, three-phase **HLD 110-500/16**



Picture shows HLD 110-500/30


Advantages

For enhanced requirements
Single-stage filter concept
Efficient filter effect against line-bound interference emissions
Increase in the interference immunity of the connected consumer

Applications

Radio interference suppression filter for line-side interference suppression of single devices, frequency converters or as group interference suppression.

Sample application

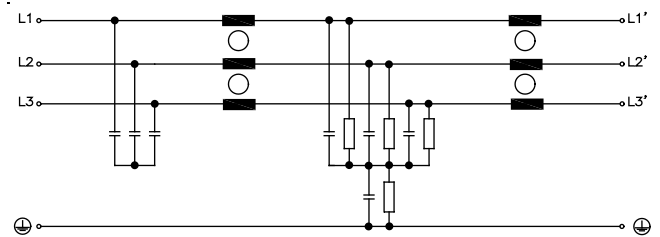


Standards

Radio interference suppression filter complying with
DIN EN 60939-2, UL 1283, CSA C22.2 No.8

Approvals



UL 1283 5th edition, CSA 22.2 No 8



Radio interference suppression filter, three-phase HLD 110-500/16

Electrical data

Type	HLD 110-500/16
Operating data	
Rated voltage	3 x 520 Vac
Voltage range	0 - 3 x 520 Vac
Rated current	3 x 16 A
Leakage current (50 Hz)*	21.00 mA
Leakage current (50 Hz)**	205.00 mA
Rated frequency	50 - 60 Hz
Power loss	12.0 W
Overrating Capacity	150 %, shortly
Standards	
Classification	EMI filter
Approvals	
Approvals	cURus, UL 1283 5th edition, CSA 22.2 No.8
Environment	
Ambient temperature max.	50 °C
Climatic category	25/085/21 (in accordance with EN 60068-1)
Safety and protection	
SCCR***	100 kA
Protection index	IP 20
Type	Metal enclosure
Safety class (prepared)	I
Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE
Notes	
*	Leakage current measured against the maximum permissible input voltage fluctuation in accordance with IEC 38 ±10 %
**	Leakage current by loss of two phases
***	with corresponding preliminary fuse
Order numbers	
Order Number	HLD 110-500/16

Mechanical data

Type	HLD 110-500/16
Terminal and mounting	
Connections phase	Screw clamp, 4 mm ²
Connections PE	Bolt, M5
Fixing method	Mounting lugs
Fixing screws	M5
Measures and weights	
Weight	1.20 kg

