

Proximity Sensors Inductive Namur Amplifier Relays Types SD 110, SD 210, SD 270

CARLO GAVAZZI



- According to DIN 19 234
- SD 110/210: Amplifier with relay output
- SD 270: Set/reset amplifier with relay output for 2 proximity switches
- Power supply to proximity switch 8.2 VDC/1 kΩ
- Galvanically separated output relay
- Load: 10 A SPDT or 8 A DPDT relay
- LED-indication for output ON
- AC or DC power supply

Product Description

Namur amplifier relay for inductive or capacitive Namur proximity switches. Single amplifier, set-reset functions.

Short circuit and cable failure monitoring. Mounting socket type S 411.

Ordering Key

SD 110 024

Housing _____
Output type _____
Power supply _____

Type Selection

Plug	Supply	Namur Amplifier Relay		Set-reset Amplifier for 2 Namur Proximity Switches
		10 A SPDT relay	8 A DPDT relay	8 A DPDT relay
Circular	24 VAC	SD 110 024	SD 210 024	SD 270 024
	115 VAC	SD 110 115	SD 210 115	SD 270 115
	230 VAC	SD 110 230	SD 210 230	SD 270 230
	24 VDC	SD 110 724	SD 210 724	SD 270 724

Input Specifications

	SD110, SD210	SD270
Inputs	1	2
Proximity switch voltage	8.2 VDC	8.2 VDC
Proximity switch current		
- activated	≤ 1.2 mA	≤ 1.2 mA
- not activated	≥ 2.1 mA	≥ 2.1 mA
Internal resistance	1 kΩ	1 kΩ
Operating frequency	10 Hz	10 Hz
Pulse time	≥ 20 ms	≥ 20 ms
Connection cable	Unshielded	Unshielded
- max. resistance	50 Ω	50 Ω

Output Specifications

	SD110	SD210, SD270
Output	SPDT relay	DPDT relay
Rated insulation voltage	250 VAC (rms) (cont./elec.)	250 VAC (rms) (cont./elec., cont./cont.)
Contact ratings (AgCdO)	μ (micro gap)	μ (micro gap)
Resistive loads AC1	10 A/250 VAC (2500 VA)	8 A/250 VAC (2000 VA)
DC1	1 A/250 VDC (250 W)	0.4 A/250 VDC (100 W)
or	10 A/25 VDC (250 W)	4 A/25 VDC (100 W)
Small inductive loads AC15	2.5 A/230 VAC	2.5 A/230 VAC
DC13	5 A/24 VDC	5 A/24 VDC
Mechanical life	≥ 30 x 10 ⁶ op.	≥ 30 x 10 ⁶ op.
Electrical life AC 1	≥ 2.5 x 10 ⁵ op. (at max. load)	≥ 2.5 x 10 ⁵ op.
Operating frequency	≤ 7200 op./h	≤ 7200 op./h
Dielectric strength		
Dielectric voltage	2 kVAC (rms) (cont./elec.)	2 kVAC (rms) (cont./elec.)
Rated impulse withstand voltage	4 kV (1.2/50 μs) (cont./elec.) (IEC 60664)	4 kV (1.2/50 μs) (cont./elec.) (IEC 60664)



Supply Specifications

Power supply AC types	Overvoltage cat. III (IEC 60664)
Rated operational volt. 230	230 VAC ± 15%, 50 to 60 Hz
Through pins 2 & 10 115	115 VAC ± 15%, 50 to 60 Hz
024	24 VAC ± 15%, 50 to 60 Hz
Voltage interruption	≤ 40 ms
Dielectric voltage	≥ 2 kVAC (rms) (supply/elec.)
Rated impulse withstand volt.	2 kV (1.2/50 µs) (line/neutral)
Power supply DC types	Overvoltage cat. III (IEC 60664)
Rated operational volt. 724	24 VDC ± 15%
Dielectric voltage	None
Rated impulse withstand volt.	800 V (1.2/50 µs)
Rated operational power	
AC supply	2.5 VA
DC supply	1.5 W

General Specifications

Indication for Output ON	LED, red
Environment	
Degree of protection	IP 20 B
Pollution degree	2 (IEC 60664)
Operating temperature	-20° to +50°C (-4° to +122°F)
Storage temperature	-50° to +85°C (-58° to +185°F)
Weight	
AC types	200 g
DC types	125 g
Approvals CE-marking	UR, CSA Yes

Mode of Operation

SD x10

Example 1

The relay operates when the proximity switch is activated. The relay releases automatically in case of interruption or short-circuit of proximity switch or cable.

sequently remains on. When proximity switch S2 is activated momentarily or the power supply is interrupted, the relay releases.

If both proximity switches are activated at the same time, S2 has priority and the relay therefore releases.

Example 2

The relay operates when the proximity switch is inactive. The relay operates in case of short-circuit of proximity switch or cable.

SD 270


The set-reset relays SD 270 are used with 2 proximity switches in the following way:

The relay operates when proximity switch S1 is activated momentarily and sub-

Accessories

Socket	S 411
Hold down spring	HF
Mounting rack	SM 13
Socket cover	BB 4
Front mounting bezel	FRS 2


Wiring Diagrams

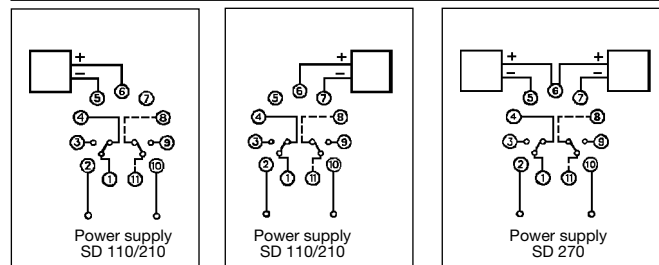

Example 1


Example 2

Dimensions

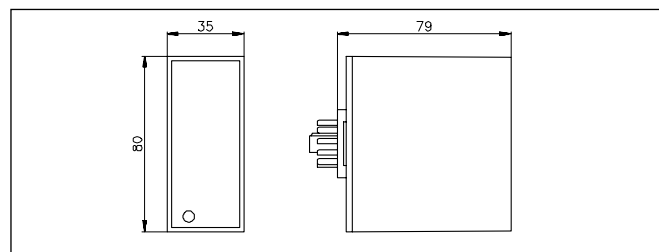

Operation Diagrams

SD x10

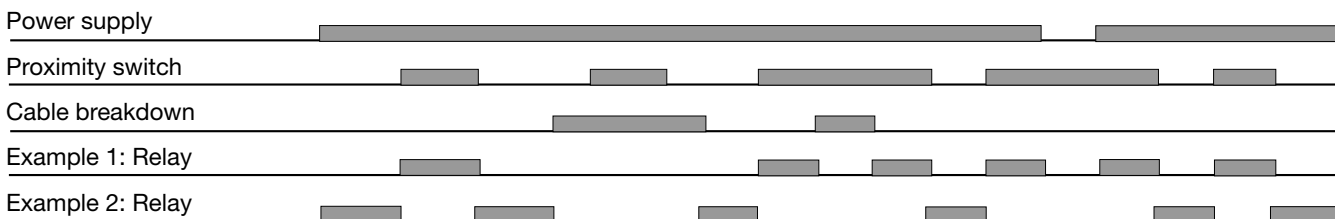

SD 270

