


## BES 516-324-G-EO-C-PU-05 BES01AR



IND. CONT. EQ  
8TU2  
for use in the secondary of  
a class 2 source of supply  
Environmental - Type 1 Enclosure

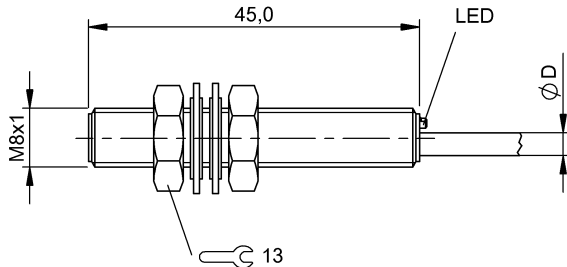

### Display/Operation

Function indicator	yes
Power indicator	no

### Electrical connection

Cable diameter D	3.10 mm
Cable length	5 m
Conductor cross-section	0.14 mm <sup>2</sup>
Connection type	Cable, 5.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Short-circuit protection	yes

### Electrical data

Hysteresis H max. (% of Sr)	15.0 %
Load capacitance max. at Ue	0.5 µF
No-load current I <sub>o</sub> max., undamped	3 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Output resistance R <sub>a</sub>	33.0 kOhm + D
Pollution degree	3
Protected against miswiring	yes
Rated insulation voltage U <sub>i</sub>	250 V AC
Rated operating current I <sub>e</sub> DC	200 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Rated short circuit current	100 A
Ready delay t <sub>v</sub> max.	20 ms
Repeat accuracy max. (% of Sr)	5.0 %
Residual current I <sub>r</sub> max.	20 µA
Switching frequency	1500 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

### Environmental conditions

Ambient temperature	-25...70 °C
Protection class	II
Protection type IEC 60529	IP68

### Functional safety

Diagnostic coverage	0.0 %
---------------------	-------

### General data

Approval/Conformity	CE cULus EAC
Basic standard	IEC 60947-5-2

### Material

Housing material	Stainless steel
Material jacket	PUR
Material sensing surface	PBT

### Mechanical data

Dimension	Ø 8 x 45 mm
Installation	for flush mounting
Size	M8x1
Tightening torque	8 Nm

### Output/Interface

Switching output	PNP Normally open (NO)
------------------	------------------------

## BES 516-324-G-EO-C-PU-05 BES01AR

Temperature drift max. (% of Sr) 10 %

### Range/Distance

Assured operating distance Sa	1.6 mm
Range	2 mm
Rated operating distance Sn	2 mm
Ripple max. (% of Ue)	15 %
Switching distance marking	■

### Remarks

The sensor is functional again after the overload has been eliminated.  
Shielded: See installation instructions for inductive sensors with extended range 825357.

### Wiring Diagram

