

Han GND hood, 7,5-14mm

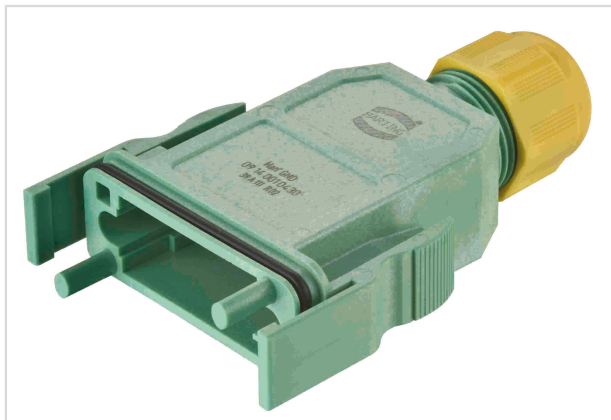


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 14 001 0430 |
| Specification | Han GND hood, 7,5-14mm |
| HARTING eCatalogue | https://b2b.harting.com/09140010430 |

Identification

| | |
|--------------------------|----------------------|
| Category | Hoods/Housings |
| Series of hoods/housings | Han [®] GND |
| Type of hood/housing | Hood |

Version

| | |
|--------------|-----------------|
| Locking type | Snap-in latches |
| Version | Top entry |
| Cable entry | 1x Integrated |

Technical characteristics

| | |
|--|----------------|
| Limiting temperature | -40 ... +85 °C |
| Mating cycles | ≥500 |
| Degree of protection acc. to IEC 60529 | IP65 |
| Cable diameter | 7.5 ... 14 mm |

Material properties

| | |
|---|--------------------|
| Material (hood/housing) | Polycarbonate (PC) |
| Colour (hood/housing) | Green Yellow |
| Material (seal) | NBR |
| Material (cable glands) | Polyamide (PA) |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |



Pushing Performance

Material properties

| | |
|-----------------------------|-----------|
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

Specifications and approvals

| | |
|----------------|-------------------------|
| Specifications | EN 60664-1 IEC 61984 |
|----------------|-------------------------|

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 2 |
| Net weight | 39.8 g |
| Country of origin | Germany |
| European customs tariff number | 85389099 |
| eCl@ss | 27440202 Shell for industrial connectors |