THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in.					TOOLS
		A ± .03	W ± .01	C ± .02	M ± .03	H ± .01	
PNF14-6LF	#6	.87 (22.10)	.25 (6.35)	.20 (5.08)	.65 (16.51)	.14 (3.56)	CT-100A +CT-400 +CT-460 *CT-600-A (CT-550CH) *CT-1550 *CT-1551 *CT-2500 (CT-2550CH)
PNF14-6LFW	#6	.84 (21.34)	.29 (7.37)	.20 (5.08)	.65 (16.51)	.14 (3.56)	
PNF14-8LF	#8	.93 (23.62)	.29 (7.37)	.25 (6.35)	.70 (17.78)	.16 (4.06)	
PNF14-10LF	#10	.93 (23.62)	.33 (8.38)	.25 (6.35)	.70 (17.78)	.19 (4.83)	

*USED FOR #18-14 AWG SOLID OR STRANDED COPPER WIRE
+UL LISTED ONLY WITH #18-14 AWG SOLID OR STRANDED COPPER WIRE

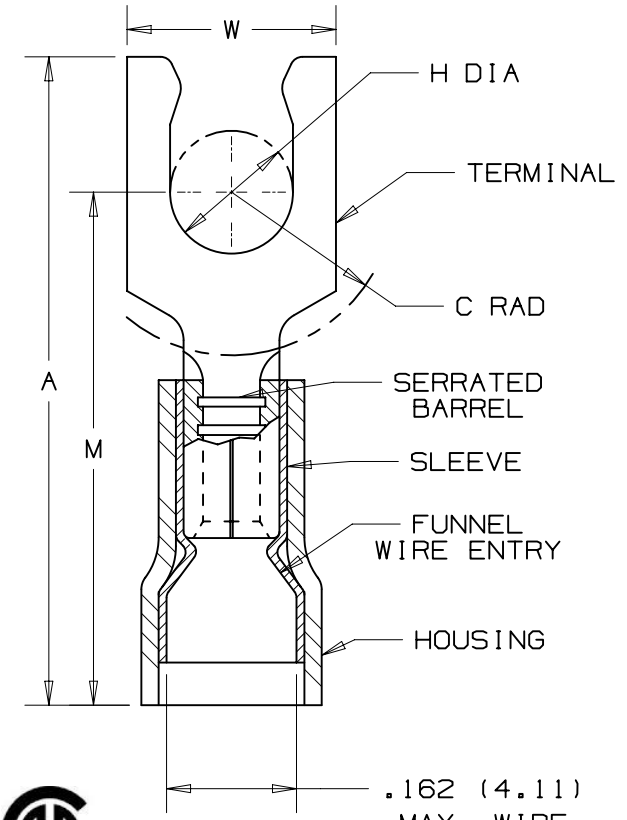

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. 600V MAX. BLDG WIRE
      1000V MAX. IN SIGNS, FIXTURES & LUMINARIES
   B. 221°F (105°C) MAX TEMP. RATING
   C. #16-14 AWG SOLID OR STRANDED, COPPER WIRE
2. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
3. MATERIAL:
   A. STAMPING - .032" THK COPPER, TIN PLATED
   B. HOUSING - NYLON, BLUE
   C. SLEEVE - BRASS, TIN PLATED
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. WIRE STRIP LENGTH: 7/32 + 1/32 (5.6 + .8) - 0 - 0

c UL us LISTED 587H E52164

CSA CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	01/15	TMR	TMR	RGB	PART NUMBER CHANGED TO PNF, CT-400 & CT-460 CHANGED TO UL LISTED ONLY	N41294BB-DC
08	06/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION, UPDATED BORDER	N41294BB-A41294

TITLE: #16-14 BARREL NYLON INSULATED LOCKING FORK, FUNNELED WIRE ENTRY, .162 [4.11] MAX. WIRE INSULATION DIAMETER

CUSTOMER DRAWING

ITEM REVISION NAME: N41294BB/09

DATASET FILE NAME: N41294BB/09

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ± .XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41294

DRAWN BY	DATE	CHK	SCALE	SIZE
DW		RLS	NONE	A

SHT 1 OF 1

D10100DA/16