THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

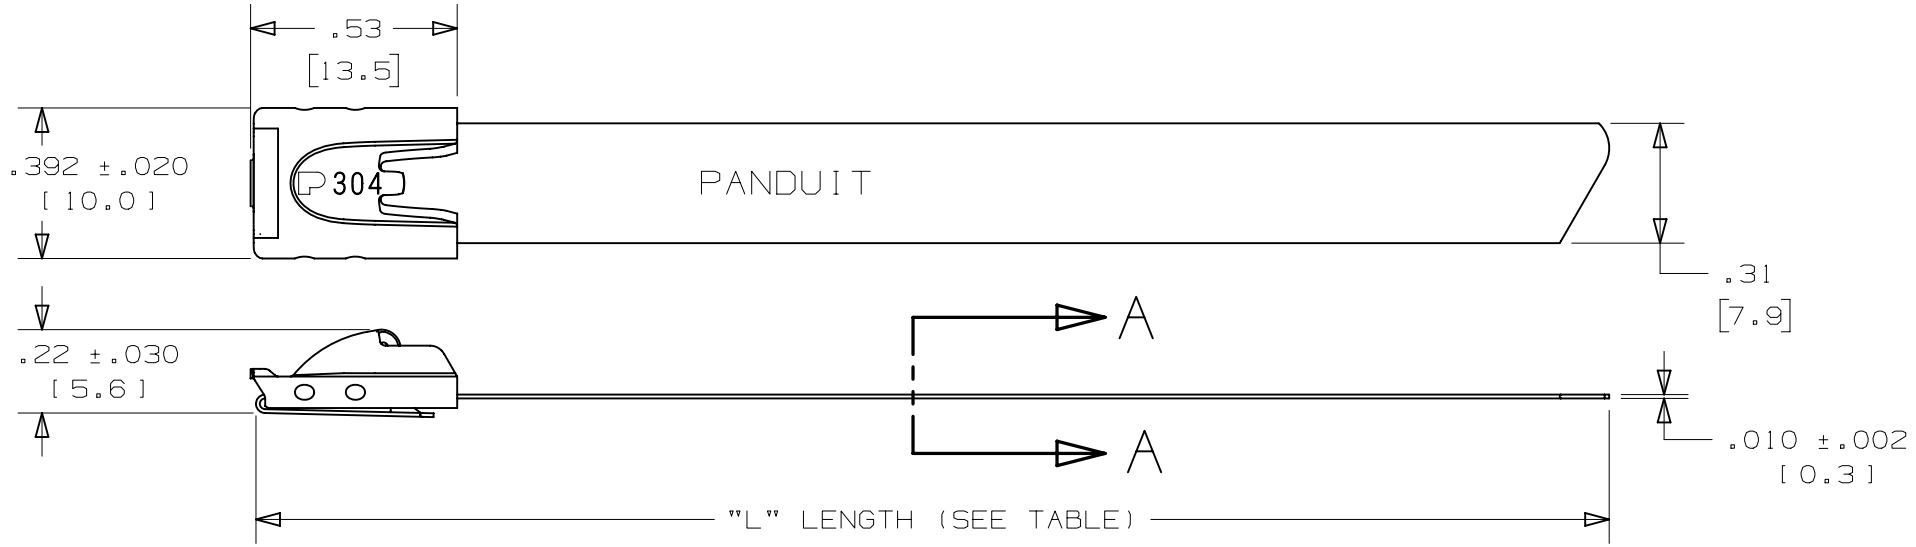



SECTION A-A
SCALE 6:1

NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS. (2000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
   .XXX = ±.010 [.25] .XX = ±.02 [.5]
   .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" ±.3 [7]
MLT2H-LP	50	2" [51]	7.9" [201]
MLT2.7H-LP	50	2.7" [69]	10.2" [259]
MLT4H-LP	50	4" [102]	14.3" [362]
MLT6H-LP	50	6" [152]	20.5" [521]
MLT8H-LP	50	8" [203]	26.8" [679]
MLT10H-LP	50	10" [254]	33.0" [838]
MLT12H-Q	25	12" [304]	39.3" [998]
MLT14H-Q	25	14" [355]	45.5" [1156]
MLT2H-TL	250	2" [51]	7.9" [201]
MLT4H-TL	250	4" [102]	14.3" [362]

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07	02.19.15	BDK	SKB	RGRO	UPDATE TITLE BLOCK AND BORDER	N41115BS_DC

TITLE
METAL LOCKING TIE - HEAVY SERIES - 304 STAINLESS STEEL
CONTROL DRAWING

ITEM REVISION NAME: N41115BS/07

DATASET FILE NAME: N41115BS_DC/07A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5°
THIRD ANGLE PROJECTION

MATERIAL: 304 STAINLESS STEEL

DRAWING NUMBER: N41115BS_DC

DRAWN BY	DATE	CHK	SCALE	SIZE
JAMB	2/12	DPN	2:1	A

SHT 1 OF 1