REV.	DATE	DESCRIPTION
A	01/12/02	MODIFY FERRULE LENGTH

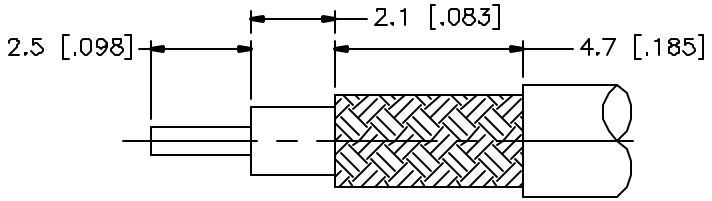

RECOMMENDED CABLE
STRIPPING DIMENSIONS

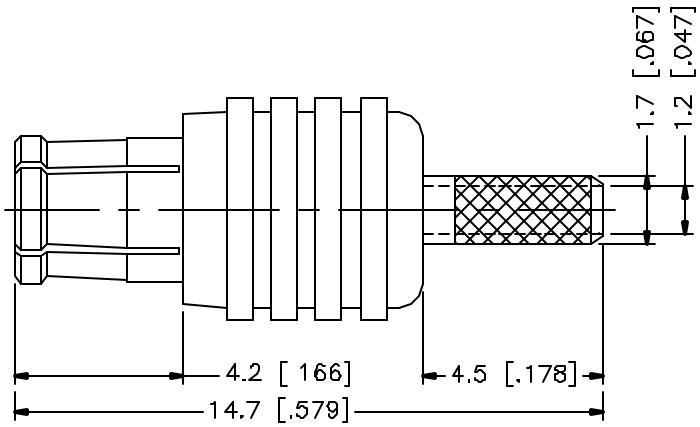

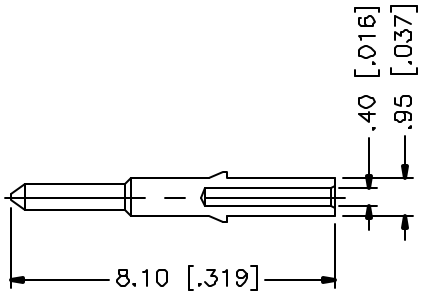

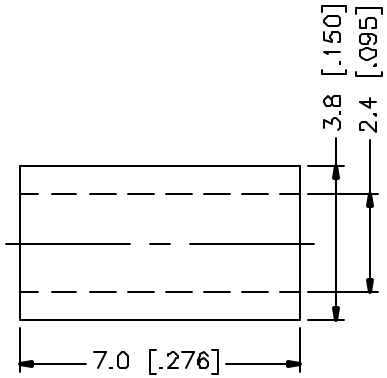

	DESCRIPTION	MATERIAL	FINISH
1	HOUSING	BRASS	GOLD
2	BODY	BER. COPPER	GOLD
3	INSULATOR	TEFLON	NATURAL
4	INSULATOR	TEFLON	NATURAL
5	CONTACT PIN	BRASS	GOLD 30 MIN.
6	FERRULE	COPPER	GOLD
7			
8			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1
315–1000 = ± 1.6
1000–2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	01/12/02
CHECKED		
ISSUED		

Connector Corporation

TITLE: MCX STRAIGHT CRIMP PLUG (FOR 178/u, 196/u CABLE)

SIZE	FSCM NO	DWG NO.	REV.
A	99001	252127.DWG	A

SCALE	PART NO.	SHEET
NA	252127	1 OF 1