REV.	DATE	DESCRIPTION
A	02/24/03	UPDATE DRAWING FORMAT
B	07/31/07	REVISE PART ORIENTATION

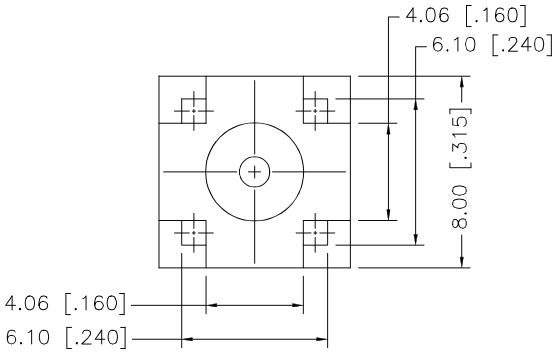

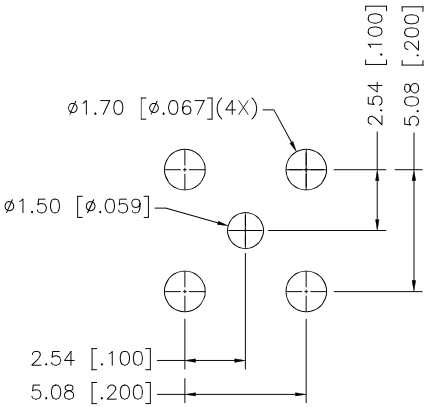

PCB MOUNTING HOLE

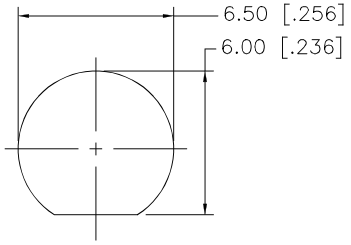

RECOMMENDED MOUNTING HOLE

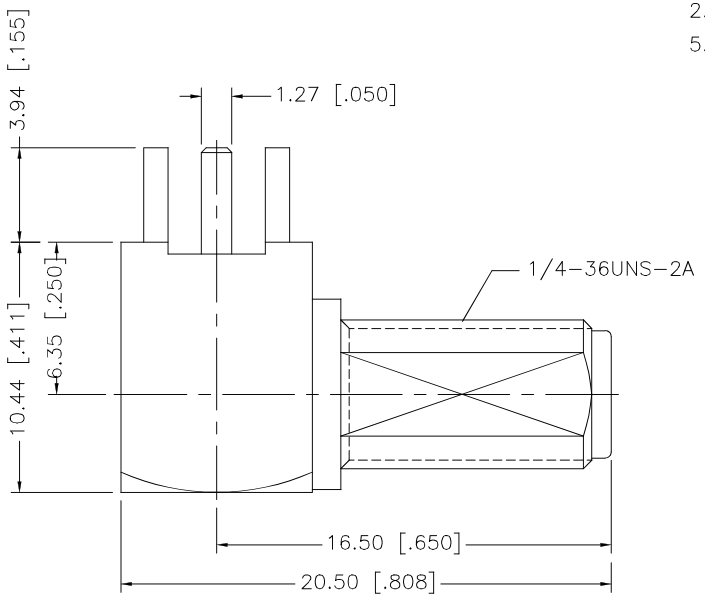

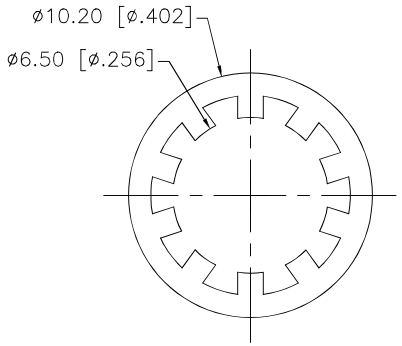



NOTE:

1. MAX. PANEL THICKNESS 2.4mm [.094]

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	HEX NUT	BRASS	GOLD	1
6	LOCK WASHER	BRASS	GOLD	1
5	CONTACT PIN	BRASS	GOLD	1
4	INSULATOR	TEFLON	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	HOUSING/BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/31/07
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/132/132203RP.DWG

Amphenol Connex

PART DESCRIPTION
SMA R/A BULKHEAD P.C. MOUNT JACK
(REVERSE POLARIZED)

PART NO. 132203RP

DWG. NO.	REV.	SIZE	SCALE
132203RP.DWG	B	A	NA