


**■ Features :**


- Universal AC input / Full range
- 3 pole AC inlet IEC320-C14
- Class I power ( with earth pin)
- Full output 3~48V safety approval
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- Fix switching frequency and regulation
- Topology: Top switch circuit
- LED indicator for power on
- Approvals: UL / CUL / TUV / CB / CE
- 2 years warranty


**SPECIFICATION**

ORDER NO.	MES50A-0R1B	MES50A-1R1B	MES50A-1-1R1B	MES50A-2P1J	MES50A-3P1J	MES50A-4P1J	MES50A-5P1J	MES50A-6P1J	MES50A-7P1J	MES50A-8P1J		
OUTPUT	<b>SAFETY MODEL NO.</b>	MES50A-0	MES50A-1	MES50A-1-1	MES50A-2	MES50A-3	MES50A-4	MES50A-5	MES50A-6	MES50A-7	MES50A-8	
	<b>DC VOLTAGE</b> Note.2	3.3V	5V	7.5V	9V	12V	15V	18V	24V	28V	48V	
	<b>RATED CURRENT</b>	7.5A	7.5A	5.33A	5.0A	4.16A	3.33A	2.77A	2.08A	1.78A	1.04A	
	<b>CURRENT RANGE</b>	0 ~ 7.5A	0 ~ 7.5A	0 ~ 5.33A	0 ~ 5.0A	0 ~ 4.16A	0 ~ 3.33A	0 ~ 2.77A	0 ~ 2.08A	0 ~ 1.78A	0 ~ 1.04A	
	<b>RATED POWER</b>	24.75W	37.5W	40W	45W	50W	50W	50W	50W	50W	50W	
	<b>RIPPLE &amp; NOISE (max.)</b> Note.3	50mVp-p	50mVp-p	75mVp-p	90mVp-p	100mVp-p	100mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	
	<b>VOLTAGE ADJ. RANGE</b>	Fixed										
	<b>VOLTAGE TOLERANCE</b> Note.4	±10%	±6.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%	
	<b>LINE REGULATION</b> Note.5	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	<b>LOAD REGULATION</b> Note.6	±10%	±6.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%	
<b>SETUP, RISE, HOLD UP TIME</b>	300ms, 50ms, 16ms at full load											
INPUT	<b>VOLTAGE RANGE</b>	90 ~ 264VAC 135~370VDC										
	<b>FREQUENCY RANGE</b>	47~63Hz										
	<b>EFFICIENCY (Typ.)</b>	60%	67%	70%	72%	74%	75%	78%	78%	80%	80%	
	<b>AC CURRENT</b>	1.5A / 100VAC										
	<b>INRUSH CURRENT (max.)</b>	90A / 230VAC										
	<b>LEAKAGE CURRENT (max.)</b>	0.5mA / 240VAC										
PROTECTION	<b>OVERLOAD</b>	112 ~ 250% rated output power					150 ~ 350% rated output power					
		Protection type : Hiccup mode, recovers automatically after fault condition is removed										
	<b>OVER VOLTAGE</b>	110 ~ 150% rated output voltage										
	Protection type : Hiccup mode, recovers automatically after fault condition is removed											
<b>OVER TEMPERATURE</b>	Tj 135°C typically (IC1) detect on main control IC											
	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down											
ENVIRONMENT	<b>WORKING TEMP.</b>	0 ~ +65°C (Refer to output load derating curve)										
	<b>WORKING HUMIDITY</b>	20% ~ 90% RH non-condensing										
	<b>STORAGE TEMP., HUMIDITY</b>	-20 ~ +85°C, 10 ~ 95% RH										
	<b>TEMP. COEFFICIENT</b>	±0.03% / °C ( 0 ~ 50°C)										
	<b>VIBRATION</b>	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes										
SAFETY & EMC (Note. 7)	<b>SAFETY STANDARDS</b>	UL2601-1, IEC60601-1, EN60601-1 approved										
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P: 5656VDC, I/P-FG: 2828VDC										
	<b>ISOLATION RESISTANCE</b>	I/P-O/P, I/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH										
	<b>EMI CONDUCTION &amp; RADIATION</b>	Compliance to EN55011(CISPR11) class B										
	<b>HARMONIC CURRENT</b>	Compliance to EN61000-3-2,3										
	<b>EMS IMMUNITY</b>	Compliance to EN60601-1-2 (EN61000-4-2,3,4,5,6,8,11) light industry level, criteria A										
OTHERS	<b>MTBF</b>	-----										
	<b>DIMENSION</b>	147*75.5*43.2mm (L*W*H)										
	<b>PACKING</b>	0.55Kg ; 36pcs / 21Kg / CARTON										
CONNECTOR	<b>PLUG</b>	See page 2, Other type available by customer requested										
	<b>CABLE</b>	See page 2, Other type available by customer requested										
NOTE	1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load. 7.The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.											

## Mechanical Specification


Unit:mm

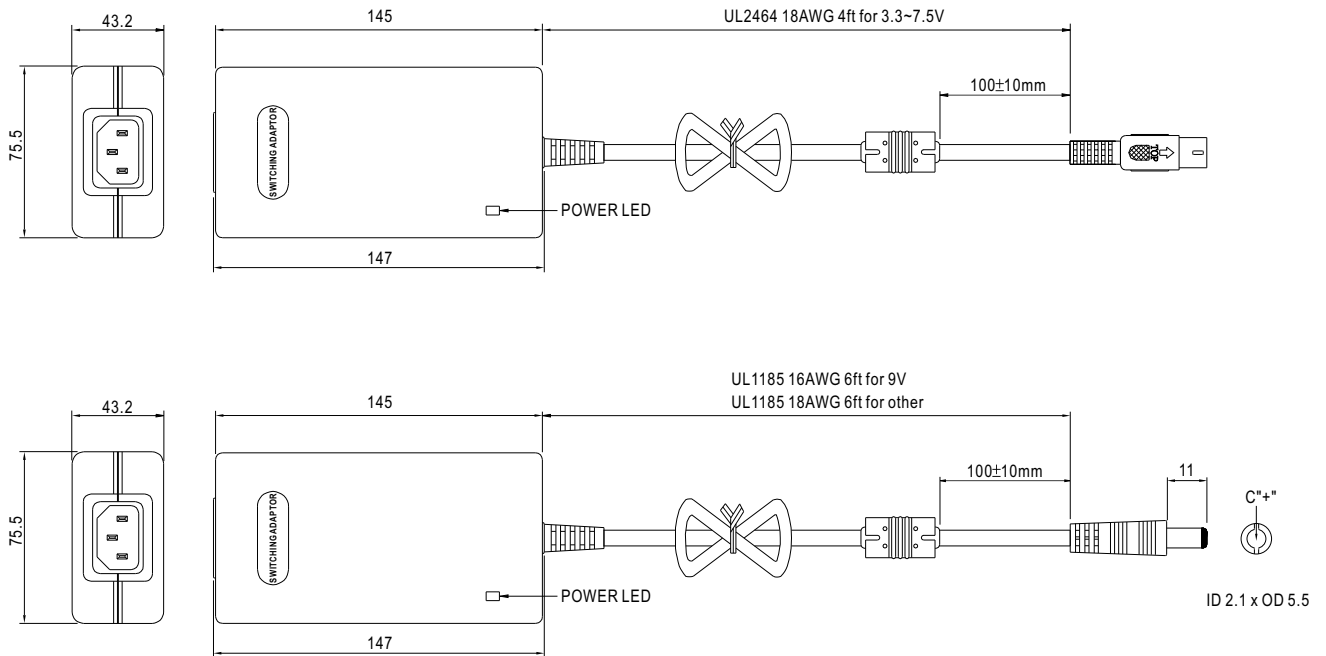

## Plug Assignment


Standard plug: Others P1J (option)

P1J	
P/N	OUTPUT
CENTER	+




Standard plug: 3.3V,5V,7.5V R1B (option)

PIN NO	OUTPUT
1	COM
2	COM
3	+Vout
4	COM
5	+Vout



## Derating Curve

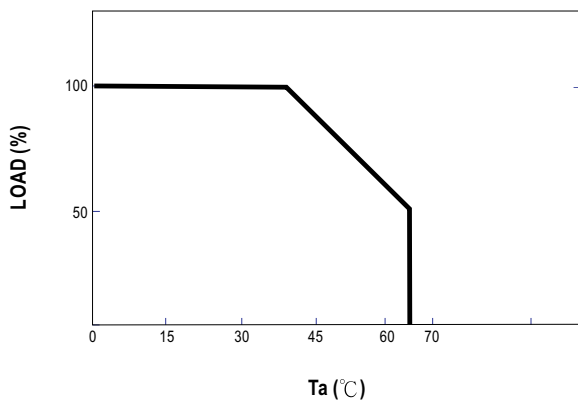

## Static Characteristics

