6 CABLE SPEC.	RG-59 AUDIO & VIDEO CABLE 75 OHM,80% BRAID,22 AWG STRANDED CABLE			
PART NUMBER	LENGTH (FEET)	TOLERANCE (INCHES)	COLOR BOOT	COLOR CABLE
73-6310-3	3	±0.50	BLACK	BLACK
73-6310-6	6	±1.00		
73-6310-10	10	±1.00		
73-6310-25	25	±2.00		
73-6311-3	3	±0.50	BLUE	BLUE
73-6311-6	6	±1.00		
73-6311-10	10	±1.00		
73-6311-25	25	±2.00		
73-6312-3	3	±0.50	GREEN	GREEN
73-6312-6	6	±1.00		
73-6312-10	10	±1.00		
73-6312-25	25	±2.00		
73-6313-3	3	±0.50	RED	RED
73-6313-6	6	±1.00		
73-6313-10	10	±1.00		
73-6313-25	25	±2.00		
73-6314-3	3	±0.50	YELLOW	YELLOW
73-6314-6	6	±1.00		
73-6314-10	10	±1.00		
73-6314-25	25	±2.00		

6 CABLE SPEC.	RG-58 THIN ETHERNET CABLE 50 OHM,95% BRAID&100% FOIL SHIELD,20AWG STRANDED,PVC CABLE(BELDEN 9907 EQUIV.)			
PART NUMBER	LENGTH (FEET)	TOLERANCE (INCHES)	COLOR BOOT	COLOR CABLE
73-6340-3	3	±0.50	BLACK	BLACK
73-6340-6	6	±1.00		
73-6340-10	10	±1.00		
73-6340-25	25	±2.00		
73-6361-3	3	±0.50	BLUE	BLACK
73-6361-6	6	±1.00		
73-6361-10	10	±1.00		
73-6361-25	25	±2.00		
73-6362-3	3	±0.50	GREEN	BLACK
73-6362-6	6	±1.00		
73-6362-10	10	±1.00		
73-6362-25	25	±2.00		
73-6363-3	3	±0.50	RED	BLACK
73-6363-6	6	±1.00		
73-6363-10	10	±1.00		
73-6363-25	25	±2.00		
73-6364-3	3	±0.50	YELLOW	BLACK
73-6364-6	6	±1.00		
73-6364-10	10	±1.00		
73-6364-25	25	±2.00		

6 CABLE SPEC.	RG-58AU&RG-58 THIN ETHERNET CABLE RG-58AU,50 OHM,95% BRAID,20 AWG STRANDED,PVC CABLE(BELDEN 8219 EQUIV.)			
PART NUMBER	LENGTH (FEET)	TOLERANCE (INCHES)	COLOR BOOT	COLOR CABLE
73-6300-3	3	±0.50	BLACK	BLACK
73-6300-6	6	±1.00		
73-6300-10	10	±1.00		
73-6300-25	25	±2.00		
73-6351-3	3	±0.50	BLUE	BLACK
73-6351-6	6	±1.00		
73-6351-10	10	±1.00		
73-6351-25	25	±2.00		
73-6352-3	3	±0.50	GREEN	BLACK
73-6352-6	6	±1.00		
73-6352-10	10	±1.00		
73-6352-25	25	±2.00		
73-6353-3	3	±0.50	RED	BLACK
73-6353-6	6	±1.00		
73-6353-10	10	±1.00		
73-6353-25	25	±2.00		
73-6354-3	3	±0.50	YELLOW	BLACK
73-6354-6	6	±1.00		
73-6354-10	10	±1.00		
73-6354-25	25	±2.00		

DRAWING NO.
73-6310-XX&SEE TABLE

REVISIONS

	DOCUMENT RELEASE				
01	03-31-08	YU	YU	T	Thomas Chow

受控 CONTROLLED DOCUMENT

编号 P/N	736310XX	版本 Rev	01	日期 Rel'd Date	Apr 17,08

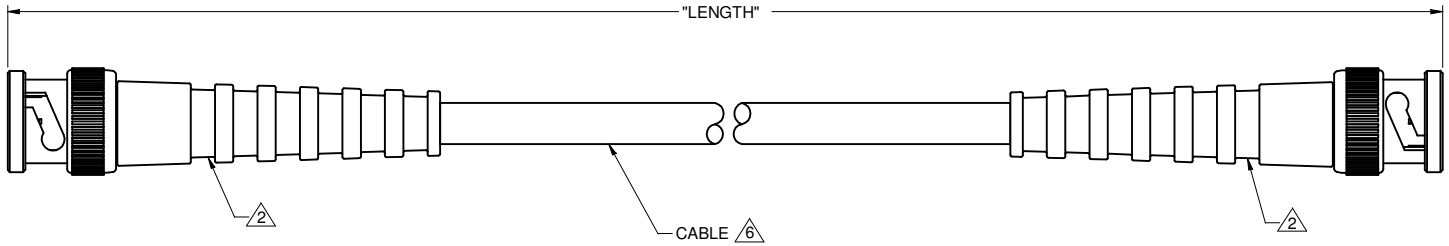

NOTES:

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE:1500 VRMS FOR A PERIOD OF ONE MINUTE.
2. SLIDE STRAIN RELIEF BOOT AGAINST BACK OF CONNECTOR.
3. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
4. PRODUCT SHOULD BE RoHS COMPLIANCE.
5. PACKAGE ONE PIECE CABLE ASSEMBLY INTO ONE BAG.

LENGTH	BAG
3 FEET	EPB-5R (5" X 8")
6 FEET	EPB-2R (7.5" X 10")
10 FEET	EPB-6R (11" X 14")
25 FEET	EPB-6R (11" X 14")

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY BETTY.YU	DATE 03-31-08
DECIMALS	INCH	CHECKED BY BETTY.YU	DATE 03-31-08
X	± 0.5		
X.X	± 0.2	APPROVED BY THOMAS	DATE 03-31-08
X.XX	± 0.1		
ANGLES	± 0.5°	U/M INCH	

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

EMERSON. Network Power — Connectivity Solutions

TITLE: CABLE ASSEMBLY, BNC STR PLUG TO BNC STR PLUG

SHEET	DRAWING NO.	SIZE
1 OF 1	73-6310-XX&SEE TABLE	C