

## 625160-000 Product Details

**Detailed product features are not currently available online.**

Product features can often be found by referring to the available documents. [Contact us](#) for information about this product.

No Image Available

### D-110-41

Not EU RoHS or ELV Compliant


**625160-000**  
(D-110-41)

TE Internal Number: 625160-000

 Active

Documentation & Additional Information	
<p><b>Product Drawings:</b></p> <ul style="list-style-type: none"> <li><a href="#">SolderSleeve Device</a> (PDF, English)</li> </ul> <p><b>Catalog Pages/Data Sheets:</b></p> <ul style="list-style-type: none"> <li>None Available</li> </ul> <p><b>Product Specifications:</b></p> <ul style="list-style-type: none"> <li>None Available</li> </ul> <p><b>Application Specifications:</b></p> <ul style="list-style-type: none"> <li>None Available</li> </ul> <p><b>Instruction Sheets:</b></p> <ul style="list-style-type: none"> <li>None Available</li> </ul> <p><b>CAD Files:</b></p> <ul style="list-style-type: none"> <li>None Available</li> </ul>	<p><b>Related Products:</b></p> <ul style="list-style-type: none"> <li><a href="#">Tooling</a></li> </ul>

# CUSTOMER DRAWING

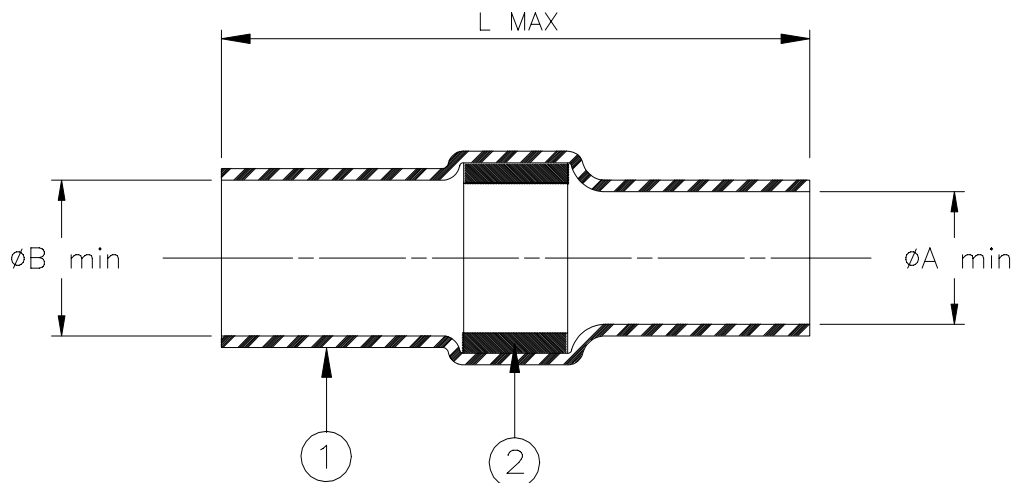


Product Name	Product Dimensions		
	L MAX	A min	B min
D-110-41	27.6 (1.090)	2.7 (0.105)	3.2 (0.125)

## **MATERIALS**

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyvinylidene fluoride, transparent blue.
2. SOLDER PREFORM WITH FLUX:  
Solder: Sn63 Pb37 per ANSI J-STD-006.  
Flux: ROL1 per ANSI-J-STD-004.

## **NOTES**

- A. The parts covered by this drawing are for use in splicing tin or silver-plated solid conductors having a combined diameter between 1.27 (.050) and 2.54 (1.00) when twisted together.
- B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly.  
TEMPERATURE RATING: -55C to +150C.

 <b>Tyco Electronics</b>		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: <p style="text-align: center;">SOLDERSLEEVE DEVICE</p>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices		DOCUMENT NO.: <p style="text-align: center;">D-110-41</p>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: <p style="text-align: center;">A</p>	DATE: <p style="text-align: center;">26-Mar-08</p>	
DRAWN BY: PTALLY	CAGE CODE: 06090	REPLACES: D980623	ECO NUMBER: 08-007722	SCALE: <p style="text-align: center;">NTS</p>	SIZE: <p style="text-align: center;">A</p>	SHEET: <p style="text-align: center;">1 of 1</p>

© 2008 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.