

# BEZ 700-IP

IP67/NEMA 4X Rated Bezel


When used in conjunction with certain panel mounted 700 series instruments (purchased separately), this bezel offers the assembly an IP67 / NEMA 4X rating from the front. The screw fixings allow for a quick and easy assembly of the module and bezel in the panel. A robust and attractive alloy construction gives the product a professional finish. BEZ 700-IP is ideally suited for applications where the ingress of moisture or particles poses a problem.

- IP67 / NEMA 4X Rated
- Screw Fixing
- Glass Window
- Robust Construction
- Attractive Appearance

## COMPATIBILITY

- DPM 742-BL
- DPM 750S-BL

### DIMENSIONS All dimensions in mm (inches)

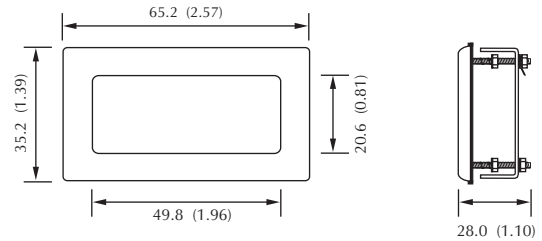

Panel Cut-out: 60.5 x 30.5mm (2.38" x 1.20")  
Panel Thickness: 2mm (0.08") minimum

LASCAR ELECTRONICS LTD.  
MODULE HOUSE  
WHITEPARISH  
WILTSHIRE SP5 2SJ  
UK  
TEL: +44 (1794) 884567  
FAX: +44 (1794) 884616  
E-mail: sales@lascar.co.uk

LASCAR ELECTRONICS INC.  
3750 West 26th Street  
Erie  
PA 16506  
USA  
TEL: +1 (814) 835 0621  
FAX: +1 (814) 838 8141  
E-mail: us-sales@lascarelectronics.com

LASCAR ELECTRONICS (HK) LIMITED  
FLAT C, 5/F., LUCKY FTY. BLDG.  
63-65 HUNG TO ROAD  
KWUN TONG KOWLOON  
HONG KONG  
TEL: +852 2797 3219  
FAX: +852 2343 6187  
E-mail: b4lascar@samsongroup.com.hk



www.lascarelectronics.com

Page 1 of 2

Specifications liable to change without prior warning

BEZ 700-IP

Issue 2

June/2002

M.C.

# BEZ 700-IP

IP67/NEMA 4X Rated Bezel


When used in conjunction with certain panel mounted 700 series instruments (purchased separately), this bezel offers the assembly an IP67 / NEMA 4X rating from the front. The screw fixings allow for a quick and easy assembly of the module and bezel in the panel. A robust and attractive alloy construction gives the product a professional finish. BEZ 700-IP is ideally suited for applications where the ingress of moisture or particles poses a problem.

- IP67 / NEMA 4X Rated
- Screw Fixing
- Glass Window
- Robust Construction
- Attractive Appearance

## COMPATIBILITY

- DPM 742-BL
- DPM 750S-BL

### DIMENSIONS All dimensions in mm (inches)

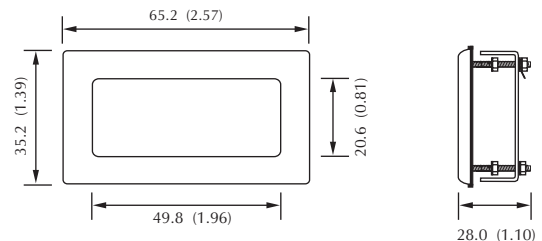

Panel Cut-out: 60.5 x 30.5mm (2.38" x 1.20")  
Panel Thickness: 2mm (0.08") minimum

LASCAR ELECTRONICS LTD.  
MODULE HOUSE  
WHITEPARISH  
WILTSHIRE SP5 2SJ  
UK  
TEL: +44 (1794) 884567  
FAX: +44 (1794) 884616  
E-mail: sales@lascar.co.uk

LASCAR ELECTRONICS INC.  
3750 West 26th Street  
Erie  
PA 16506  
USA  
TEL: +1 (814) 835 0621  
FAX: +1 (814) 838 8141  
E-mail: us-sales@lascarelectronics.com

LASCAR ELECTRONICS (HK) LIMITED  
FLAT C, 5/F., LUCKY FTY. BLDG.  
63-65 HUNG TO ROAD  
KWUN TONG KOWLOON  
HONG KONG  
TEL: +852 2797 3219  
FAX: +852 2343 6187  
E-mail: b4lascar@samsongroup.com.hk



www.lascarelectronics.com

Page 1 of 2

Specifications liable to change without prior warning

BEZ 700-IP


Issue 2

June/2002

M.C.

## MOUNTING METHOD


To ensure integrity of waterproofing, avoid overtightening nuts retaining bezel clamp bracket, as this can distort the seal.

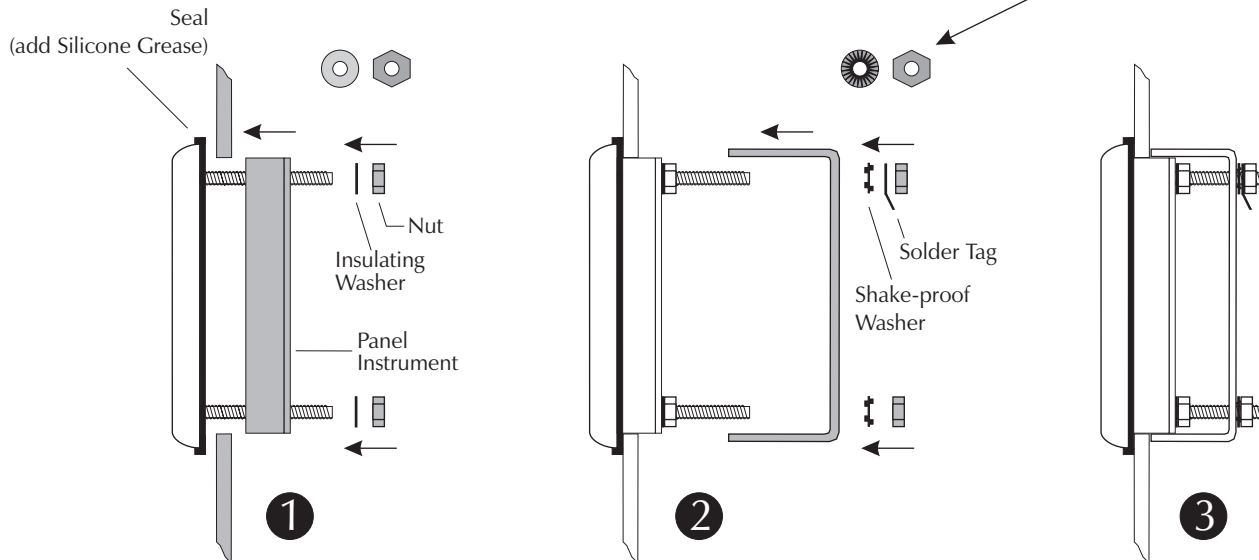

Notes: On some panel instruments it may be easier to configure links and calibrate the product prior to fitting the instrument and BEZ 700-IP into the panel. Always observe safety warnings on the Panel Instrument datasheet. Do not allow connections to touch the metal bezel, as this may adversely affect product safety or stop the panel instrument from functioning correctly. A solder tag is provided. However, it is the responsibility of the installer to ensure that any earth bonding complies with local regulations.

## MOUNTING METHOD

To ensure integrity of waterproofing, avoid overtightening nuts retaining bezel clamp bracket, as this can distort the seal.

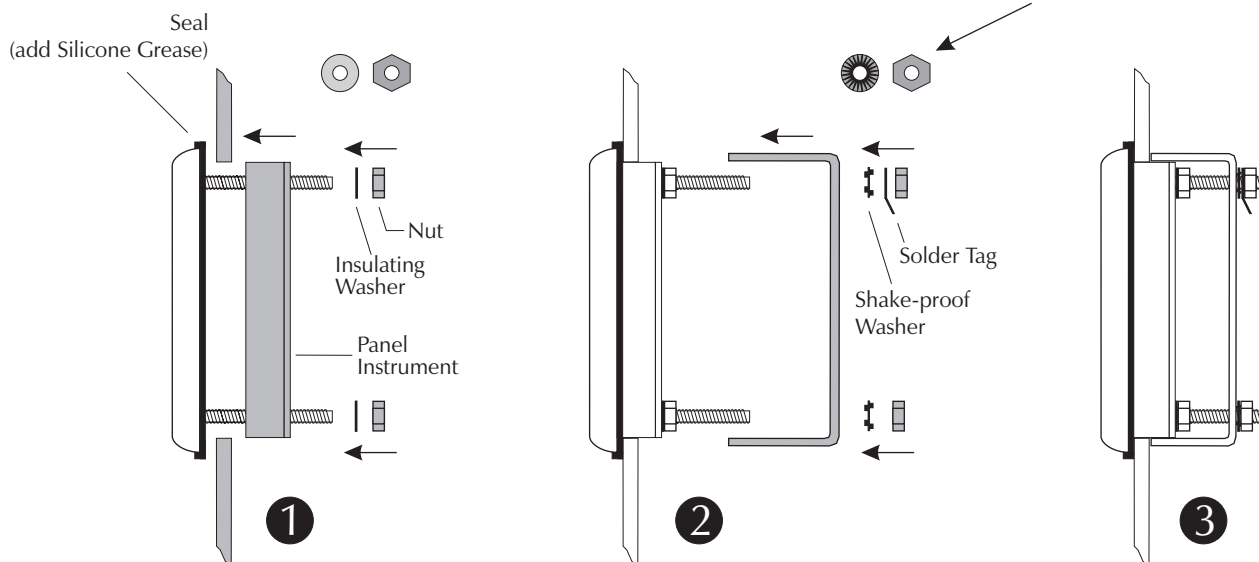

Notes: On some panel instruments it may be easier to configure links and calibrate the product prior to fitting the instrument and BEZ 700-IP into the panel. Always observe safety warnings on the Panel Instrument datasheet. Do not allow connections to touch the metal bezel, as this may adversely affect product safety or stop the panel instrument from functioning correctly. A solder tag is provided. However, it is the responsibility of the installer to ensure that any earth bonding complies with local regulations.