
GG-12A AIRCRAFT WARNING LAMP

DOUBLE CONTACT INDEX BAYONET BASE

28V 14W/40W

WAMCO PART NO.	ENVELOPE SIZE		BASE TYPE		RATING		FILAMENT SHAPE
WL-A-7796A-24	GG-12A		BAY15d		28V 14W/40W		C-6V/CC-6
	CURRENT (A) LIGHT OUTPUT (MSCP)						
TEST VOLTS	MIN	NOM	MAX	MII	MON NOM	MAX	LIFE HRS
28V	.460	.500	.540	SEE NOTE 4		TE 1	300
	1.32	1.43	1.54			150	

DIMENSIONAL CHARACTERISTICS

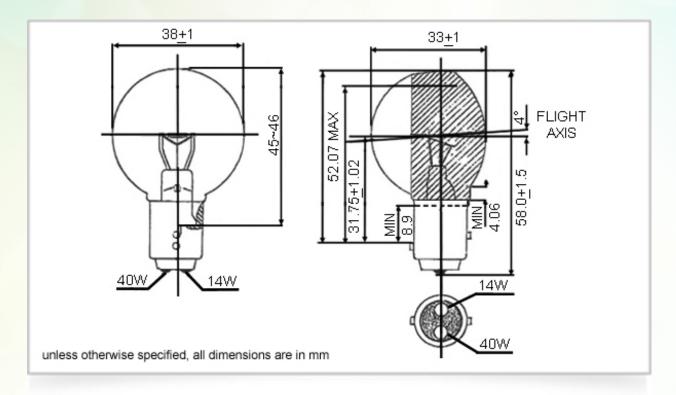

NOTES

- 1. Finish clear, except where reflective surface is required
- 2. Reflective coating must conform to the coating adhesion requirements of MIL-L-6363F, paragraph 4.6.6
- 3. Dual filament lamp
- 4. Center of beam to fall within 3° vertically and 5° horizontally of a line through the filament in the plane of base pins, making an angle of 86° with the base axis
- 5. Park mark WL-A-7796A-24, 28V, 14W/40W
- 6. RoHS compliant

