MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V7–2B17D8–207

CW–B3087

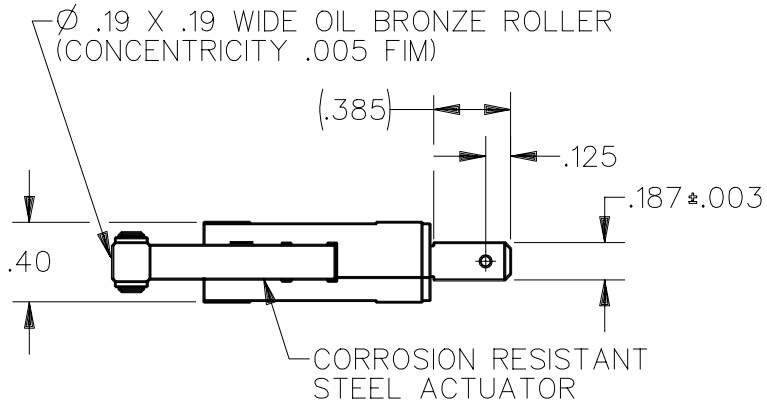

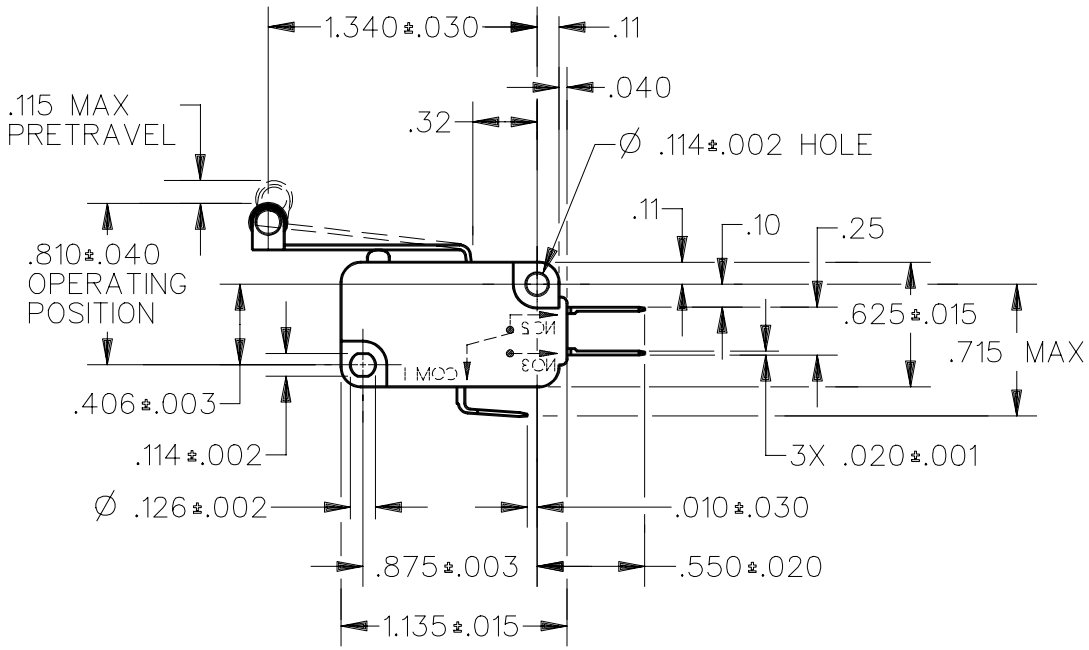

REVISIONS

A	CO 76214	GRT 20 OCT 93

CATALOG LISTING V7–2B17D8–207 ISSUE 2 M

REPLACES
RELEASE NO. PR–19218

	DRAWN	CHECK
DDM/CAD	WJC 11 JUN 91	JAL 12 JUN 91

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE— — —45 GRAMS MAX

RELEASE FORCE— — — —3 GRAMS MIN

DIFFERENTIAL TRAVEL— — —.025 MAX

OVERTRAVEL— — — — — —.065 MIN

RELEASE TRAVEL — — — — .016 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT