MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
V7–1A17D8
CW–B0240

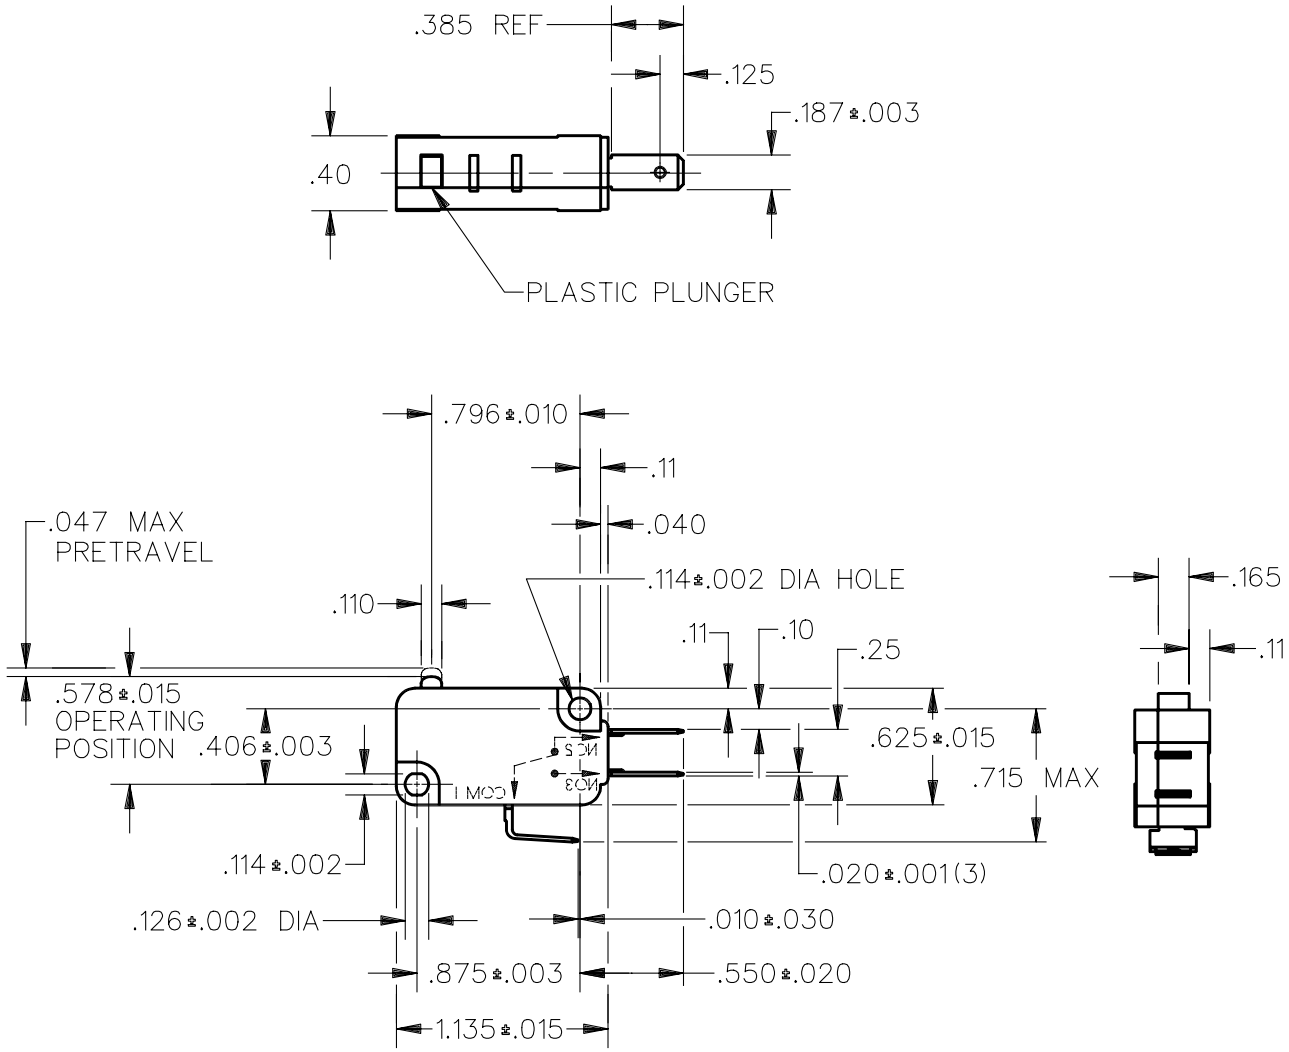

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE — — — 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE — — — 25 GRAMS MIN	L162 5A 125, 250, 277 VAC 1/10 HP 250 VAC	ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — .002–.010		TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — — .050 MIN		THREE PLACE (.000) ±.005
FREE POSITION — — — — — .625 MAX		ANGLES ±
RELEASE TRAVEL — — — — — .010 MIN		WEIGHT

REPLACES X94122–V7
RELEASE NO. PR–17140
CATALOG LISTING V7–1A17D8
ISSUE 4

REVISIONS		
A	C066350	JAP 21 SEP 89
B	C069746	WJC 15 MAR 91
C	C074430	D H D 24 FEB 93

DRAWN	DCS	27 FEB 89
CHECK	JAP	28 FEB 89
CHECK		
CHECK		

DDM/CAD