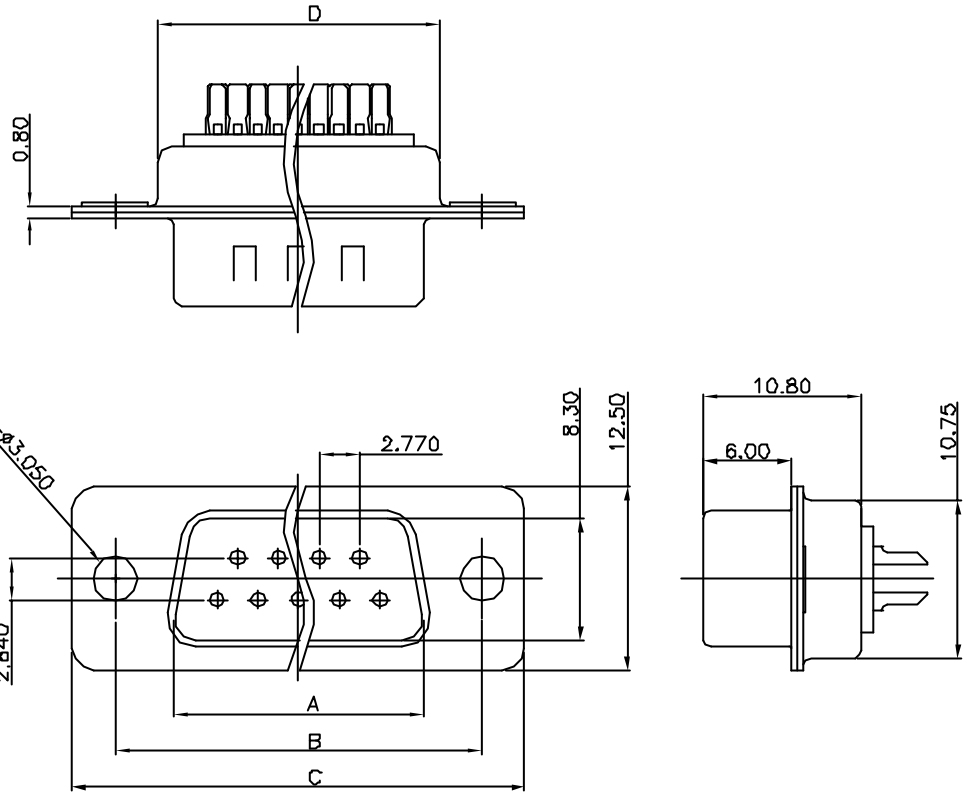

PIN NO:	A±0.20	B±0.10	C±0.20	D±0.20
50	52.81	61.00	67.00	55.10
37	55.42	63.50	69.40	57.30
25	38.96	47.04	53.10	41.10
15	25.25	33.32	39.20	27.70
09	16.92	25.00	30.80	19.20

NOTE
MATERIAL
INSULATOR: PBT +30%GF
CONTACTS: BRASS
SHELL: SPCD
CONTACT PLATING: GOLD PLATING OVER NICKEL
ELECTRICAL SPECFICATION
CURRENT RATING: 2A;
CONTACT RESISTANCE: 30mΩ MAX.
INSULATION RESISTANCE:1000MΩ MIN 500V DC.
DIELECTRIC WITHSTANDING VOLTAGE:500V AC
ENVIRONMENTAL
OPERRATING TEMPERATURE: -55°C~105°C.

QUEST TECHNOLOGY INTERNATIONAL,Inc.				DESCRIPTION	D-SUB MALE SOLDER TYPE	SCALE	4/1 UNTTS:MM	SRD ANGLE
				MODEL NO		△		
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO	DSC-11XX	△		
		CJJ	CJJ	FINISHING		△	2011/07/12	A1
				MATERIAL		SYM	DATE	REVISION