


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REV	DESCRIPTION	DATE	APPROVED
E	ECN 4101: CN RELEASE AND NEW FORMAT	7/17/09	D. FRISIELLO
F	ECN 4285: CORRECT LENGTH OF CCS316-08 TO .66 [0.20]	9/28/09	D. FRISIELLO
F	ECN 99999: CCS316-010 WAS CCS316-10. ADDED PS-0031	10/12/10	D. CASTRO
G	ECN 5080: ADDED CCS316-10. CHANGE CCS316-010 TO INCHES	10/13/10	D. CASTRO

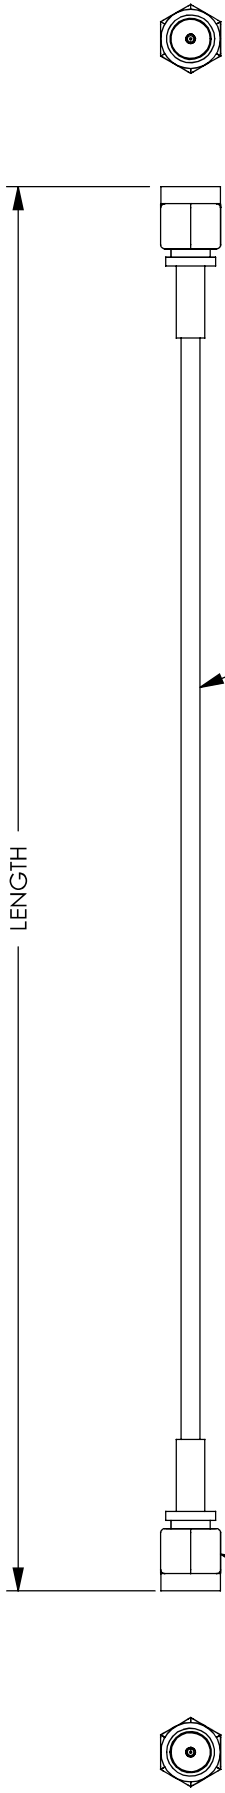

2X SMA PLUG
NICKEL PLATE OVER BRASS
GOLD PLATED CENTER CONTACTS

RG316/U, 50 OHMS COAXIAL CABLE
STRANDED TINNED COPPER COVERED STEEL.
WITH SILVER COATED COPPER ALLOY
BRAID SHIELD.
JACKET: FEP, BROWN

MODEL #	LENGTH FEET [METERS]
CCS316-08	0.66 [0.20]
CCS316-010	0.83 [0.25]
CCS316-1	1.0 [0.30]
CCS316-1.5	1.5 [0.46]
CCS316-2	2.0 [0.61]
CCS316-2.5	2.5 [0.76]
CCS316-3	3.0 [0.91]
CCS316-4	4.0 [1.22]
CCS316-5	5.0 [1.52]
CCS316-7.5	7.5 [2.29]
CCS316-10	10.0 [3.05]

RoHS Compliant ✓

NOTES:

- CABLE ASSEMBLY IS DESIGNED FOR HIGH TEMPERATURE APPLICATIONS.
- OPERATING TEMPERATURE RANGE: -70 °C TO +200 °C.
- CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
APPROVALS DRAWN BY: C. MCCORMICK CHECKED BY: D. PARHAM APPROVED BY: R. CARRICK		DATE 05/07/2001 05/11/2001 05/14/2001	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +3% / -3%		CATEGORY COAXIAL	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005		PRODUCT DESCRIPTION CA SMA M/SMA M RG316/U	
PROJECTION 		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
COLOR VARIATIONS MAY OCCUR		SIZE A	
FSCM NO. 43321		DWG. NO. CCS316	
SCALE: NONE		CAD FILE: CCS316.SLDDRW	
SHEET 1 OF 1		REV. C	