




Plastic Boxes
**UL/NEMA/IEC NBE
Series**

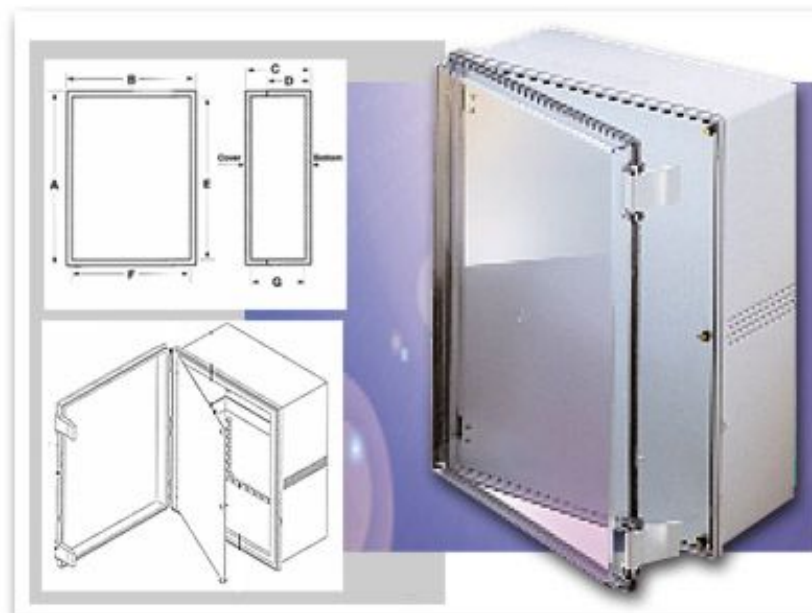

[Click on Image for Larger View](#)

These gasketed enclosure meet NEMA 4X, IEC529, IP65, and UL-508-4X specifications which allows them to be used in many wet, dirty and/or corrosive environments.

Design Features

Indoor Versions:





*ABS/PC blended plastic with UL94-5VB flammability rating. Suggested service temperature range -40C to +70C.


*Clear doors are polycarbonate with UL94-5VA flammability rating.

Outdoor Versions:

*PC/PBT blended plastic with UL94-5VA flammability rating and UV stabilized



Catalog Number				NBE Series											
Indoor Version		Outdoor Version		Drawings	Nominal Sizes			Actual External				Internal			Wgt.
Solid Door	Clear Door	Solid Door	Clear Door		A	B	C	A	B	C	D	E	F	G	Lbs.
NBE-10543	NBE-10563	Contact BUD Factory			290mm	190mm	140mm	11.28"	7.47"	5.50"	4.33"	10.46"	6.65"	5.25"	3.5
NBE-10547	NBE-10567				390mm	290mm	160mm	15.68"	11.73"	6.30"	5.11"	14.88"	10.89"	6.03"	6.3
NBE-10553	NBE-10573				465mm	350mm	200mm	19.17"	14.64"	7.85"	6.67"	18.33"	13.75"	7.60"	7.9
NBE-10558	NBE-10578				700mm	500mm	250mm	28.91"	21.03"	9.87"	8.66"	27.56"	19.67"	9.53"	9.8

 Autocad DXF Specifications File
(Requires CAD software such as AutoCAD)

 Adobe PDF Specifications File



[Download PDF Viewer](#)

[Home](#) | [Company Info](#) | [Online Catalog](#) | [Check Stock](#) | [Distributor/Price](#)

[Reps](#) | [New](#) | [Search](#) | [Contact](#) | [Privacy Policy](#)

BUD INDUSTRIES INC.

P.O. Box 998
Willoughby, Ohio 44094
Phone: 440-946-3200 Fax: 440-951-4015
E-Mail: saleseast@budind.com