

### Cooper Bussmann

- Homepage
- About Cooper Bussmann
- Contact Us
- Privacy
- Legal
- Cooper Bussmann® Brand
- Site Map



## FRN-R-70

Class RK5, Dual Element, Time Delay

### Product Information

Product Type:	Fuse
Product Family:	Electrical Power
Upgrade Product:	<a href="#">LPN-RK-70SP</a>
Brand:	Cooper Bussmann
Sub-brand:	Fusetron
Class:	RK5

### Recommended Products

Rec. Fuse Block:	<a href="#">R25100 Series</a>
Rec. Cover:	<a href="#">SAMI-4 Series</a>

### Physical Properties

Dimensions:	5.88in. (L) × 1.06in. (W) × 0in. (H)
-------------	--------------------------------------

### Certifications

[UL Listed](#)

[CSA Certified](#)

### Electrical Properties

Maximum AC Voltage:	250
Maximum DC Voltage:	125
Amperage Rating:	70
AC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 200000 at 250V</li> </ul>
DC Interrupting Ratings:	<ul style="list-style-type: none"> <li>• 20000 at 125V</li> </ul>
Fuse Class:	Class RK5
Time Delay:	Yes

# Fusetron®

## Dual-Element, Time-Delay Fuses

### Class RK5 – 250 Volt

FRN-R  
70-600A



Catalog Symbol: FRN-R †  
 Current-Limiting  
 Dual-Element, Time-Delay – 10 seconds (minimum) at 500% rated current  
 Ampere Rating: 70 to 600A  
 Voltage Rating:  
     250Vac (or less)  
     125Vdc (70-200A)  
     250Vdc (201-600A)  
 Interrupting Rating:  
     200,000A RMS Sym.  
     20,000A AIC  
 Agency Information:  
 UL Listed, Std. 248-12, Class RK5, Guide JDDZ, File E4273  
 CSA Certified, C22.2 No. 248.12, Class 1422-01, File 53787

#### Catalog Numbers

FRN-R-70	FRN-R-125	FRN-R-350
FRN-R-75	FRN-R-150	FRN-R-400
FRN-R-80	FRN-R-175	FRN-R-450
FRN-R-85	FRN-R-200	FRN-R-500
FRN-R-90	FRN-R-225	FRN-R-600
FRN-R-100	FRN-R-250	—
FRN-R-110	FRN-R-300	—


#### Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
70-100	5	1.5	0.680
101-200	1	0.77	0.349
201-400	1	1.52	0.689
401-600	1	3.0	1.4


\*Weight per carton.

† To obtain information for 0-60A, access Data Sheet: 1019


#### Dimensional Data




70A to 100A



110A to 200A



225A to 400A

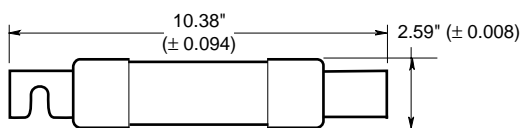

450A to 600A

#### General Information:

- Provides motor overload, ground fault and short-circuit protection.
- Helps protect motors against burnout from overloads and single phasing when sized properly.
- Simplifies and improves blackout prevention (selective coordination).
- Dual-element fuses can be applied in circuits subject to temporary motor overloads and surge currents to provide both high performance short-circuit and overload protection.
- The overload element provides protection against low level overcurrent of overloads and will hold on inrush current which is five times greater than the ampere rating of the fuse for a minimum of ten seconds.

#### Fuse Reducers For Class R Fuses

Equipment Fuse Clips	Desired Fuse (Case) Size	Catalog Number (Pairs) 250V
200A	100A	No. 2621-R
	400A	No. 2641-R
400A	100A	No. 242-R
	200A	No. 2661-R
600A	200A	No. 2662-R
	400A	No. 2664-R*

\*Single reducer only (pair not required).

CE