

Pro Wick Desoldering Braid 1802-1813

Desoldering braid (wick) is pre-fluxed copper braid that is used to remove solder, which allows components to be replaced and excess solder to be removed.

Techspray wick is available in static dissipative bobbins (except where indicated) for static sensitive environments.





Rosin coated braid for fast wicking action

For the fastest wicking action, rosin flux coated braid is ideal for high volume PCB production/repair environments.

- Rosin flux coated braid
- Fastest wicking action
- Exceeds MIL-F-14256, Type
- · Anti-static spool (except where indicated)

Product Packaging





1802-25F

25'

1803-5F Pro Wick Green #3 Braid 5' 25 units/case



1802-100F Pro Wick Yellow #2 Braid 100' 1 units/case



1803-10F Pro Wick Green #3 Braid 10' 25 units/case

Techspray - US office, P.O. Box 949, Amarillo, TX 79105-0949, Tel. 806-372-8523, Toll-free 800-858-4043 Fax 806-372-8750, tsales@techspray.com

Technical Data Sheet

TECHSPRAY



1804-5F Pro Wick Blue #4 Braid 5' 25 units/case

1804-50F

Pro Wick Blue #4 Braid

50'

1 units/case

1805-5F

Pro Wick Brown #5 Braid

5'

25 units/case



1803-100F

1804-10F Pro Wick Blue #4 Braid 10' 25 units/case



1804-100F Pro Wick Blue #4 Braid 100' 1 units/case



1806-100F Pro Wick Red #6 Braid 100' 1 units/case 1803-500F Pro Wick Green #3 Braid 500' 1 units/case



1804-25F Pro Wick Blue #4 Braid 25' 1 units/case



1804-500F Pro Wick Blue #4 Braid 500' 1 units/case



1808-5F Pro Wick White #1 Braid - AS 5' 25 units/case




Techspray - US office, P.O. Box 949, Amarillo, TX 79105-0949, Tel. 806-372-8523, Toll-free 800-858-4043 Fax 806-372-8750, tsales@techspray.com

TECHSPRAY

Technical Data Sheet







1809-10F Pro Wick Yellow #2 Braid - AS 10' 25 units/case



1810-10F Pro Wick Green #3 Braid - AS 10' 25 units/case



1808-100F Pro Wick White #1 Braid - AS 100' 1 units/case



1809-25F Pro Wick Yellow #2 Braid - AS 25' 1 units/case



1810-25F Pro Wick Green #3 Braid - AS 25' 1 units/case



1809-5F Pro Wick Yellow #2 Braid - AS 5' 25 units/case




1810-5F Pro Wick Green #3 Braid - AS 5' 25 units/case



1810-100F Pro Wick Green #3 Braid - AS 100' 1 units/case



Techspray - US office, P.O. Box 949, Amarillo, TX 79105-0949, Tel. 806-372-8523, Toll-free 800-858-4043 Fax 806-372-8750, tsales@techspray.com

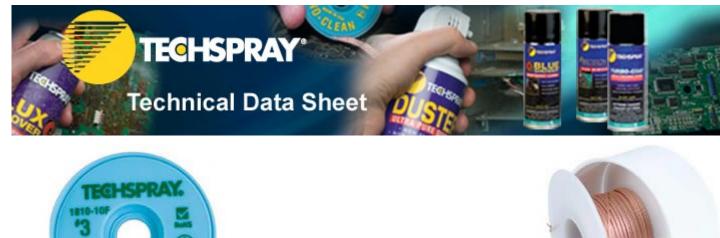



1811-5F Pro Wick Blue #4 Braid - AS 5' 25 units/case



1811-100F Pro Wick Blue #4 Braid - AS 100' 1 units/case



1811-10F Pro Wick Blue #4 Braid - AS 10' 25 units/case

1812-5F Pro Wick Brown #5 Braid - AS 5' 25 units/case



Chemical & Physical Properties		
Appearance		
Odor		
Flash Point		
VOC (EPA)		
VOC (CARB)		
Boiling Point		
Density		

Chemical Composition

CHEMICAL NAME	CAS #
Abietic acid and homomorphous mixtures	9/7/8050
(Rosin)	



Techspray - US office, P.O. Box 949, Amarillo, TX 79105-0949, Tel. 806-372-8523, Toll-free 800-858-4043 Fax 806-372-8750, tsales@techspray.com





1813-5F Pro Wick Red #6 Braid - AS 5' 25 units/case





Copper

7440-50-8

Environmental Policy

Techspray is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray products are supported by a global sales, technical and customer services resources.

For additional technical information on this product or other Techspray products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

North America

Techspray P.O. Box 949 Amarillo, TX 79105 800-858-4043 email: tsales@techspray.com Europe ITW Contamination Control BV Saffierlaan 5 2132 VZ Hoofddorp The Netherlands +31 88 1307 400 email: info@itw-cc.com <u>Countries Outside US</u> Call to locate a distributor in your country

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

