68000-105HLF - BergStik®: Unshrouded Header, Through Hole, Single Row, 5 Positions, 2.54 mm Pitch, Vertical, 5.84 mm (0.23 in.) Mating, 2.41 mm (0.095 in.) Tail









Mating Half


- №75915-305LF
- №76341-305LF
- №91601-305LF
- №71607-305LF

Specifications

Genera

General	
Number of contacts (per row)	5
Number of contacts (Total)	5
Number of rows	1
Orientation	Vertical
Packaging	Bulk Packaging
Attachment type (Board)	Through Hole
Series Number	68000
Dimensional	
Length (Mating pin)	5.84 mm (0.23 in.)
Length (Overall pin)	10.8 mm (0.425 in.)
Length (Tail)	2.41 mm (0.095 in.)
Electrical	
Current rating	3 amp Continuous
Resistance (Insulation)	5000 M-ohms
Voltage rating	1500V AC rms
Mechanical	<u> </u>
Retention force	8.88N (2 lbf)
Mounting	<u>'</u>
Retention feature (Board)	No
	Vapor-phase
Solder process	IR Reflow Soldering Processes
	Compatible with Wave

Physical Color (Housing)	Black
Material (Contact)	Phospor Bronze
Material (Housing)	High Temperature Black Thermoplastic
Plating (Contact area)	0.76 μm (30 μin.) Gold or GXT
Plating (Tail)	0.76 μm (30 μin.) Gold or GXT, or Tin
Underplating (Contact)	1.27 µm (50 µin.) Nickel
Flammability rating	UL 94 V-0
Temperature (Range)	-65°C to +125°C
Approvals / Certifications	
UL File Number	E66906
CSA File Number	LR46923
Approvals / Certifications	UL and CSA Approved
Other Features	
Comments	Sample Kit 950501-016
Literature	950559-001

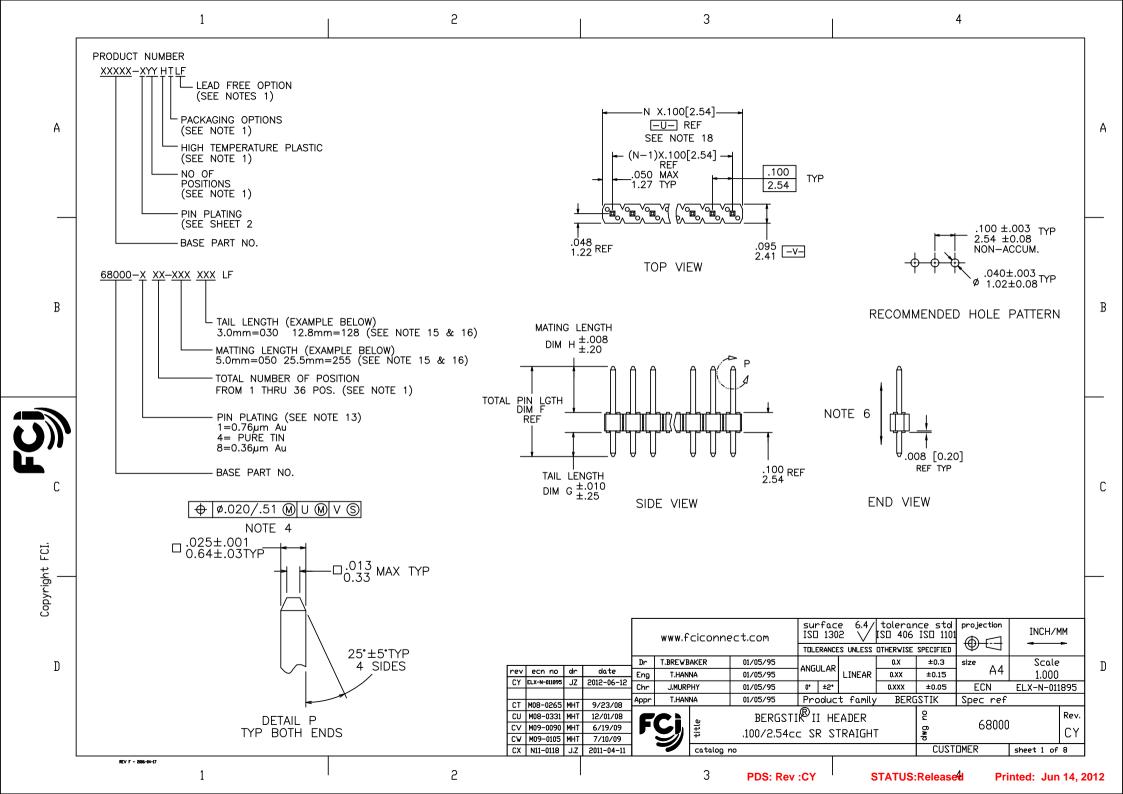

PIN PLA	TING CODES:
XXXXX-1YY	30u"/0.76u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-2YY	15u"/0.38u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-3YY	50u"/1.27u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-4YY	400 "/0 54 NIN O OVER 50 "/4 OT NIN NI (OFF NOTE 44)
XXXXX-4YYHLF	100u"/2.54u MIN Sn OVER 50u"/1.27u MIN Ni (SEE NOTE 14)
XXXXX-5YY	15u"/0.38u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-6YY	30u"/0.76u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-7YY	30u"/0.76u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-8YY	15u"/0.38u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-9YY	15u"/0.38u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni
XXXXX-0YY	30u"/0.76u MIN (SEE NOTE 13) OVER 50u"/1.27u MIN Ni

NOTES

1.) PART NUMBER OPTIONS:

DIN DI ATING CODES

PIN PLATING CODES (SEE ABOVE)

HIGH TEMP. MATERIAL:

PART NUMBERS WITH AND WITHOUT "H" WILL BE SUPPLIED WITH HIGH TEMPERATURE PLASTIC

NUMBER OF POSITIONS:

ANY NUMBER OF POSITIONS FROM 1 THRU 36. -X00H INDICATES BERGSTRIP PRODUCT, SEE PAGE 3 FOR SPECIAL GEOMETRY OF THIS CONTINUOUS STRIP PRODUCT. AUTOMATED REELS WILL CONTAIN 36,000 PINS. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.

PACKAGING:

NO INDICATOR IS STANDARD PACKAGING IN POLY BAGS. EIGHT DIGIT PART NUMBERS FOLLOWED BY A "T" ARE PACKAGED IN TUBES, SEE SPECIFIC PART NUMBERS FOR AVAILABILITY. EIGHT DIGIT PART NUMBERS FOLLOWED BY A "C" ARE PACKAGED IN TUBES WITH PICKUP CAP APPLIED. (NOT TOOLED)

BERGSTRIP™ PART NUMBERS FOLLOWED BY A "B" ARE BULK PRICED. EIGHT DIGIT PART NUMBERS FOLLOWED BY A "A" ARE PACKAGED IN TAPE AND REEL WITH PICKUP CAP APPLIED.

LEAD FREE:

ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE

BODY MATERIAL:

BERGSTIK: MANUFACTURER'S OPTION OF NYLON, PCT GLASS FIBER REINFORCED, OR LCP MINERAL FILLED

FLAME RETARDENT PER UL-94V-0.

COLOR: BLACK

BERGSTRIP™: PRODUCED WITH HIGH TEMPERATURE LCP THERMOPLASTIC, FLAME RETARDENT PER UL-94V-0.

COLOR: BLACK

D

PART NUMBERS WITH AND WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

- . 3.) PIN MATERIAL : PHOS-BRONZE.
- MEASURED WITH PART IN RESTRAINED CONDITION.
- 5. TWO SIDES OF PIN TIPS NOT PLATED. TYPICAL BOTH ENDS.
- 6.) 2LBS/0.9KG MIN PIN RETENTION IN EITHER DIRECTION.
- 7.) PIN CANNOT PROTRUDE PAST EDGE OF HOUSING. MUST BE .005±.005/.13±.13 FROM END OF HOUSING HOLE.
- 8. MILITARY BERGSTIK HEADER P/N XXXXX-XYY-MIL. NOT AVAILABLE.
- $(9.)\pm.010/0.25$ TOL APPLIES TO ALL "G" TAILS EXCEPT INDICATED PARTS ON TABLE WHERE +.010/0.25 -.000/0.00 APPLIES.
- INDICATED PART NUMBERS ARE PRODUCED AND SOLD IN THE TAIWAN/SINGAPORE AREAS. THESE ARE NOT AVAILABLE IN BERGSTRIP™ CONTINUOUS STRIP.
- NOTCH CONFIGURATION WILL VARY PER VENDOR'S DISCRETION.
- THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- PLATING OPTIONS: PERFORMANCE PLATING WILL BE EITHER GOLD OR GXT ON POST OR TAIL, OPTIONALLY (78~295u"/2~7.5u) TIN ON TAIL.
- "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."
- THE OAL DON'T EXCEED 34.5mm
- (16), INCREMENTS BY 0.1mm IN LENGTHS ONLY
- 17. FOR SPECIAL PACKAGING REQUEST PLEASE CONTACT PRODUCT MANAGER FOR AVAILABILITY
- TO DETERMINE DIMENSIONS: N=NUMBER OF POSITION PER ROW EXAMPLE: 10 POS. N X .100/2.54

www.fciconnect.com					fac 130 RANCE	ē 🗸	tolerar ISO 406 OTHERWISE	ISO 1101	projection	INCH/M	_ ₹
Dr	T.BREW	BAKER	01/05/95	ANC	II AD		0.X	±0.3	size	Scale	,
Eng	T.HAI	NNA	01/05/95	ANGULAR	LINEAR	0.XX	±0.15	A4	1.000	J	
Chr	J.MUR	RPHY	01/05/95	0*	±2*		0.XXX	±0.05	ECN	ELX-N-011	1895
Appr	Appr T.HANNA 01/05/95					Product family BERG			Spec ref		
DEDECTION OF THE ABED											D



BERGSTIK II HEADER .100/2.54cc SR STRAIGHT


Rev 68000 CUSTOMER sheet 2 of 8


catalog no

STATUS:Released

Printed: Jun 14, 2012

PDS: Rev :CY

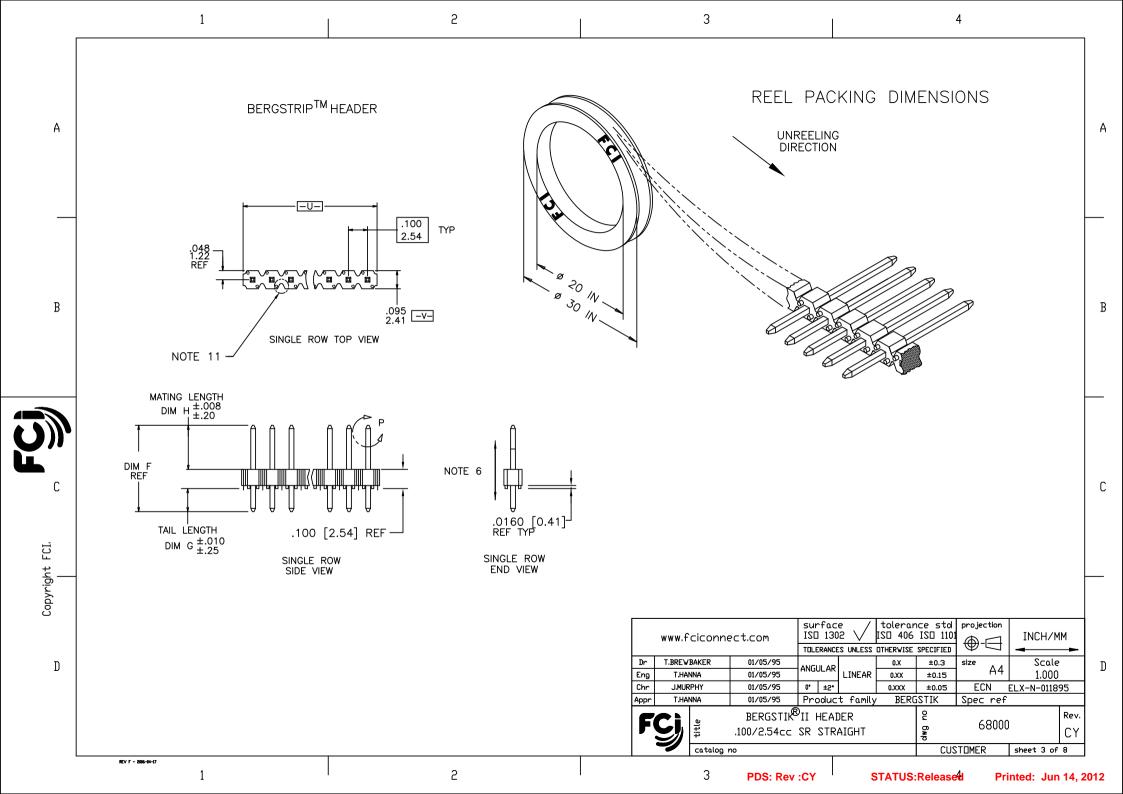

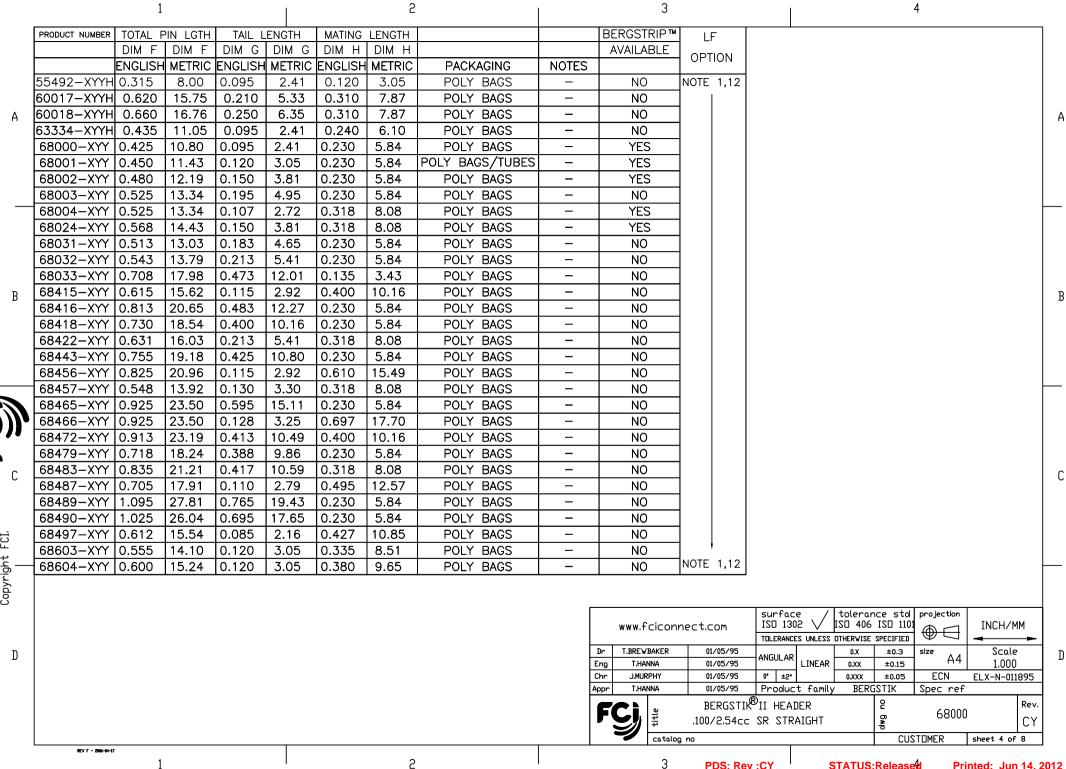


STATUS:Released


PDS: Rev :CY

Printed: Jun 14, 2012

		1					2	1		3		4		
	PRODUCT NUMBER	TOTAL F	PIN LGTH	TAIL L	.ENGTH	MATING	LENGTH			BERGSTRIP™	l LF l			
		DIM F	DIM F	DIM G	DIM G	DIM H	DIM H			AVAILABLE				
		ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	PACKAGING	NOTES		OPTION			
	68629-XYY	0.621	15.77	0.203	5.16	0.318	8.08	POLY BAGS	_	NO	NOTE 1,12			
	68630-XYY	0.603	15.32	0.273	6.93	0.230	5.84	POLY BAGS	_	NO	1 1			
Α	68631-XYY	0.703	17.86	0.203	5.16	0.400	10.16	POLY BAGS	_	NO	1			Α
	68632-XYY	0.743	18.87	0.413	10.49	0.230	5.84	POLY BAGS	_	NO	1			
	68633-XYY	0.643	16.33	0.225	5.72	0.318	8.08	POLY BAGS	_	NO	1			
	68634-XYY	1.013	25.73	0.683	17.35	0.230	5.84	POLY BAGS	_	NO	1			
	68642-XYY	0.913	23.19	0.583	14.81	0.230	5.84	POLY BAGS	_	NO	1			
-	68652-XYY	1.470	37.34	0.670	17.02	0.700	17.78	POLY BAGS	_	NO]		-	_
	68653-XYY	0.735	18.67	0.095	2.41	0.540	13.72	POLY BAGS	_	NO				
	68654-XYY	1.050	26.67	0.670	17.02	0.280	7.11	POLY BAGS	_	NO]			
	68655-XYY	0.708	17.98	0.290	7.37	0.318	8.08	POLY BAGS	_	NO]			
	68656-XYY	1.113	28.27	0.613	15.57	0.400	10.16	POLY BAGS	_	NO				
В	68657-XYY	0.588	14.94	0.368	9.35	0.120	3.05	POLY BAGS	_	NO]			В
	68658-XYY	0.820	20.83	0.130	3.30	0.590	14.99	POLY BAGS	_	NO				
	68659-XYY	0.608	15.44	0.398	10.11	0.110	2.79	POLY BAGS	_	NO				
	68686-XYY	1.016	25.81	0.458	11.63	0.458	11.63	POLY BAGS	_	NO				
	68689-XYY	0.913	23.19	0.213	5.41	0.600	15.24	POLY BAGS	_	NO				
	68705-XYY	0.395	10.03	0.095	2.41	0.200	5.08	POLY BAGS	_	NO			-	—
	68717-XYY	0.615	15.62	0.285	7.24	0.230	5.84	POLY BAGS	_	NO				
יוונ	68730-XYY	0.555	14.10	0.225	5.72	0.230	5.84	POLY BAGS	_	NO				
	68731-XYY	0.880	22.35	0.440	11.18	0.340	8.64	POLY BAGS	_	NO]			
	68735-XYY	1.016	25.81	0.520	13.21	0.396	10.06	POLY BAGS	_	NO	<u> </u>			
С	68755-XYY	1.166	29.62	0.533	13.54	0.533	13.54	POLY BAGS	_	NO]			С
	68760-XYY	0.803	20.40	0.353	8.97	0.350	8.89	POLY BAGS	_	NO]			
	68762-XYY	0.588	14.94	0.213	5.41	0.275	6.99	POLY BAGS	_	NO	<u> </u>			
∺	68771-XYY	0.470	11.94	0.100	2.54	0.270	6.86	POLY BAGS	_	NO	<u> </u>			
FCL	68781-XYY	0.691	17.55	0.273	6.93	0.318	8.08	POLY BAGS	_	NO	NOTE 1,12			
Copyright 														—
										ciconnect.com		NLESS OTHERWISE SPECIFIED	ICH/MM	
D									Dr T.BREWE Eng T.HAN Chr J.MURF	NA 01/05/95 PHY 01/05/95	ANGULAR LIN		Scale 1.000 -N-011895	D
									Appr T.HAN		<u> Product f</u> TIK [®] II HEADER		Rev.	
									FCj	∄ .100/2.54	cc SR STRAIGH	HT 8 68000	CY	
	REV F - 2006-04-17									catalog no		CUSTOMER shee	t5 of 8	
		1					2			3 PDS : F	Rev :CY	STATUS:Released Printed	: Jun 14, 20	012

		1		1			2			3		4	
	PRODUCT NUMBER	TOTAL P	IN LGTH	TAIL L	.ENGTH	MATING	LENGTH			BERGSTRIP™	LF I]
		DIM F	DIM F	DIM G	DIM G	DIM H	DIM H			AVAILABLE	1 - 1		
		ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	PACKAGING	NOTES		OPTION		
	68795-XYY		12.70	0.062	1.57	0.338	8.59	POLY BAGS	_	NO	NOTE 1,12		
	68796-XYY	0.633	16.08	0.423	10.74	0.110	2.79	POLY BAGS	_	NO	1		
Α	68797-XYY	0.413	10.49	0.213	5.41	0.100	2.54	POLY BAGS	-	NO	1		A
	69148-XYY	0.442	11.43	0.000	0.00	0.350	8.89	POLY BAGS	-	NO	1		
	69152-XYY	0.720	18.29	0.120	3.05	0.500	12.70	POLY BAGS/TUBES	_	NO	1		
	69173-XYY	0.530	13.46	0.135	3.43	0.295	7.49	POLY BAGS	-	NO	1		
	69188-XYY	0.751	19.08	0.333	8.46	0.318	8.08	POLY BAGS	_	NO]		
-	69751-XYY	0.440	11.18	0.170	4.32	0.170	4.32	POLY BAGS	NOTE 10	NO		· ·	
	71417-XYY	0.664	16.87	0.115	2.92	0.449	11.40	POLY BAGS	NOTE 10	NO			
	72260-XYYH	0.930	23.62	0.090	2.29	0.740	18.80	POLY BAGS	-	NO			
	72323-XYYH	1.200	30.48	0.100	2.54	1.000	25.40	POLY BAGS	-	NO			
	72457-XYYH	1.100	27.94	0.090	2.29	0.910	23.11	POLY BAGS	1	NO			
В	73698-XYYH	1.100	27.94	0.120	3.05	0.880	22.35	POLY BAGS	1	NO			В
	74464-XYYH	1.028	26.11	0.610	15.49	0.318	8.08	POLY BAGS	-	NO			
	78240-XYY	0.663	16.84	0.333	8.46	0.230	5.84	POLY BAGS	1	NO			
	78287-XYY	0.678	17.22	0.120	3.05	0.458	11.63	POLY BAGS	ı	NO			
	78290-XYY	1.250	31.75	0.500	12.70	0.650	16.51	POLY BAGS	ı	NO			
	78511-XYY	0.538	13.67	0.120	3.05	0.318	8.08	POLY BAGS/TUBES	1	YES			
	78595-XYY		NO	AVAILAI	BLE				1	-			
יוונ	78931-XYY		NO	AVAILAI	BLE				ı	_			
	78958-XYY		NO	AVAILAI	BLE				1	_			
	78959-XYY		NO	AVAILAI	BLE				1	-			
С	78977-XYY		NO	AVAILAI	BLE				1	-			C
	78998-XYY	0.430	10.92	0.155	3.94	0.175	4.45	POLY BAGS	ı	NO			
	78999-XYY		NO	AVAILAI	BLE				ı	_			
ıi	79428-XYY	0.695	17.65	0.120	3.05	0.475	12.07	POLY BAGS	1	NO] '		
FCI	79849-XYY	0.620	15.75	0.120	3.05	0.400	10.16	POLY BAGS	ı	NO	NOTE 1,12		
Copyright 													
										iconnect.com		tolerance std projection INCH/MM ESS OTHERVISE SPECIFIED INCH/MM	
D									Dr T.BREWB Eng T.HAN Chr J.MURF Appr T.HAN	NA 01/05/95 PHY 01/05/95	ANGULAR LINE	0.XXX ±0.05 ECN ELX-N-011895	D
									FC)	BERGS	rik [®] II HEADER CC SR STRAIGH	2 49000 Rev.	<u> </u>
										catalog no		CUSTOMER sheet 6 of 8	<u> </u>
	REV F - 2006-04-17	1					2			2			
		1		'			2	ı		3 PDS : F	Rev :CY	STATUS:Released Printed: Jun 14, 2	2012

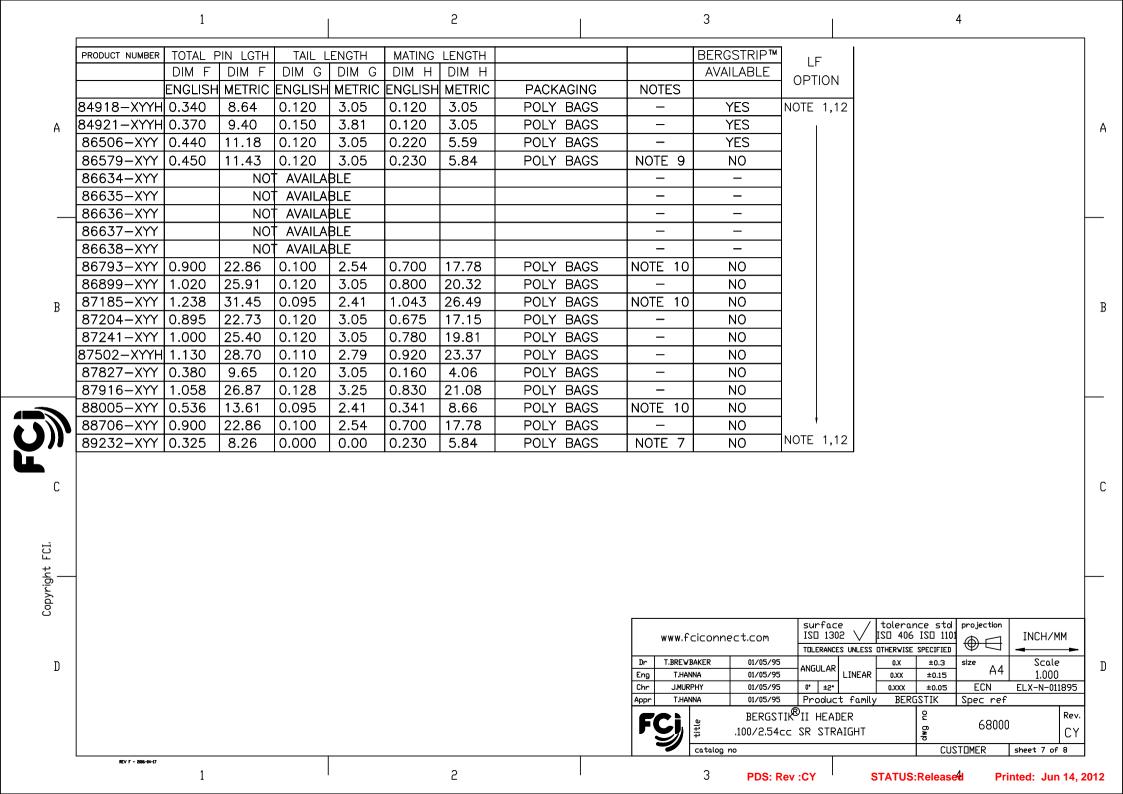

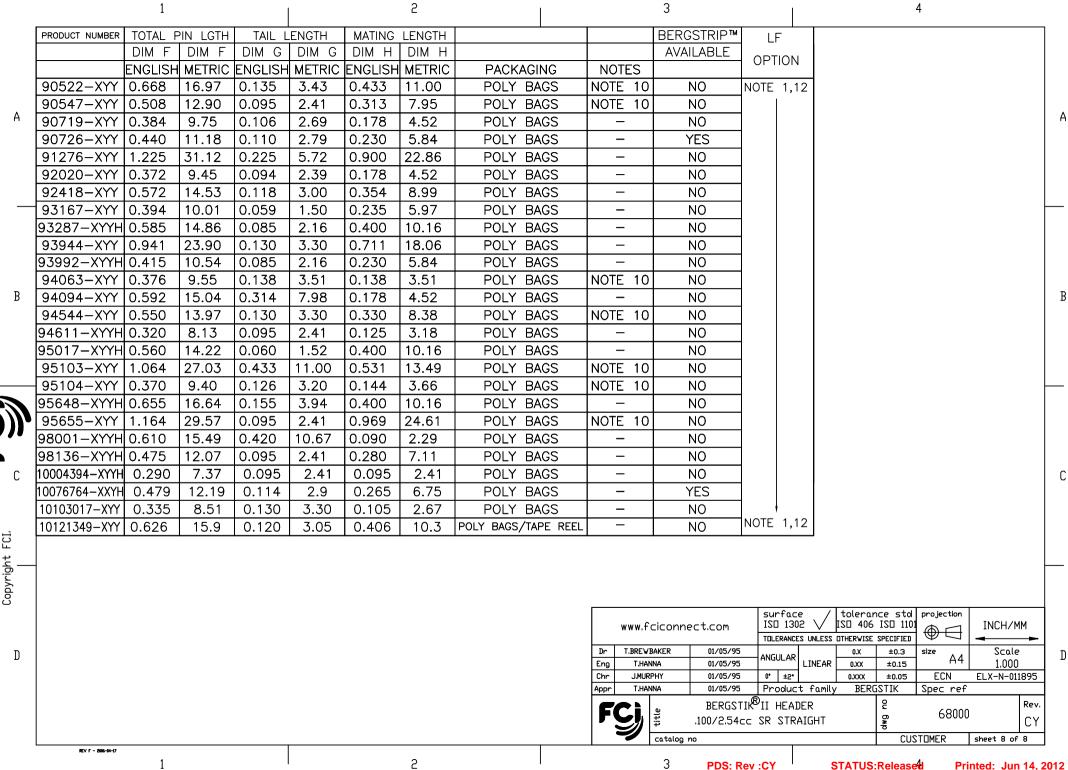

STATUS:Released Printed: Jun 14, 2012