

Automation Technology > Power supplies > Power supply SITOP > Uninterruptible power supplies 24 V DC > DC UPS with battery modules

6EP1935-6MC01 SITOP BATTERY MODULE 24 V/1.2 AH

Technical / CAx data

Technical Data CAx data



SITOP BATTERY MODULE 24 V/1.2 AH WITH SERVICE-FREE SEALED LEAD-ACID BATTERIES FOR SITOP DC UPS MODULE 6 A

Technical specifications

Product	SITOP Battery module
Product type	Battery module 1.2 Ah
Type of battery	maintenance-free lead-acid batteries

Charging current

End of charging voltage / for DC

• at 10 °C / recommended	27.8 V
• at 20 °C / recommended	27.3 V
• at 30 °C / recommended	26.8 V
• at 40 °C / recommended	26.6 V
• at 50 °C / recommended	26.3 V

charging current / maximum 0.3 A

Safety

Design of the short-circuit protection Battery fuse 7.5 A/32 V (solid-state circuitry blade-type fuse + support)

Design of the overload protection Valve control

Safety

Protection class Class III

CE mark Yes


UL/cUL (CSA) approval cURus-Recognized (UL 1778, CSA C22.2 No. 107.1), File E219627

Protection class IP IP00

Operating data

- note For storage, mounting and operation of lead-acid batteries, the relevant DIN/VDE regulations or country-specific regulations (e.g. VDE 0510 Part 2/EN 50272-2) must be observed. You must ensure that the battery site is sufficiently ventilated. Possible sou

Ambient temperature	
<ul style="list-style-type: none"> • in operation • on transport • in storage 	<p>-15...+50 °C</p> <p>-20...+50 °C</p> <p>-20...+50 °C</p>
Relative, temporary capacity loss / at 20 °C / in a month / typical	3 %
Service life	
Service life of lead-acid battery	
<ul style="list-style-type: none"> • typical / note • at 20 °C / typical • at 30 °C / typical • at 40 °C / typical • at 50 °C / typical 	<p>capacity falls to 50 % of original capacity</p> <p>4 a</p> <p>2 a</p> <p>1 a</p> <p>0.5 a</p>
Mechanics	
Connection technology	spring-loaded terminals
Design of the electrical connection	1 screw terminal each for 0.08 ... 2.5 mm ² for + BATT and - BATT
Product component / belonging to	Accessories pack with solid-state circuitry fuse 7.5 A
Width / of the housing	96 mm
Height / of the housing	106 mm
Depth / of the housing	108 mm
Installation width	116 mm
Mounting height	126 mm
Net weight	1.8 kg
Installation	snaps onto DIN rail EN 60715 35x7.5/15 or keyhole mounting for hooking in to M4 screws
Number of cells	12
Other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

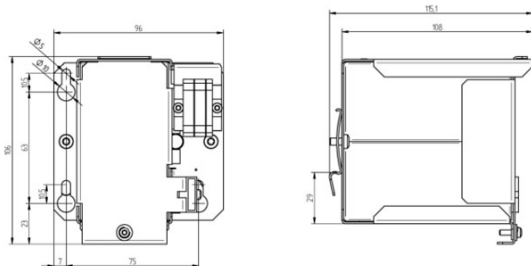

letzte Änderung:

May 14, 2012

© Siemens AG 2012 - Corporate Information - Privacy Policy - Terms of Use