






LOC		DIST	REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD
	B	REVISED PER ECR-15-002599		13MAR2015	NK	GJ

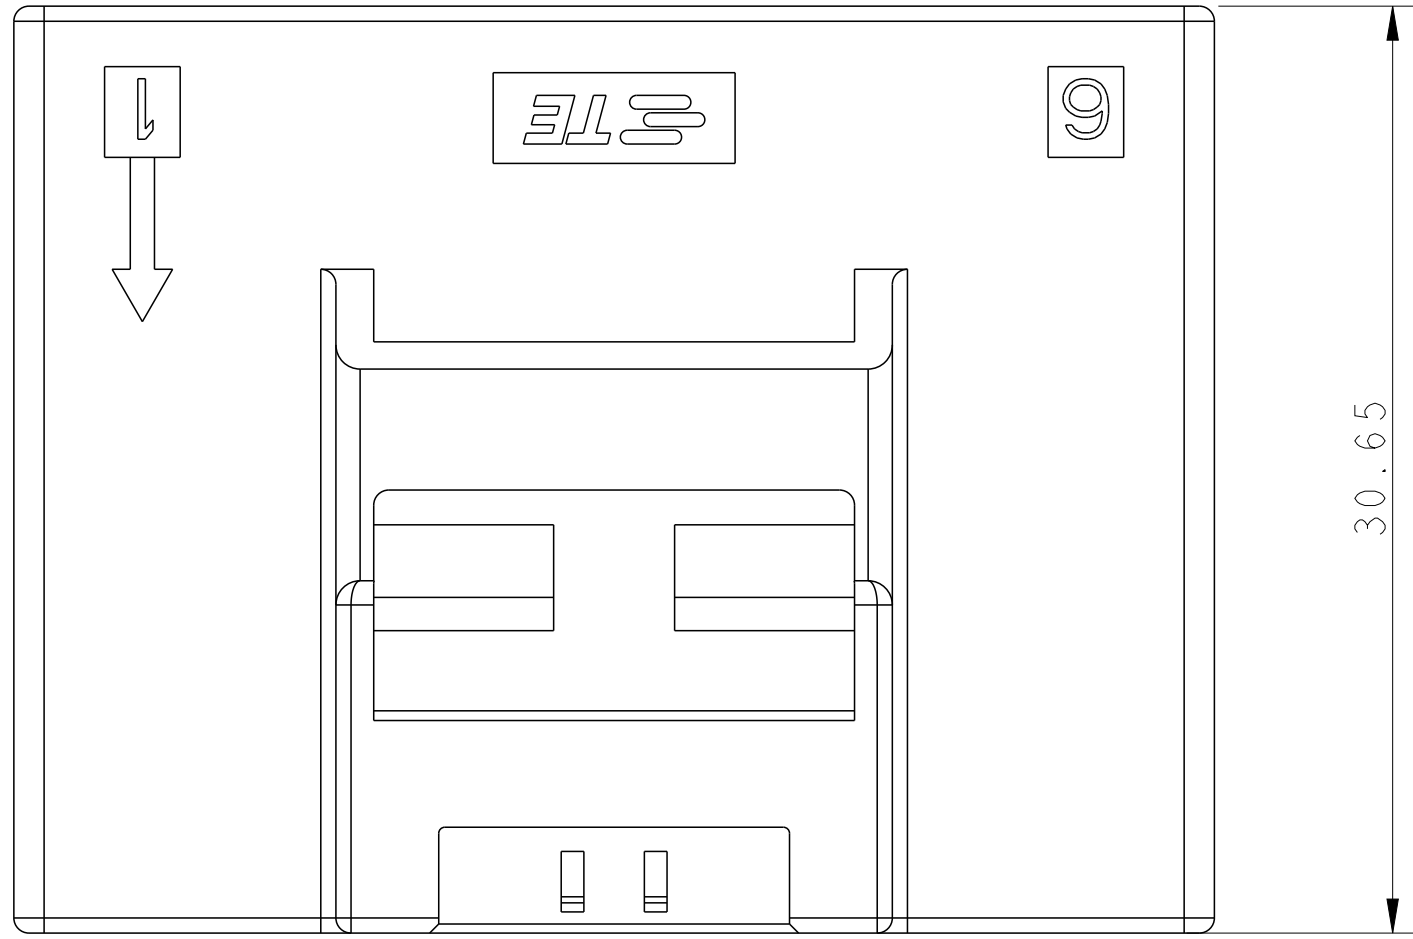

- ⚠ MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW
- LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:LIGHT GREY; KEY D:LIGHT GREY
- ⚠ MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*
- 4 MATING CONN, P/N
PLUG HSG:*-1971776-
TPA(LOCK PLATE):*-1971778-*



5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

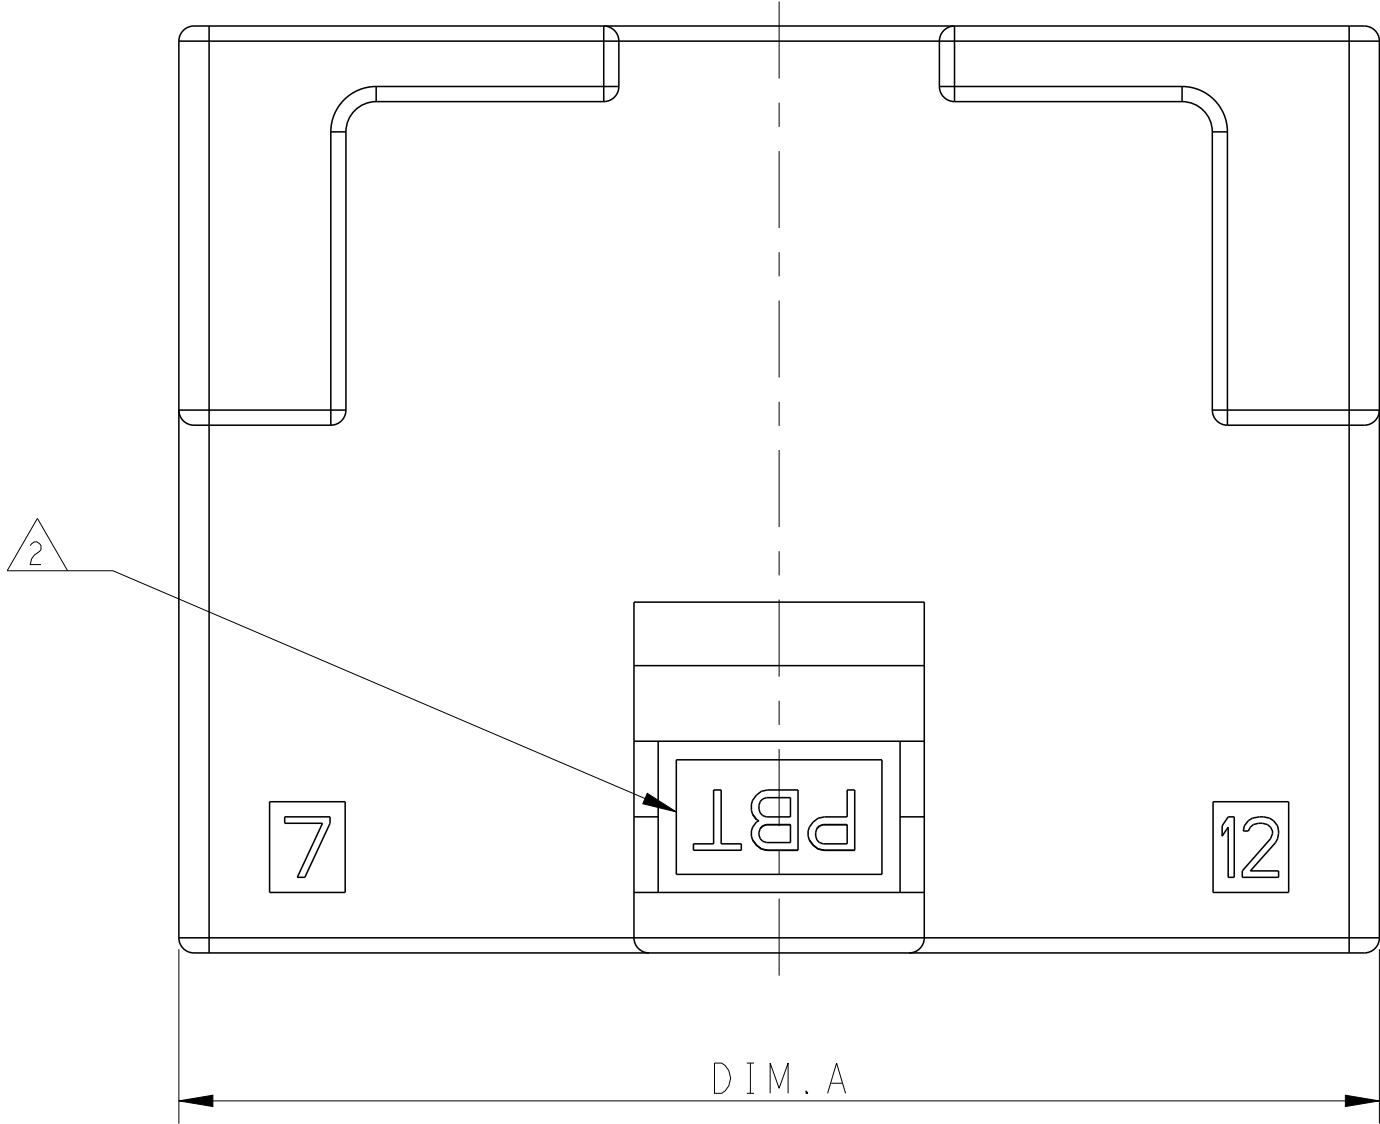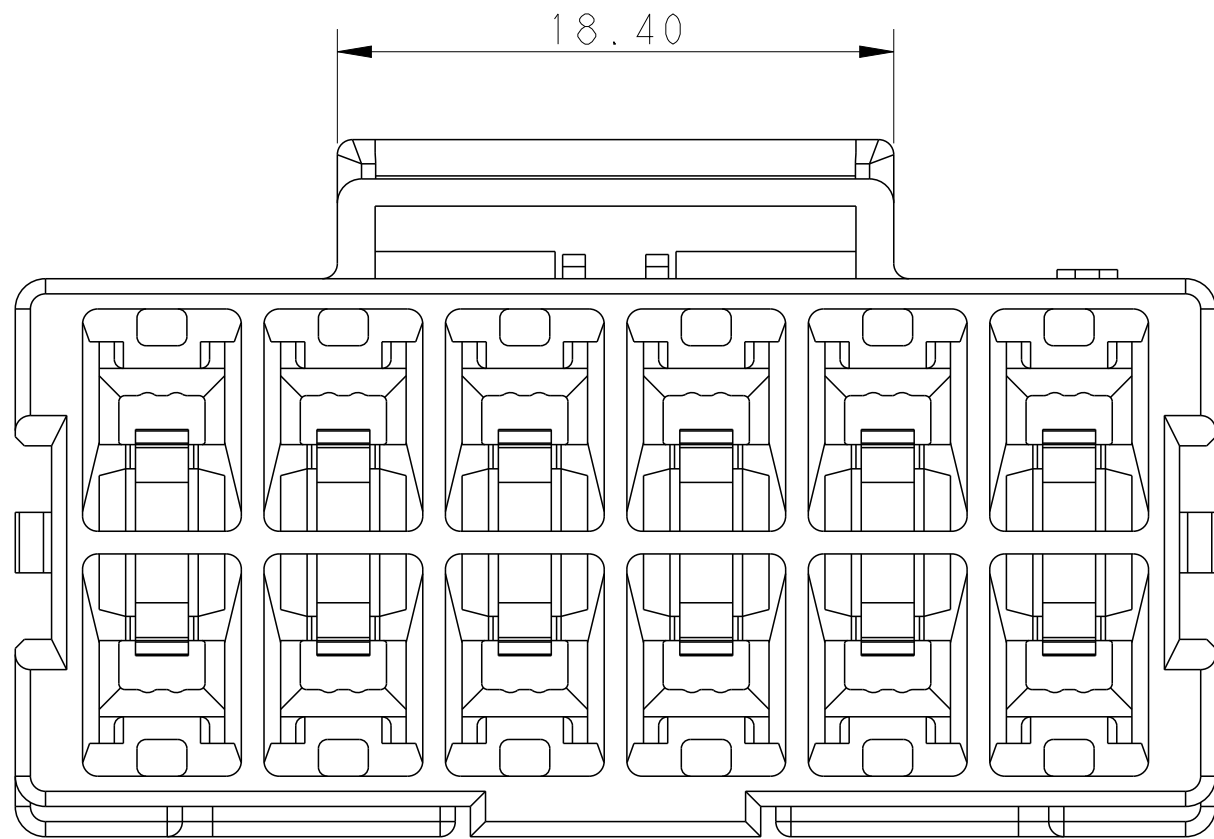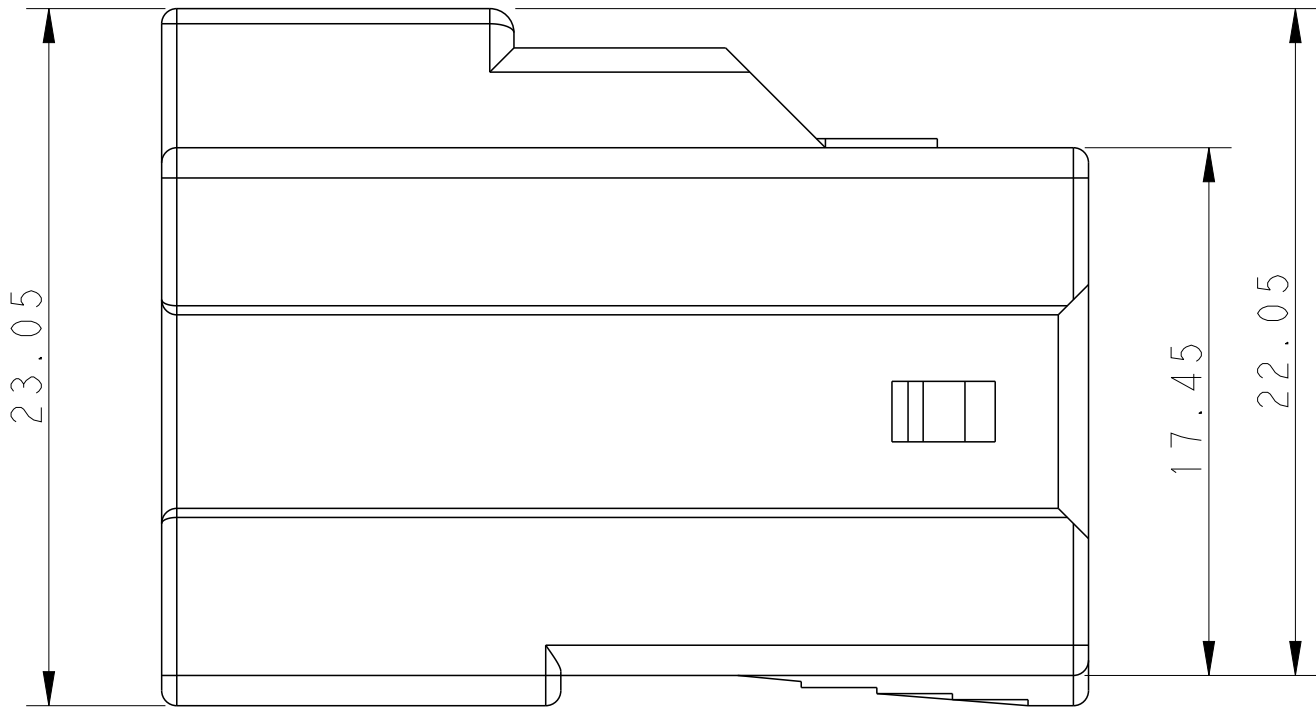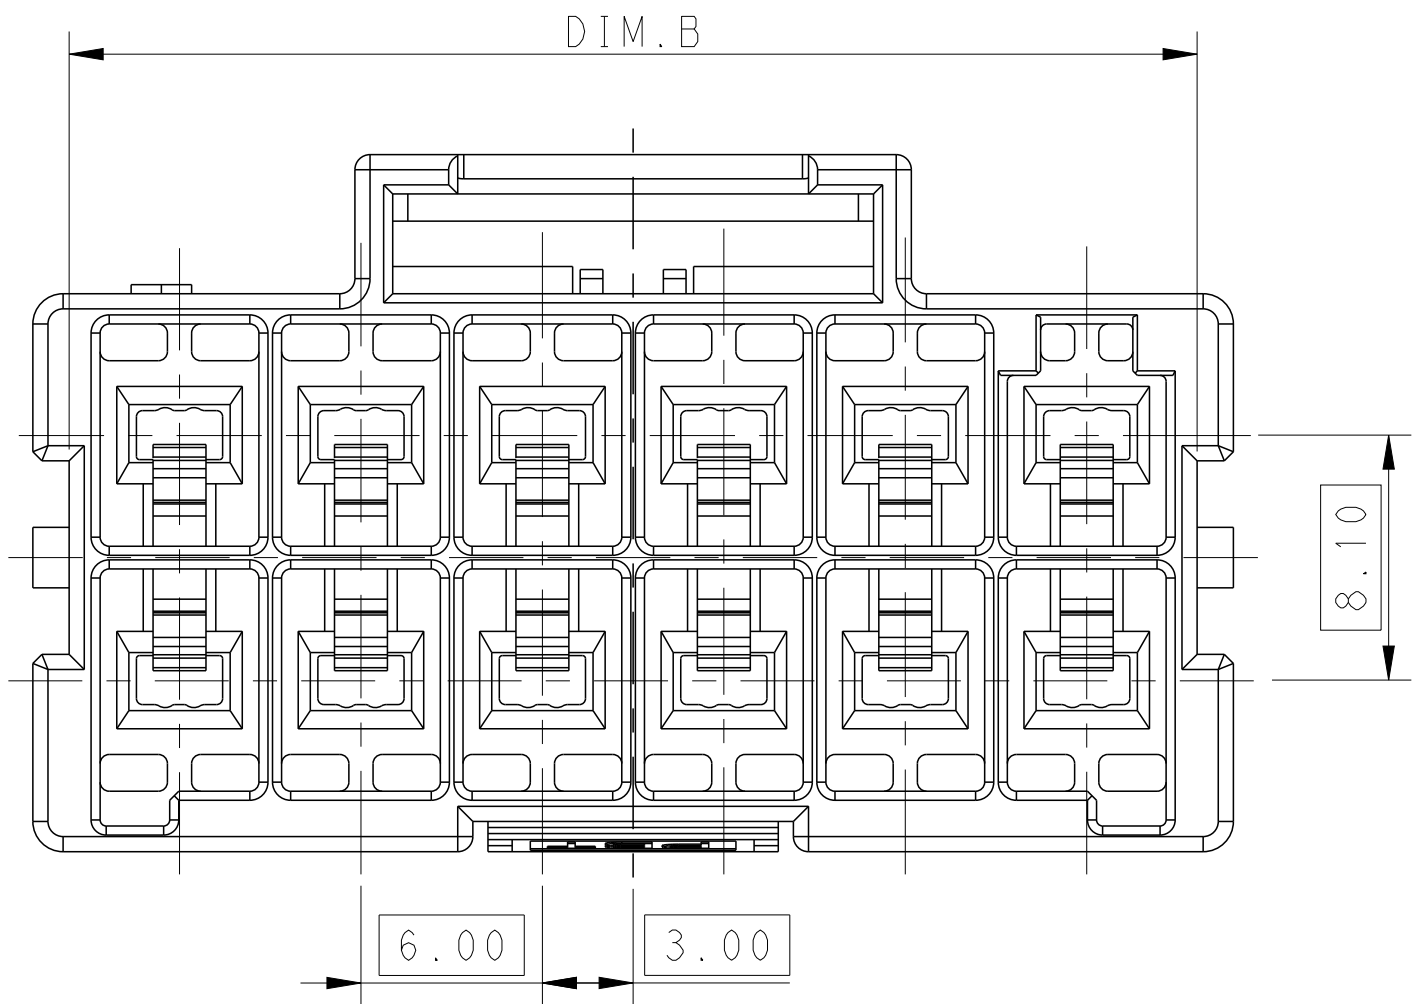



POS.	DIM.A	DIM.B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity			
DIMENSIONS:		CHK HAPYE WU 09JUL2012				
mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD YUHONG MAO 09JUL2012	NAME	CAP HOUSING,FREE HANGING,DOUBLE ROW POWER TRIPLE LOCK		
	0 PLC ±:	PRODUCT SPEC				
	1 PLC ±0.35	108-106118				
	2 PLC ±0.25	APPLICATION SPEC				
	3 PLC ±:	114-106118				
4 PLC ±:	ANGLES ±:		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	A100779C=1971774			
		Customer Drawing	SCALE	SHEET	1 OF 2	REV B



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

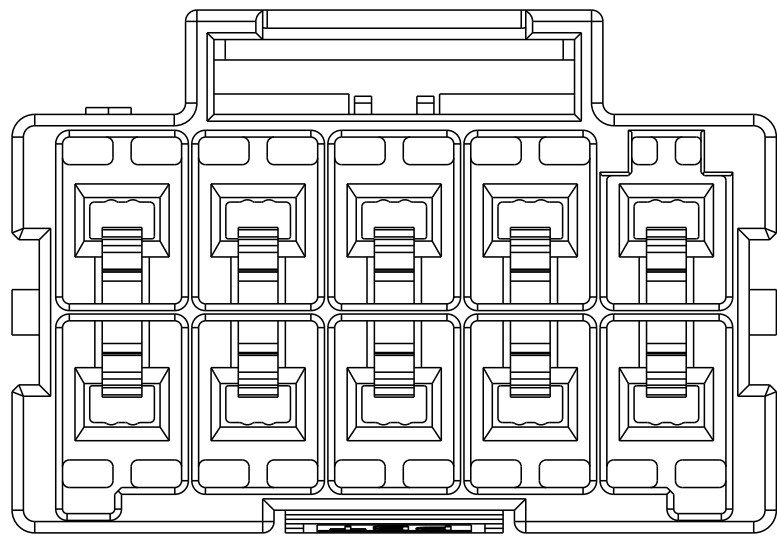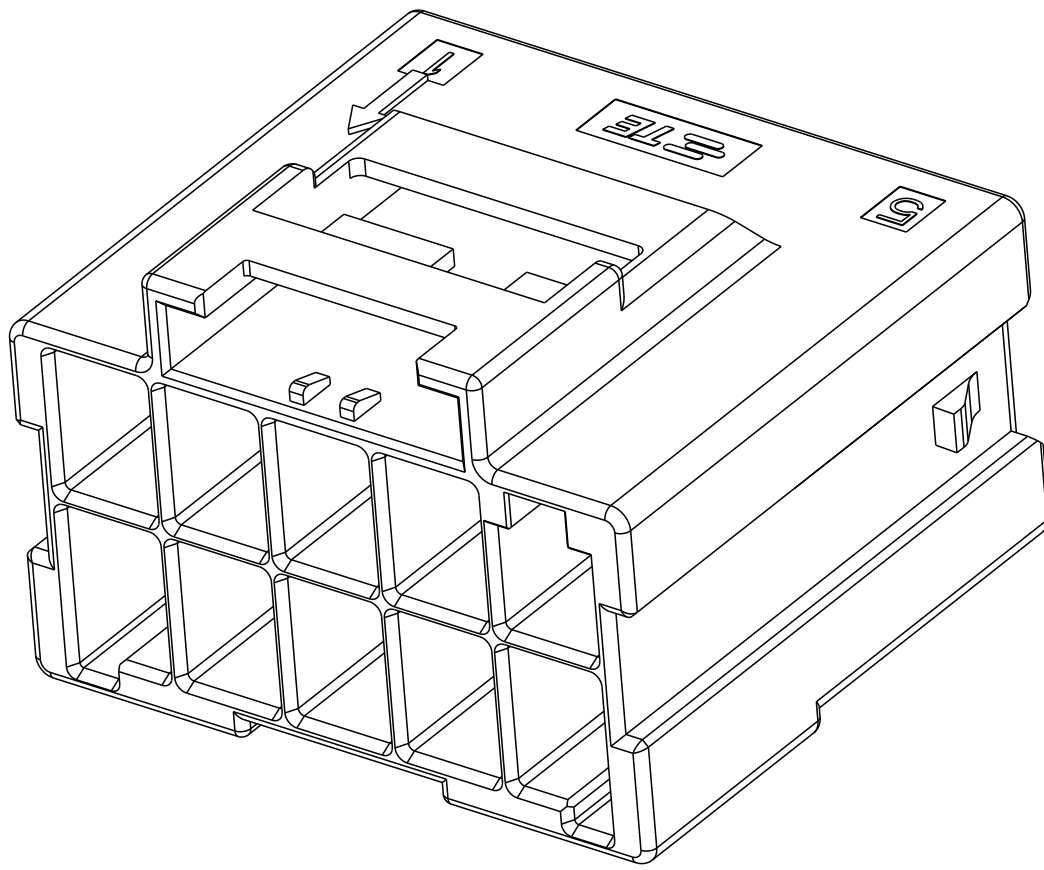


2*5 POSITIONS

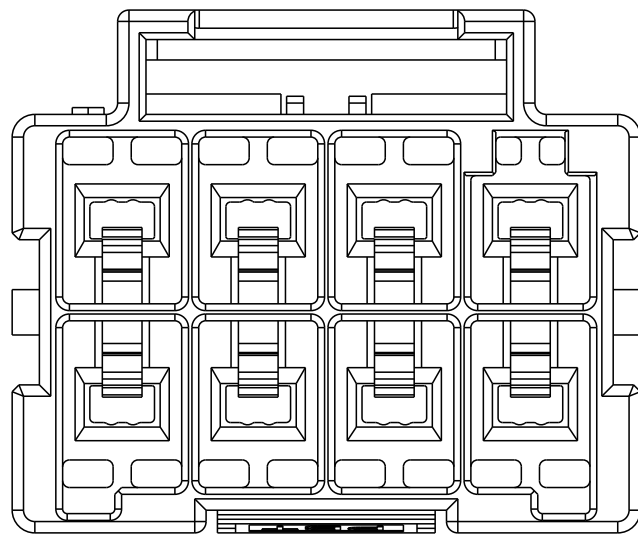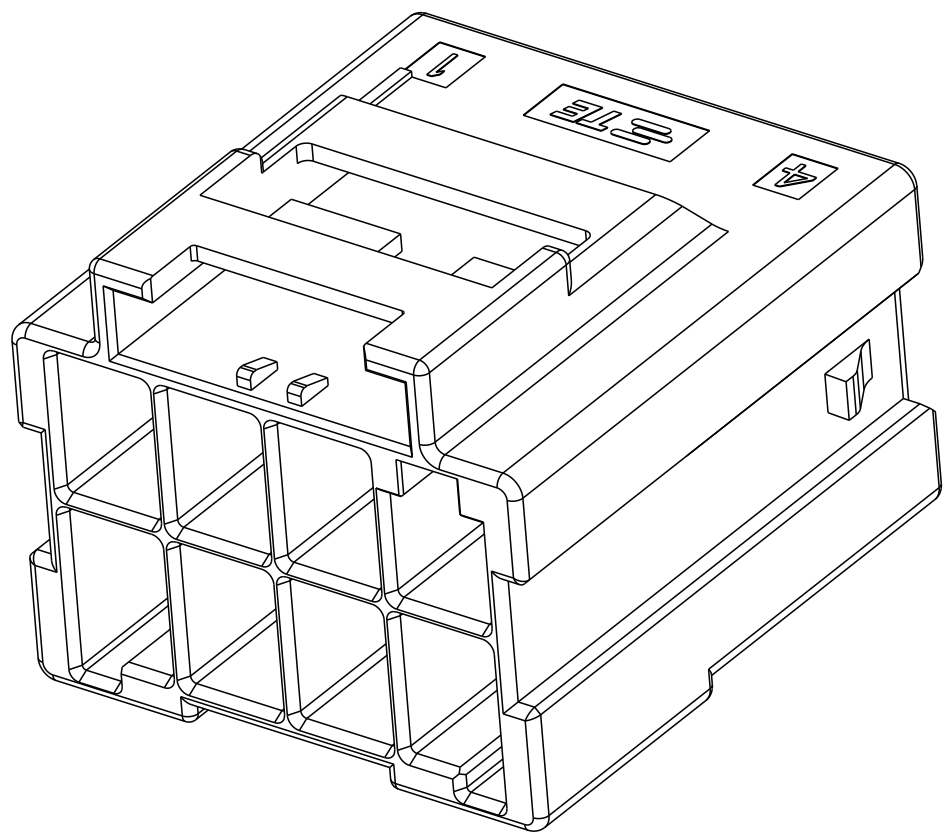


2*4 POSITIONS

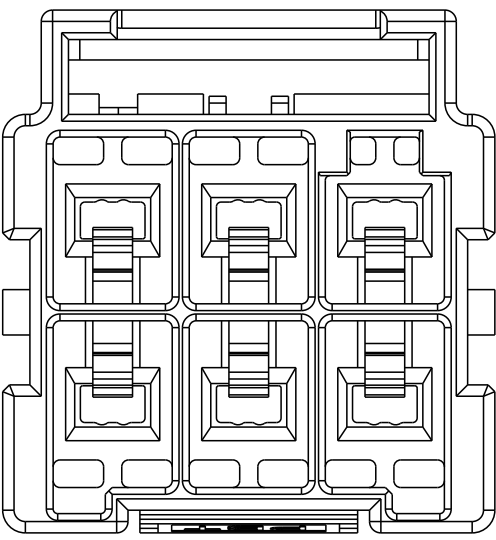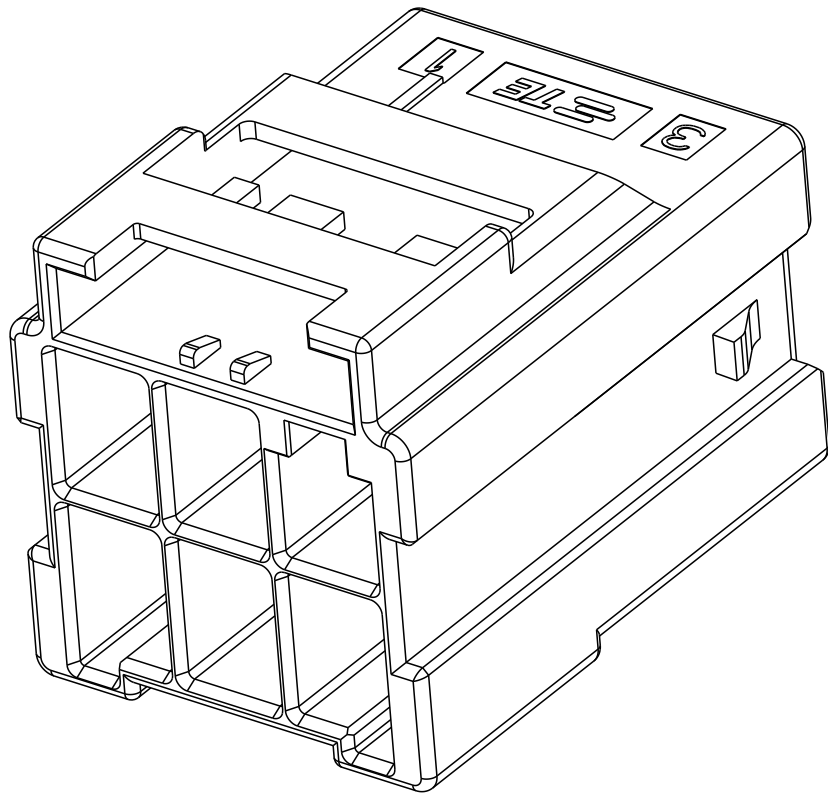


2*3 POSITIONS

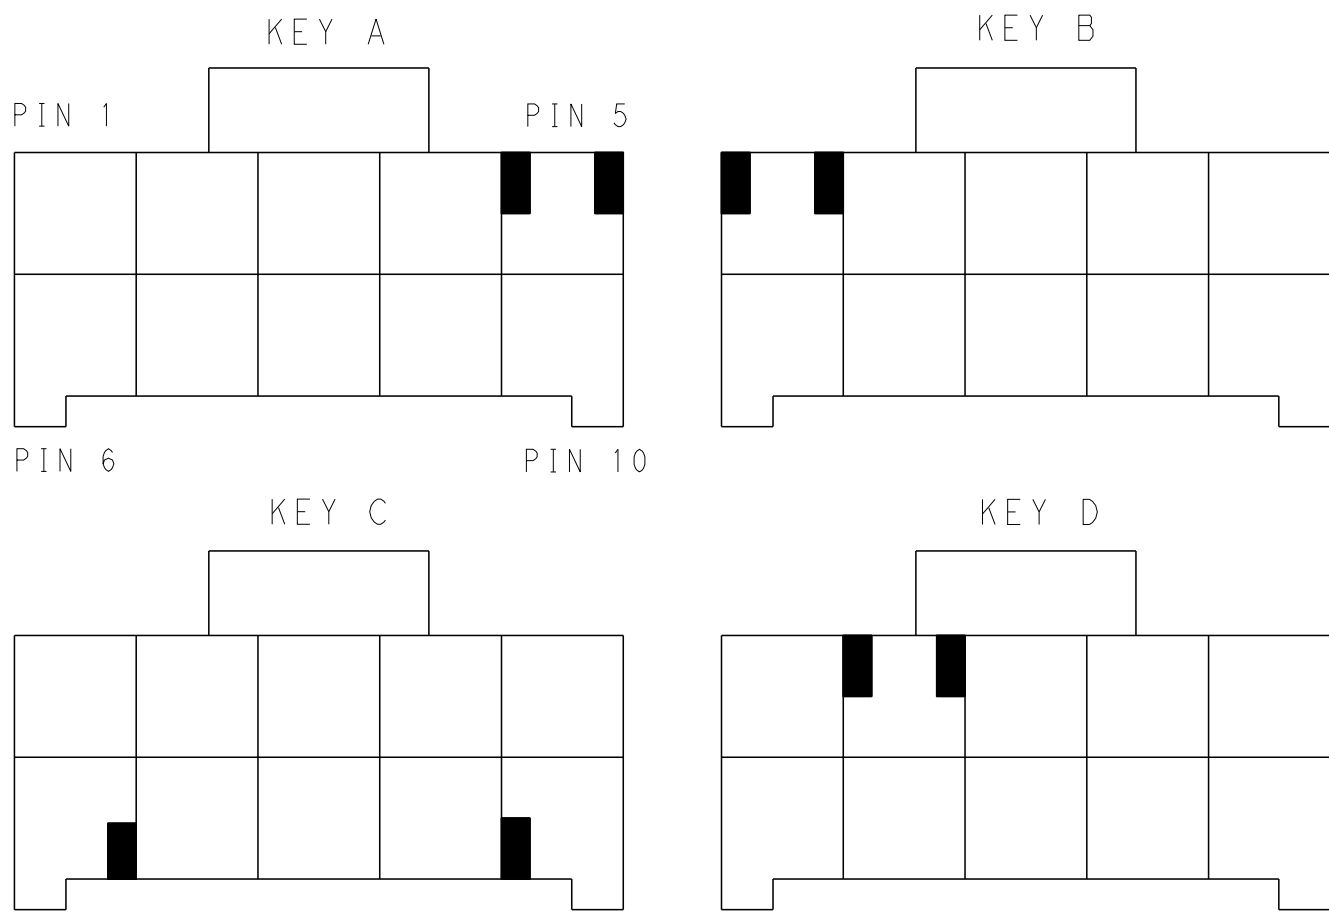



KEYING FOR 2*5 POS.

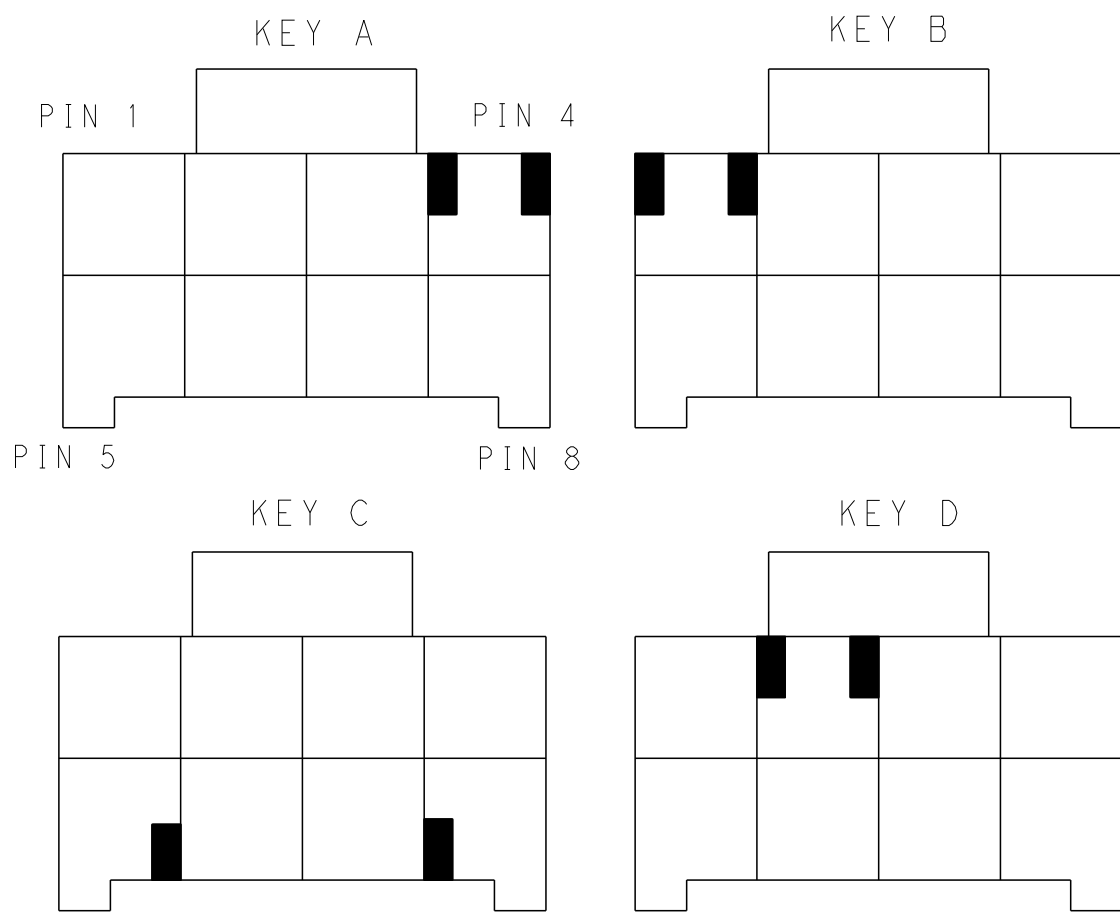


KEYING FOR 2*4 POS.

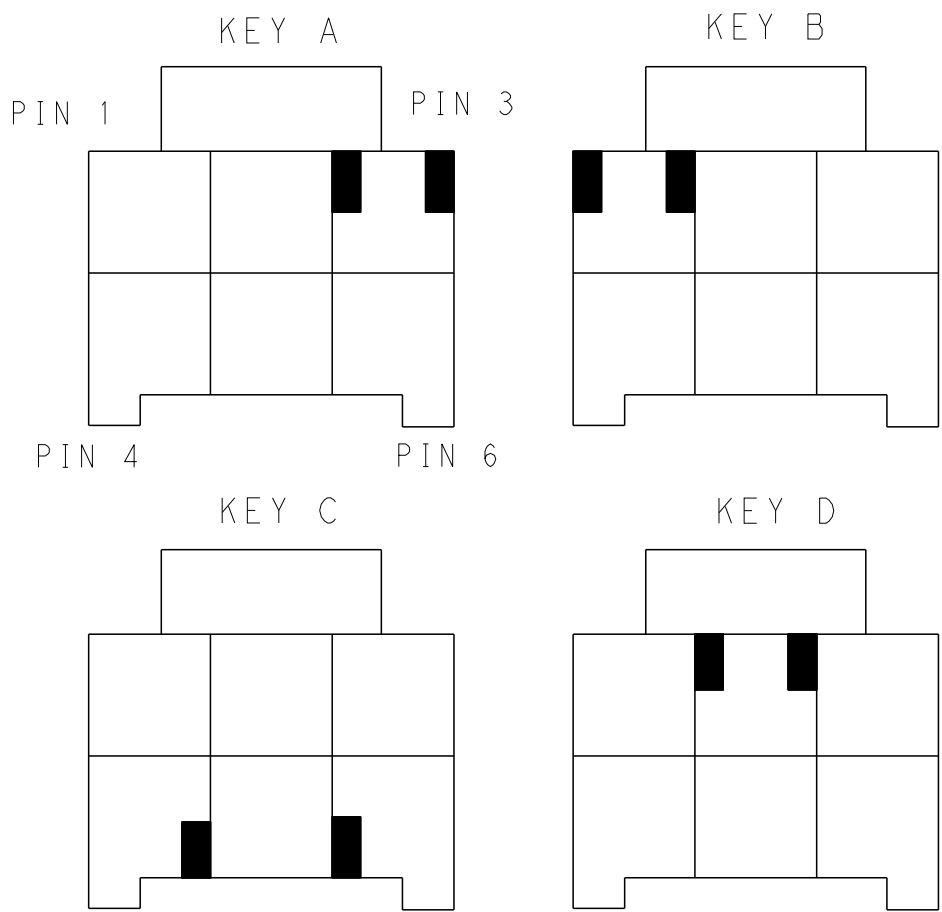

KEYING FOR 2*3 POS.

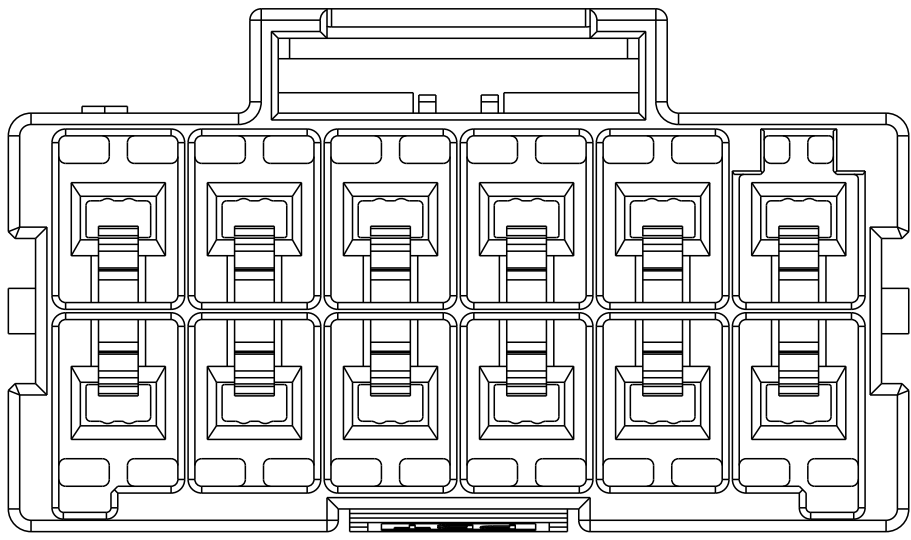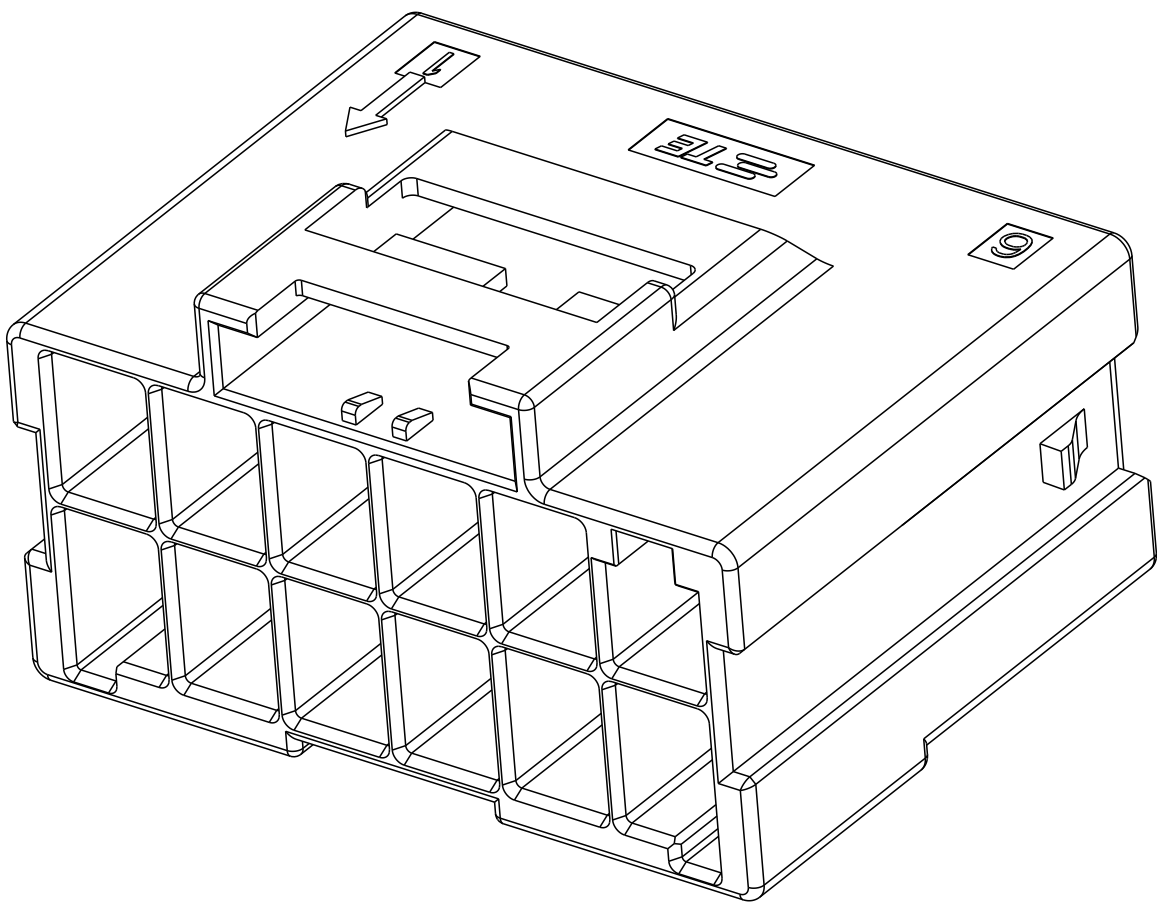

2*6 POSITIONS

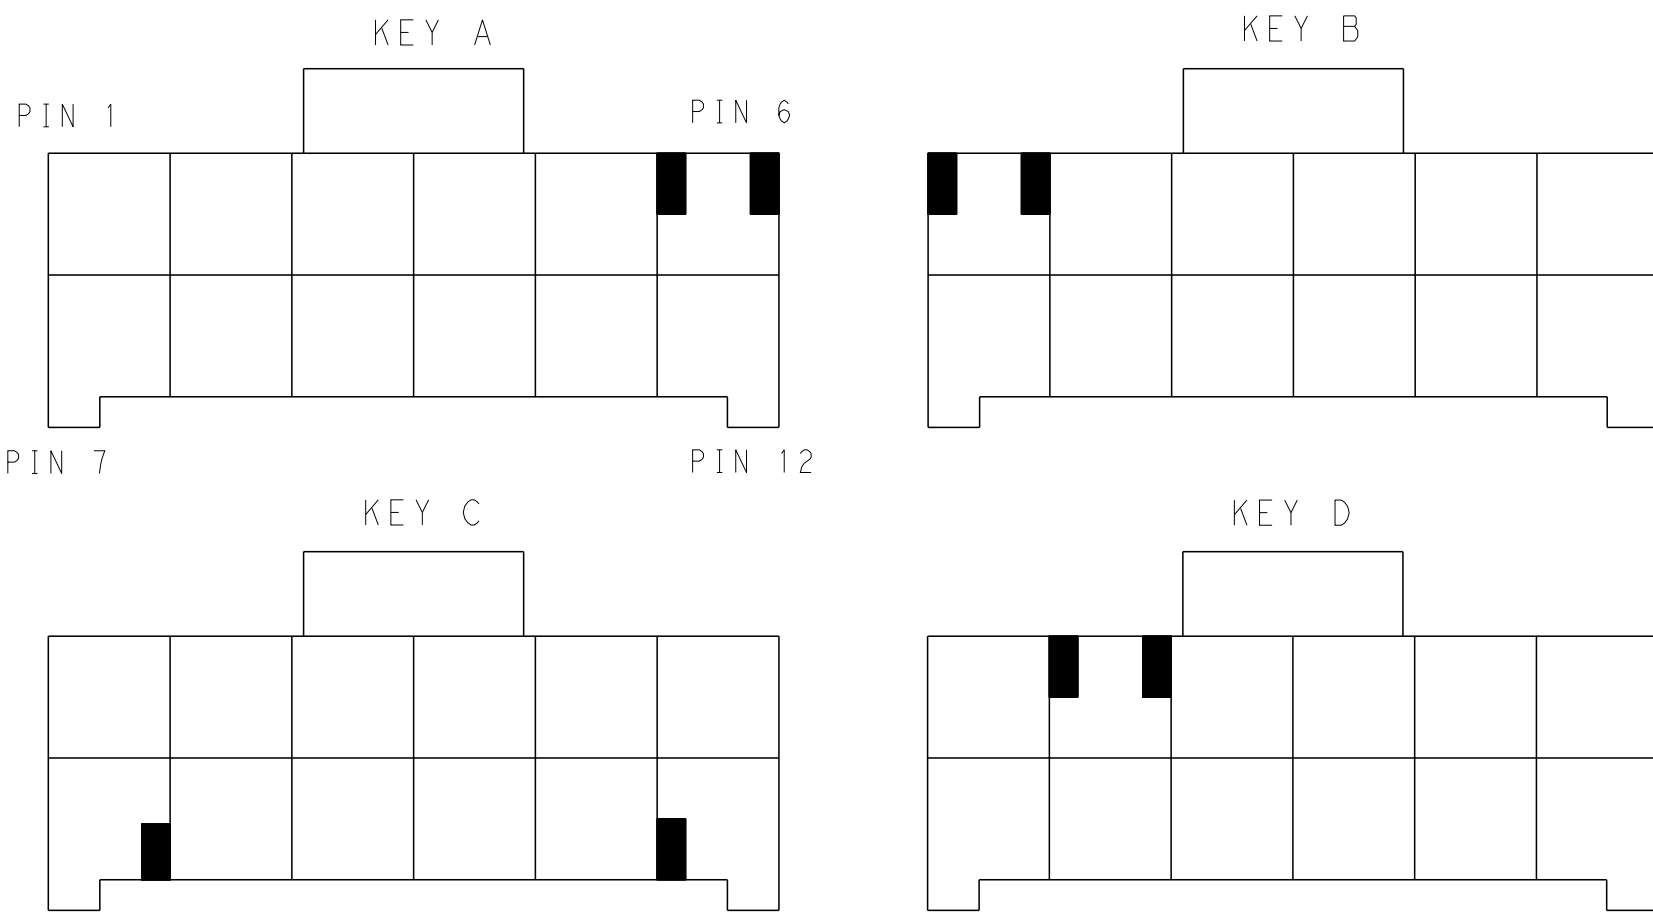

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971774-6
		KEY B	2-1971774-6
		KEY C	3-1971774-6
		KEY D	4-1971774-6
2*5	LEVEL 2	KEY A	5-1971774-6
		KEY B	6-1971774-6
		KEY C	7-1971774-6
		KEY D	8-1971774-6
2*4	LEVEL 1	KEY A	1-1971774-5
		KEY B	2-1971774-5
		KEY C	3-1971774-5
		KEY D	4-1971774-5
2*3	LEVEL 2	KEY A	5-1971774-5
		KEY B	6-1971774-5
		KEY C	7-1971774-5
		KEY D	8-1971774-5
POS.	MATERIAL	KEY	P/N

2*6	LEVEL 1	KEY A	1-1971774-4
		KEY B	2-1971774-4
		KEY C	3-1971774-4
		KEY D	4-1971774-4
2*5	LEVEL 2	KEY A	5-1971774-4
		KEY B	6-1971774-4
		KEY C	7-1971774-4
		KEY D	8-1971774-4
2*4	LEVEL 1	KEY A	1-1971774-3
		KEY B	2-1971774-3
		KEY C	3-1971774-3
		KEY D	4-1971774-3
2*3	LEVEL 2	KEY A	5-1971774-3
		KEY B	6-1971774-3
		KEY C	7-1971774-3
		KEY D	8-1971774-3
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY WU 09JUL2012
CHK HAPYE WU 09JUL2012
APVD YUZHONG MAO 09JUL2012

DIMENSIONS:

mm

0 PLC ±0.35
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±0.25
ANGLES ±0.25
FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

mm

0 PLC ±0.35
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±0.25
ANGLES ±0.25
FINISH -

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT

-

Customer Drawing

NAME

CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779C=1971774

SCALE

SHEET 2 OF 2

REV B