

HEADERS & RECEPTACLES

	~	TE CONNECTIVITY (TE) 14P MTA100 HDR ASSY SQ STR POL MTA MTA-100
mannet		1-640454-4 TE Internal Number: 1-640454-4
		Always EU RoHS/ELV Compliant
		Centerline 2.54 mm [.1 in]
		Number of Positions 14
✓ Active		PCB Mounting Orientation Vertical
PRODUCT DRAWING		PCB Mounting Style Through Hole
JD PDF		Number of Rows 1

Product Drawings	MTA100 HEADER ASSEMBLY, POLARIZED, NOTCHED, .025 SQUARE STRAIGHT POST, TIN PLATED PDF English
CAD Files	Customer View Model 2D_DXF.ZIP English 3D PDF PDF 3D
	Customer View Model 3D_IGS.ZIP English Customer View Model 3D_STP.ZIP
Catalog Pages/Data Sheets	English MTA, CST-100 II, SL-156 And AMP Economy Power (EP) Connectors PDF English

Please review product documents or **contact us** for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

 Product Type Features
 PCB Mounting Orientation
 Vertical

 Product Type
 Connector

 Connector Type
 Header

 Connector System
 Wire-to-Board

 Strain Relief
 Without


	Sealed Connector Style Applies To	No Plug Printed Circuit Board
Configuration Features	Number of Positions Number of Rows Backwall/Post Interruptions	14 1 Without
Electrical Characteristics	Operating Voltage (VAC)	250
Body Features	Header Type	Unshrouded
Contact Features	Contact Mating Area Plating Material Contact Mating Area Plating Thickness Underplate Material Underplate Material Thickness Contact Style Contact Style Tail Plating Material Contact Termination Area Plating Material Tail Plating Thickness Contact Type Contact Current Rating (A) Contact Layout Contact Base Material	Tin 3.81 µm [150 µin] Nickel 1.27 µm, 50 µin Straight Square Tin 3.81 µm [150 µin] Pin 5 Inline Copper Alloy
Termination Features	Termination Method to PC Board Termination Method to Wire/Cable	Through Hole - Solder Solder
Mechanical Attachment	PCB Mounting Style PCB Mount Alignment Mating Retention PCB Mount Retention Contact Retention Panel Mount Retention Mating Alignment	Through Hole Without Without Without Without Without


Housing Features	Centerline	2.54 mm [.1 in]
	Housing Color	Natural
	Housing Style	Polarized
	Housing Material	Polyester - GF
Dimensions	Tail Length	3.56 mm [.14 in]
	Mating Post Length	7.49 mm [.295 in]
	PCB Thickness (Recommended)	1.6 mm [.063 in]
	Height	7.75 mm [.305 in]
	Length	35.56 mm [1.4 in]
Usage Conditions	Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
Operation/Application	For Use With	MTA .100 Connector Assembly
	Pick and Place Cover	Without
Industry Standards	UL Flammability Rating	UL 94V-0
	UL File Number	E28476
	CSA Rating	Certified
	Agency/Standard	CSA, UL
	CSA File Number	LR7189
	UL Rating	Recognized
Packaging Features	Packaging Method	Package
	Packaging Quantity	1
Product Compliance	Statement of Compliance	

PDF

VIEW ALL PRODUCT COMPLIANCE

CUSTOMERS ALSO BOUGHT

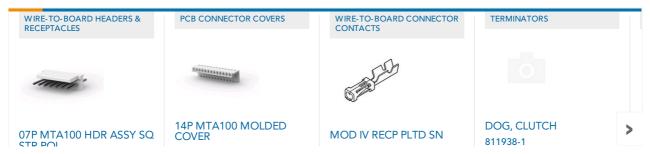

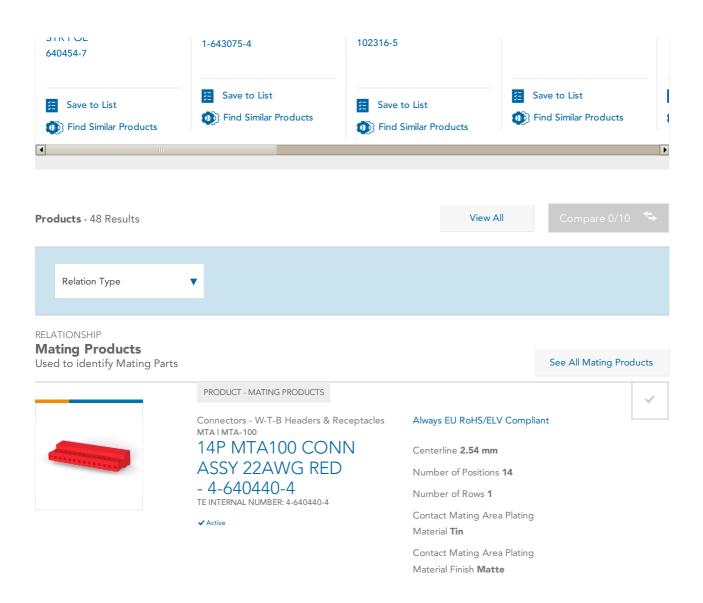

RELATIONSHIP **Mating Products** Used to identify Mating Parts



PRODUCT - MATING PRODUCTS

Connectors - W-T-B Headers & Receptacles MTA I MTA-100 14P MTA100 CONN ASSY F/T RED

- 4-640620-4 TE INTERNAL NUMBER: 4-640620-4

✓ Active

Always EU RoHS/ELV Compliant

Centerline **2.54 mm** Number of Positions **14**

Number of Rows **1**

Contact Mating Area Plating

Material **Tin**

Contact Mating Area Plating Material Finish **Matte**

RELATIONSHIP **Mating Products** Used to identify Mating Parts

See All Mating Products

See All Mating Products

PRODUCT - MATING PRODUCTS

Connectors - W-T-B Headers & Receptacles MTA | MTA-100 1 / CID N/T A 100 ACCV Always EU RoHS/ELV Compliant







✓ Active

Centerline 2.54 mm

Number of Positions **14**

Number of Rows 1

Contact Mating Area Plating Material **Tin**

Contact Mating Area Plating Material Finish **Matte**