

# SM4728 DATA SHEET

### SMA Female to BNC Male Adapter

SMA female to BNC male adapter part number SM4728 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to BNC adapter has a female to male gender configuration. SM4728 SMA female to BNC male adapter operates to 4 GHz. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
VSWR			1.2:1	
Operating Voltage (AC)			335	Vrms
DWV (AC)			1,500	Vrms
Insulation Resistance	5,000			MOhms

Electrical Specification Notes: Values at 25° C, sea level.

### **Mechanical Specifications**

Size	

Length Weight 1.06 in [26.92 mm] 0.02425 lbs [11 g]

Description	Connector 1	Connector 2
Туре	SMA Female	BNC Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Mating Cycles	500	500



# **Configuration:**

- SMA Female Connector 1
- BNC Male Connector 2
- 50 Ohms
- Straight Body Geometry

#### Features:

- VSWR of 1.2:1 max up to 4 GHz
- SMA interface meets MIL-STD-348
- BNC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

## **Applications:**

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





### **Material Specifications**

Description	Connector 1	Connector 2		
Туре	SMA Female	BNC Male		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	PTFE	PTFE		
Outer Contact Material	Passivated Stainless Steel			
Body Material		Brass		
Body Plating		Nickel		
Body Plating Spec.		QQ-N-290		

### **Environmental Specifications**

Temperature

Operating Range


-65 to +165 deg C

### **Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

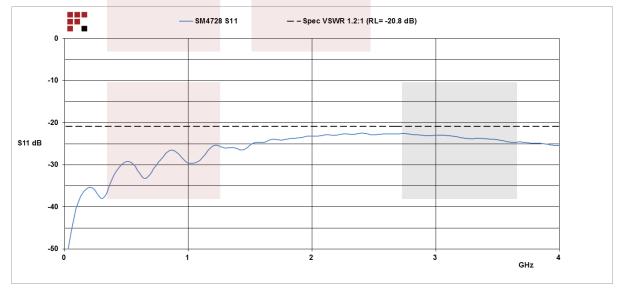





SMA Female to BNC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.


The information contained in this document is accurate to the best of our knowledge and representative of the part

For additional information on this product, please click the following link: SMA Female to BNC Male Adapter SM4728

URL: https://www.fairviewmicrowave.com/sma-female-bnc-male-adapter-sm4728-p.aspx

described herein. It may be necessar	sary to make modifications to the part and/or the documentation of the par	rt, in order
to implement improvements. Fairvie	ew Microwave reserves the right to make such changes as required. Unless	otherwise
stated, all specifications are nominal	al. Fairview Microwave does not make any representation or warranty reg	jarding the
suitability of the part described here	ein for any particular purpose, and Fairview Microwave does not assume a	ny liability
arising out of the use of any part or o	documentation.	



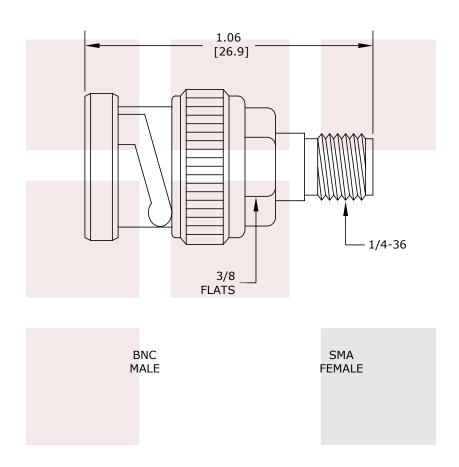

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
SMA Female to BNC Male Adapter	DWG NO CAGE CODE				BFKR5	
	CAD FILE 041316	SHEET	SCALE	E N/A	SIZE A	3045