

# SM4263 DATA SHEET

# **SMA Female to N Male Adapter**

SMA female to type N male adapter part number SM4263 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N adapter has a female to male gender configuration. SM4263 SMA female to type N male adapter operates to 18 GHz. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

# **Electrical Specifications**

| Description            | Min | Тур | Max   | Units |
|------------------------|-----|-----|-------|-------|
| Frequency Range        | DC  |     | 18    | GHz   |
| VSWR                   |     |     | 1.3:1 |       |
| Operating Voltage (AC) |     |     | 335   | Vrms  |
| DWV (AC)               |     |     | 1,000 | Vrms  |

Electrical Specification Notes: Values at 25°C, sea level.

# **Mechanical Specifications**

| <b>Size</b><br>Length<br>Width<br>Weight |             | 1.24 in [31.5 mm]<br>0.79 in [20.07 mm]<br>0.06834 lbs [31 g] |
|--|-------------|---|
| Description                              | Connector 1 | Connector 2   |
| Туре                                     | SMA Female  | N Male  |
| Polarity                                 | Standard    | Standard  |
| Hex Size                                 |             | 20 mm   |

#### **Material Specifications**

| Description Connector 1    |  |
|----------------------------|--|
| SMA Female                 | N Male   |
| Beryllium Copper           | Beryllium Copper   |
| Gold                       | Gold   |
| 1.3 µm minimum             | 1.3 µm minimum   |
| PTFE                       | PTFE   |
| Passivated Stainless Steel |  |
|                            | Passivated Stainless Steel                                       |
|                            | Passivated Stainless Steel                                       |
|                            | SMA Female<br>Beryllium Copper<br>Gold<br>1.3 µm minimum<br>PTFE |



# **Configuration:**

- SMA Female Connector 1
- N Male Connector 2
- 50 Ohms
- Straight Body Geometry

# Features:

- VSWR of 1.3:1 max up to 18 GHz
- 1.3 µm minimum contact plating
- Gold Plated Beryllium Copper Contact

# **Applications:**

- Enables Between Series
  Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





# **Environmental Specifications**

**Temperature** Operating Range


-45 to +120 deg C

### Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **Typical Performance Data**

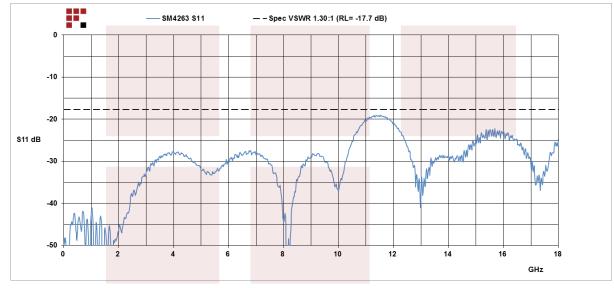

SMA Female to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMA Female to N Male Adapter SM4263


URL: https://www.fairviewmicrowave.com/sma-female-n-male-adapter-sm4263-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





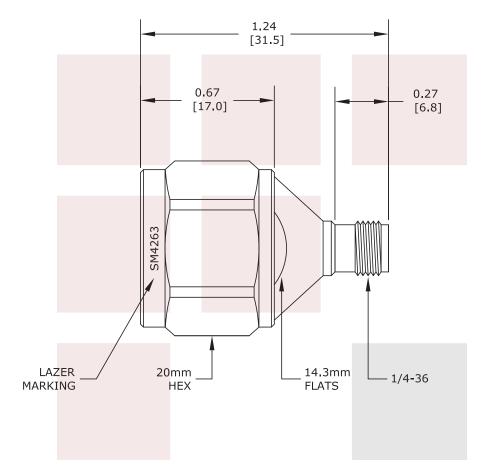

| FAIRVIEW MICROWAVE INC.      | NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm]. |        |      |                 |        |     |
|------------------------------|---|--------|------|-----------------|--------|-----|
| SMA Female to N Male Adapter | DWG NO  | SM4263 |      | CAGE CODE 3FKR5 |        |     |
|                              | CAD FILE 111115   | SHEET  | SCAL | E N/A           | SIZE A | 150 |

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689