

Low PIM N Female to 7/16 DIN Male Adapter
Low VSWR

Low PIM type N female to 7/16 DIN male adapter part number FMAD1035 from Fairview Microwave is in-stock and ships same day. This Fairview type N to 7/16 DIN adapter has a female to male gender configuration in a low PIM design. FMAD1035 type N female to 7/16 DIN male adapter operates to 8 GHz. The Fairview Microwave RF adapter provides a passive intermodulation of -168 dBc maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		8	GHz
Return Loss			-20	dB
Passive Intermodulation			-168	dBc
DWV (AC)			1,000	Vrms
Group Delay			225	ps

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 1	1 to 4	4 to 8			GHz
Return Loss, Max	-36	-25	-20			dB

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	2.27 in [57.66 mm]
Width	1.25 in [31.75 mm]
Weight	0.32 lbs [145.15 g]

Description	Connector 1	Connector 2
Type	N Female	7/16 DIN Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	IEC 169-4
Mating Cycles	500	500
Hex Size		32 mm



Configuration:

- N Female Connector 1
- 7/16 DIN Male Connector 2
- 50 Ohm
- Low PIM Design
- Straight Body Geometry

Features:

- PIM levels better than -168 dBc
- Type N interface meets MIL-STD-348
- 7/16 DIN interface meets IEC 169-4
- 200 µin minimum contact plating

Applications:

- Enables Between Series Connections
- General Purpose Test
- Low PIM Applications

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Material Specifications

Description	Connector 1	Connector 2
Type	N Female	7/16 DIN Male
Contact Material	Beryllium Copper	Brass
Contact Plating	Silver	Silver
Contact Plating Spec.	200 µin minimum	200 µin minimum
Insulation Material	PTFE	PTFE
Outer Contact Material	Brass	
Outer Contact Plating	Tri-Metal	
Outer Contact Plating Spec.	100 µin minimum	
Body Material		Brass
Body Plating		Tri-Metal
Body Plating Spec.		100 µin minimum
Coupling Nut Material		Brass
Coupling Nut Plating		Tri-Metal
Coupling Nut Plating Spec.		100 µin minimum

Environmental Specifications

Temperature


Operating Range -55 to +155 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

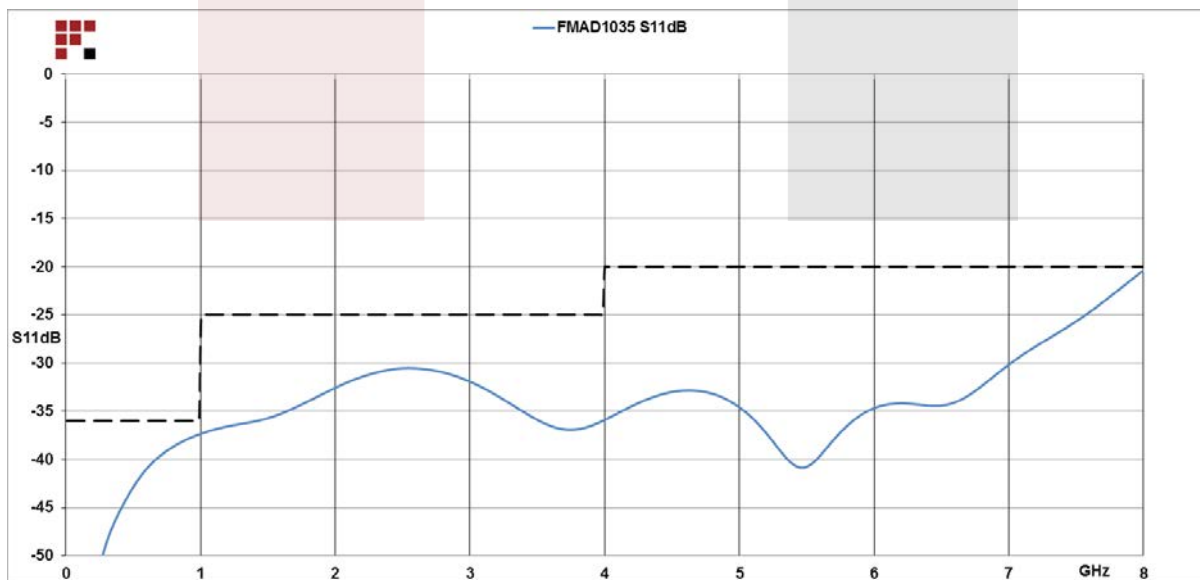


Low PIM N Female to 7/16 DIN Male Adapter Low VSWR from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Low PIM N Female to 7/16 DIN Male Adapter Low VSWR FMAD1035](#)

URL: <https://www.fairviewmicrowave.com/low-pim-n-female-7-16-male-adapter-fmad1035-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



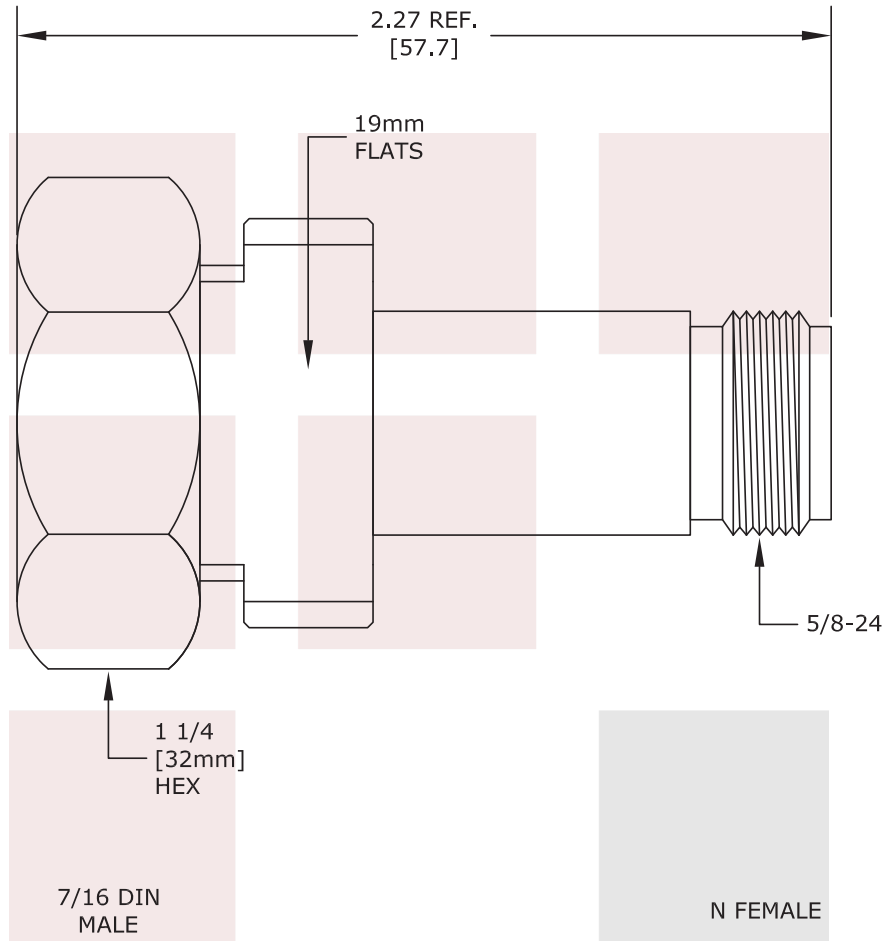

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Low PIM N Female to 7/16 DIN Male Adapter Low VSWR	DWG NO	FMAD1035		CAGE CODE 3FKR5	
	CAD FILE 120914	SHEET	SCALE N/A	SIZE A	2233