

Colson™ installation cable ties



0 319 16



0 319 28



(see p. 906)



0 319 57



0 319 02



0 319 96



Dimensions see e-catalogue

Black Colson U.V. protected cable ties

Conform to EN 50146 and IEC 62275

External teeth

Pack	Cat.Nos	Width (mm)		Flat length (mm)		Ø grip capacity (mm)		Tensile Strength (kg)
		min.	max.	min.	max.	min.	max.	
100/1000	0 319 10	9	9	123	22	4	36	36
100/1000	0 319 13	9	9	185	42	10	36	36
100/1000	0 319 16	9	9	262	62	26	53	53
100/1000	0 319 19	9	9	357	92	26	53	53
100/500	0 319 20	9	9	498	140	74	53	53
100	0 319 21	9	9	750	220	74	53	53
100	0 319 22	6	6	119	25	4	22	22
100/1000	0 319 25	6	6	180	45	10	22	22

Internal teeth

Easy manual tightening

Pack	Cat.Nos	Width (mm)	Flat length (mm)	Ø grip capacity (mm)	Tensile Strength (kg)	
100	0 319 28	7.6	128	22	8	36
100	0 319 29	7.6	194	42	15	45
100	0 319 30	7.6	260	62	15	45
100	0 319 32	7.6	359	92	15	45

Black U.V. protected bases

100/1000	0 319 55	Standard plug base Ø8 mm drilling (Ø7 mm smooth material)
100	0 319 58	Wall spacer plug base Ø8 mm drilling (Ø7 mm smooth material)
100	0 319 50	Screw-on base, can be fixed with plug Cat.No 0 319 57 or metal stud Ø7 mm pitch 150 or countersunk screw Ø5 mm

Black U.V. protected screw-in plug

100	0 319 57	For fixing screw-on base and cable ties with base Ø8 mm drilling (Ø7 mm smooth material) Threaded head Ø6.6 mm pitch 150 Supplied with punch for inserting pin
-----	----------	---

Black cable tie with U.V. protected base

100	0 319 02	Adjustable for conduits IRL Ø16 to 32 mm or for cable Ø13 to 38 mm Fixing by Ø7 mm thread 150 mm pin, screw in wall plugs Cat.No 0 319 57, screw Ø5 mm Can be fixed using Pulsa 700 E staple gun Low fire hazard For interior and exterior use - U.V. protected Black colour
-----	----------	---

Colson tool

1	0 319 96	Facilitates tightening and strip cut the nearest of Colson cable ties head
---	----------	--

Colson™ installation cable ties

Performance

Conform to EN 62275 type 1 (NFC 68-146)


"cable ties for electrical installations"

Test conditions:

- Temperature: 23 °C
- Relative humidity of air: 50 %
- Traction speed: 25.4 mm/min


Ratchet force

Cat.Nos	Ratchet force (daN)
0 319 10	4
0 319 13	4
0 319 16	5
0 319 19	5
0 319 20	5.5
0 319 21	5.5
0 319 22	4
0 319 25	4
0 319 28	1.5
0 319 29	1.5
0 319 30	1.5
0 319 32	1.5



Tensile strength

Cat.Nos	Tensile strength	
	Test Ø (mm) according to EN 50146	Min. strength (daN)
0 319 10	20	36
0 319 13	20	36
0 319 16	26	53
0 319 19	26	53
0 319 20	74	53
0 319 21	74	53
0 319 22	20	22
0 319 25	20	22
0 319 28	20	36
0 319 29	20	45
0 319 30	20	45
0 319 32	20	45

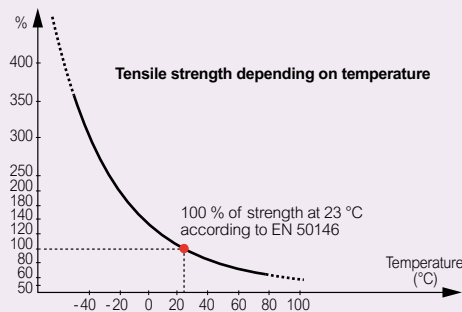

Temperature resistance

- operating (permanent use): from - 40 °C to + 85 °C
- from - 25 °C to + 60 °C for Cat.Nos 0 319 28/29/30/32
- operating (minimum): - 30 °C, 0 °C for Cat.Nos 0 319 28/29/30/32

Resistance to external agents

Good resistance to bases, oils, greases, saline mist, oil products, diluted acids

Fire resistance

- Flame retardant
- Conform to UL 94 requirements, HB classification
- Glow-wire flammability resistance according to IEC 60695-2-11: 650 °C
- Oxygen index (LOI) according to EN ISO 4589-1/ASTM D 2863-00: 20 %
- Low fire hazard polyamide

UV protected according to norm IEC 62275 type 1

UV protected black cable ties for outdoor use
These black cable ties have successfully undergone UV resistance and climatic ageing tests representing actual conditions of use
These cycles combine a 1000 hours radiance under arc or xenon lamp according to ISO 4892-2 method 1