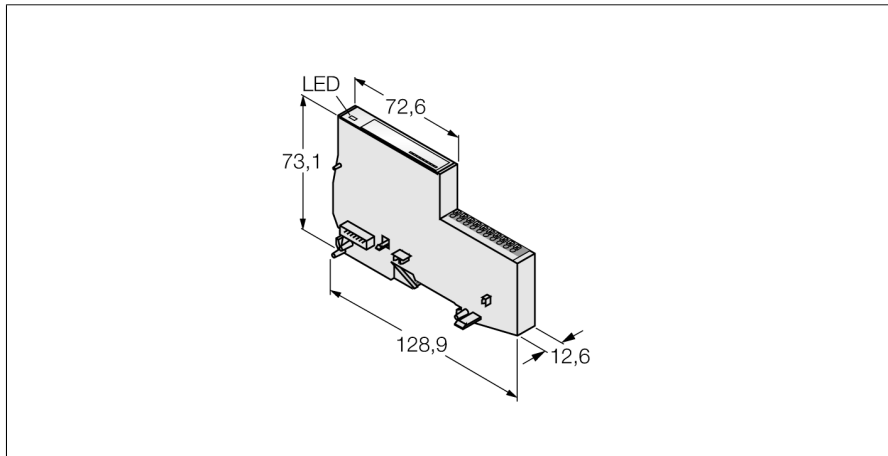


## BL20 Economy Module

### 8 Digital Outputs, PNP, 0.5 A

#### BL20-E-8DO-24VDC-0.5A-P



- Fieldbus-independent
- Electronics and connection technology in one housing
- Connectivity: Push-in terminals
- Protection class IP20
- 8 digital outputs, 24 VDC
- Max. 0.5 A
- P switching

#### Functional principle

Electronics and connection technology are integrated in the housing. A base module is not needed. Economy modules and modules with separate electronics and connection technology can be fitted into a station, provided the base modules feature tension spring connections.

The use of gateways makes economy modules completely independent from the higher level fieldbus.

<b>Type</b>	BL20-E-8DO-24VDC-0.5A-P
ID	6827226
<b>Number of channels</b>	8
Rated voltage from the supply terminal	24 VDC
Admissible range	18...30 VDC
Nominal current from field supply	≤ 3 mA
Nominal current from module bus	≤ 15 mA
Power dissipation, typical	≤ 1.5 W
<b>Output connectivity</b>	Push-in
<b>Output type</b>	PNP
Output voltage	24 VDC
Output current per channel	0.5 A
Output delay	0.3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Lamp load	< 6 W
Switching frequency, resistive	< 100 Hz
Switching frequency, lamp load	< 10 Hz
Short-circuit protection	yes
Simultaneity factor	1
Electrical isolation	electronics for the field level
<b>Dimensions (W x L x H)</b>	12.6 x 128.6 x 74.6 mm
Approvals	CE, cULus, zone 2, Class I, Div. 2
Ambient temperature	0...+55 °C
Storage temperature	-25...+85 °C
Relative humidity	15...95 %, no condensation allowed
Vibration test	Acc. to EN 61131
Shock test	Acc. to IEC 60068-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electromagnetic compatibility	Acc. to EN 50082-2
Protection class	IP20
MTTF	1008 years acc. to SN 29500 (Ed. 99) 20 °C



**BL20 Economy Module**  
**8 Digital Outputs, PNP, 0.5 A**  
**BL20-E-8DO-24VDC-0.5A-P**

**Terminal assignment**

	<p><b>Digital Outputs</b></p>	<p><b>Pin Assignment</b></p> 
---	-------------------------------	--

**BL20 Economy Module**  
**8 Digital Outputs, PNP, 0.5 A**  
**BL20-E-8DO-24VDC-0.5A-P**

**Accessories**

Type code	Ident-No.		Dimension drawing
BL20-E-10GNDL	100001336	BL20 ECO module with 10 connection terminals for wiring GND potential from the UL field supply	 <p>Technical drawing showing dimensions for the BL20-E-10GNDL module: LED indicator height 73.1, module width 72.6, terminal block length 128.9, and terminal block offset 12.6.</p>
BL20-E-16GNDL	100001338	BL20 ECO module with 16 connection terminals for wiring GND potential from the UL field supply	 <p>Technical drawing showing dimensions for the BL20-E-16GNDL module: LED indicator height 74.5, module width 72.6, terminal block length 160, and terminal block offset 12.6.</p>