


BES 516-371-G-E5-C-S49 BES00ZU



IND. CONT. EQ
81U2
US for use in the secondary of
a class 2 source of supply
Environmental - Type 1 Enclosure

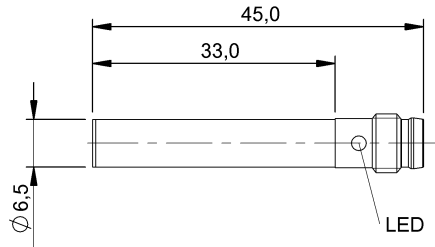

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M8x1-Connector, 3-pole
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Hysteresis H max. (% of Sr)	15.0 %
Load capacitance max. at Ue	0.5 μ F
MTTF (40 °C)	830 a
No-load current I _o max., undamped	3 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	33.0 kOhm + D
Pollution degree	3
Protected against miswiring	yes
Rated insulation voltage U _i	75 V DC
Rated operating current I _e DC	200 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	20 ms
Repeat accuracy max. (% of Sr)	5.0 %
Residual current I _r max.	20 μ A
Switching frequency	1500 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Protection type IEC 60529	IP67

Internet	www.balluff.com
Balluff Germany	+49 (0) 7158 173-0, 173-370
Balluff USA	1-800-543-8390
Balluff China	+86 (0) 21-50 644131

Functional safety

Diagnostic coverage	0 %
Functional safety	no
Mission Time	20 a

General data

Approval/Conformity	cULus CE EAC
Basic standard	IEC 60947-5-2

Material

Housing material	Stainless steel
Material sensing surface	PBT

Mechanical data

Dimension	\varnothing 6.5 x 45 mm
Installation	for flush mounting
Size	D6.5

Output/Interface

Switching output	PNP Normally open (NO)
------------------	------------------------

Range/Distance

Assured operating distance S _a	1.6 mm
Range	2 mm
Rated operating distance S _n	2 mm
Ripple max. (% of U _e)	15 %
Switching distance marking	■
Temperature drift max. (% of Sr)	10 %

For definitions of terms, see main catalog
Subject to change without notice

eCl@ss 9.1: 27-27-01-01
ETIM 6.0: EC002714
BES00ZU_09-03-17_16:38

BES 516-371-G-E5-C-S49 BES00ZU

Remarks

The sensor is functional again after the overload has been eliminated.
Shielded: See installation instructions for inductive sensors with extended range 825357.

For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.

Connector view



Wiring Diagram

