


Professionally approved products.

Datasheet

10m Fibre Optic Cable Assembly

RS Stock number 135-569

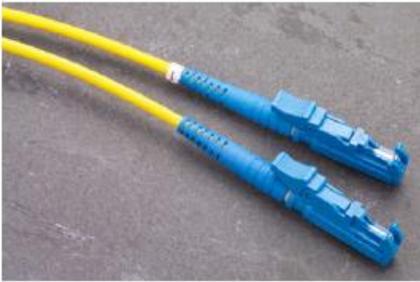

Description:

Optical fibre patch cords are a defining factor in ensuring your network performs to the highest level.

A patchwork can be split into three key components;

- The connector
- The cable
- The manufacturing process

These three areas all contribute to the performance of a patch cord but it is the manufacturing fibre optic cable assemblies, from using Biconic and SMA through to ST, SC to todays small form factor (SFF) connectors like the LC, MU or MT-RJ.

Features:

- Multimode & singlemode applications ST/SC/FC/E2000/MU connector types
- Ultra polish & angle polish options available, all terminations are manufactured to exceed performance parameters set by industry standards
- Fast turn around of non-standard requirements
- Full traceability & test certification supplied with each assembly
- 900µm tight buffered fibre optic cable

Professionally approved products. Datasheet

Patchcord Specification

Mechanical

Length: 1m to 10m \pm 10mm
Other lengths available to order

Split Length (Duplex): 150mm \pm 5mm

Product Packaging

Each patch cord is packaged individually and individually identified for traceability, test certification is supplied for each assembly.

Optical fibre and cable performance

Attenuation (dB/km)

(1310/1550) 0.38/0.24

Sheath colour

Yellow

Strength Members

Aramid strength members

Fire Performance

LSZH for Internal/External Applications
Flame Resistance IEC 60332-1

Connector Specification

Optical Performance (Singlemode)

Insertion loss: Max. 0.3 dB Typical 0.2 dB
Return Loss: UPC > 50dB, APC >60dB

Optical Performance (MT-RJ)

Insertion loss: Max. 0.5 dB

Operating Temperature

-40°C to +85°C

Intermateability Optically and mechanically compatible with all equivalent connectors.

Compliant with IEC 874-14.