

MECHANICAL LATCH AC/DC 24V FOR MOTOR CONTACTORS SZ S0



General technical data:

product brand name		SIRIUS
Product designation		mechanical latch
Size of contactor		S0
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 Rated value	V	690
Apparent power loss of the magnet coil at AC typical	V·A	4
Active power loss of the magnet coil at DC typical	W	4
Pulse duration for switching off		
• at AC	ms	18 ... 31
• at DC	ms	18 ... 26
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-25 ... +60

Auxiliary circuit:

Number of NC contacts		
• for auxiliary contacts instantaneous contact		0

<ul style="list-style-type: none"> • for auxiliary contacts lagging switching 		0
<ul style="list-style-type: none"> • for auxiliary contacts 		0
Number of NO contacts		
<ul style="list-style-type: none"> • for auxiliary contacts instantaneous contact 		0
<ul style="list-style-type: none"> • for auxiliary contacts leading contact 		0
<ul style="list-style-type: none"> • for auxiliary contacts 		0

Control circuit/ Control:

Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency		
<ul style="list-style-type: none"> • 1 Rated value 	Hz	50
<ul style="list-style-type: none"> • 2 Rated value 	Hz	60
Control supply voltage 1		
<ul style="list-style-type: none"> • at DC Rated value 	V	24
<ul style="list-style-type: none"> • at AC 		
— at 50 Hz Rated value	V	24
— at 60 Hz Rated value	V	24
Operating range factor control supply voltage rated value of the magnet coil		0.85 ... 1.1
<ul style="list-style-type: none"> • at AC at 50 Hz 		0.85 ... 1.1
<ul style="list-style-type: none"> • at AC at 60 Hz 		0.85 ... 1.1
<ul style="list-style-type: none"> • at DC 		0.85 ... 1.1

Installation/ mounting/ dimensions:

Mounting type		clip-on
mounting position		any
Width	mm	22
Height	mm	48.4
Depth	mm	84.3

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Type of connectable conductor cross-section		
<ul style="list-style-type: none"> • for auxiliary contacts 		
— solid		2x (0.5 ... 2.5 mm ²), 1x 4 mm ²
— finely stranded		
— with core end processing		2x (0.5 ... 2.5 mm ²), 1x 2.5 mm ²
• for AWG conductors for auxiliary contacts		2x 14, 1x 12

Certificates/ approvals:

Certificate of suitability		CE / UL / CSA / CCC
-----------------------------------	--	---------------------

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Typprüfbescheinigung/Werkszeugnis](#)

[spezielle Prüfbescheinigungen](#)

other

[Umweltbestätigung](#)

[Bestätigungen](#)



Further information


Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>


Industry Mall (Online ordering system)
<http://www.siemens.com/industrymall>

Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT29263AB31>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RT29263AB31>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT29263AB31&lang=en

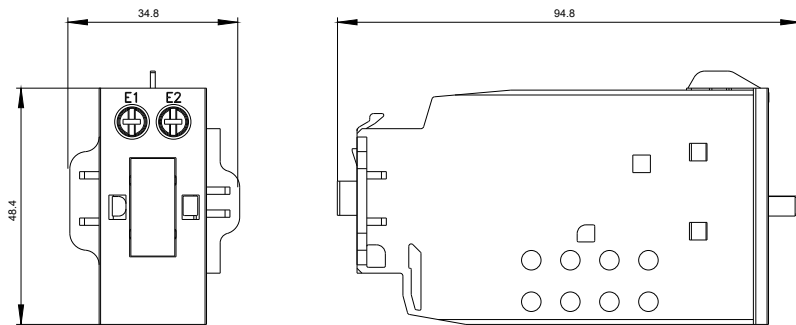

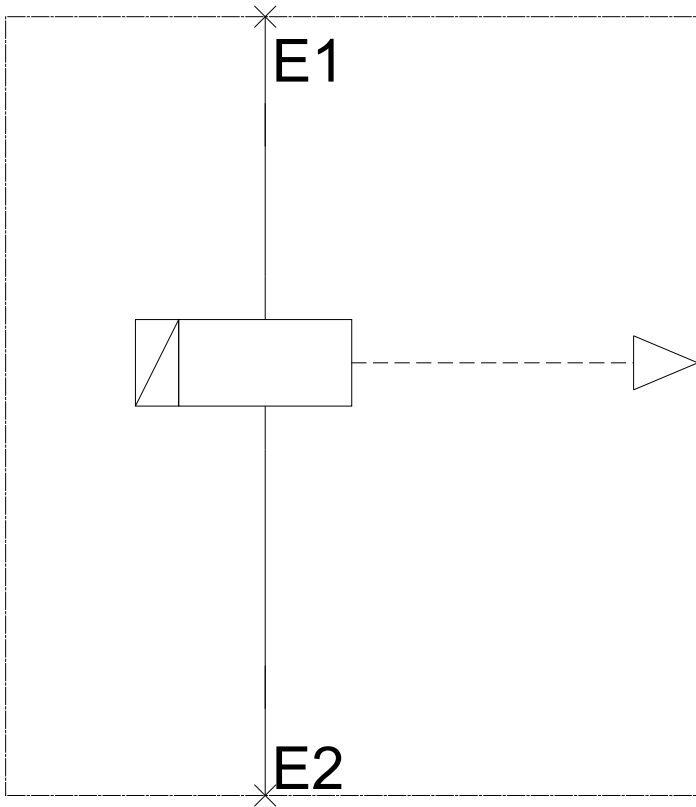

last modified:

15.10.2015